



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]2006 = 24.6

IBM System x iDataPlex dx340 (Intel Xeon E5450)

SPECfp_base2006 = 23.4

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

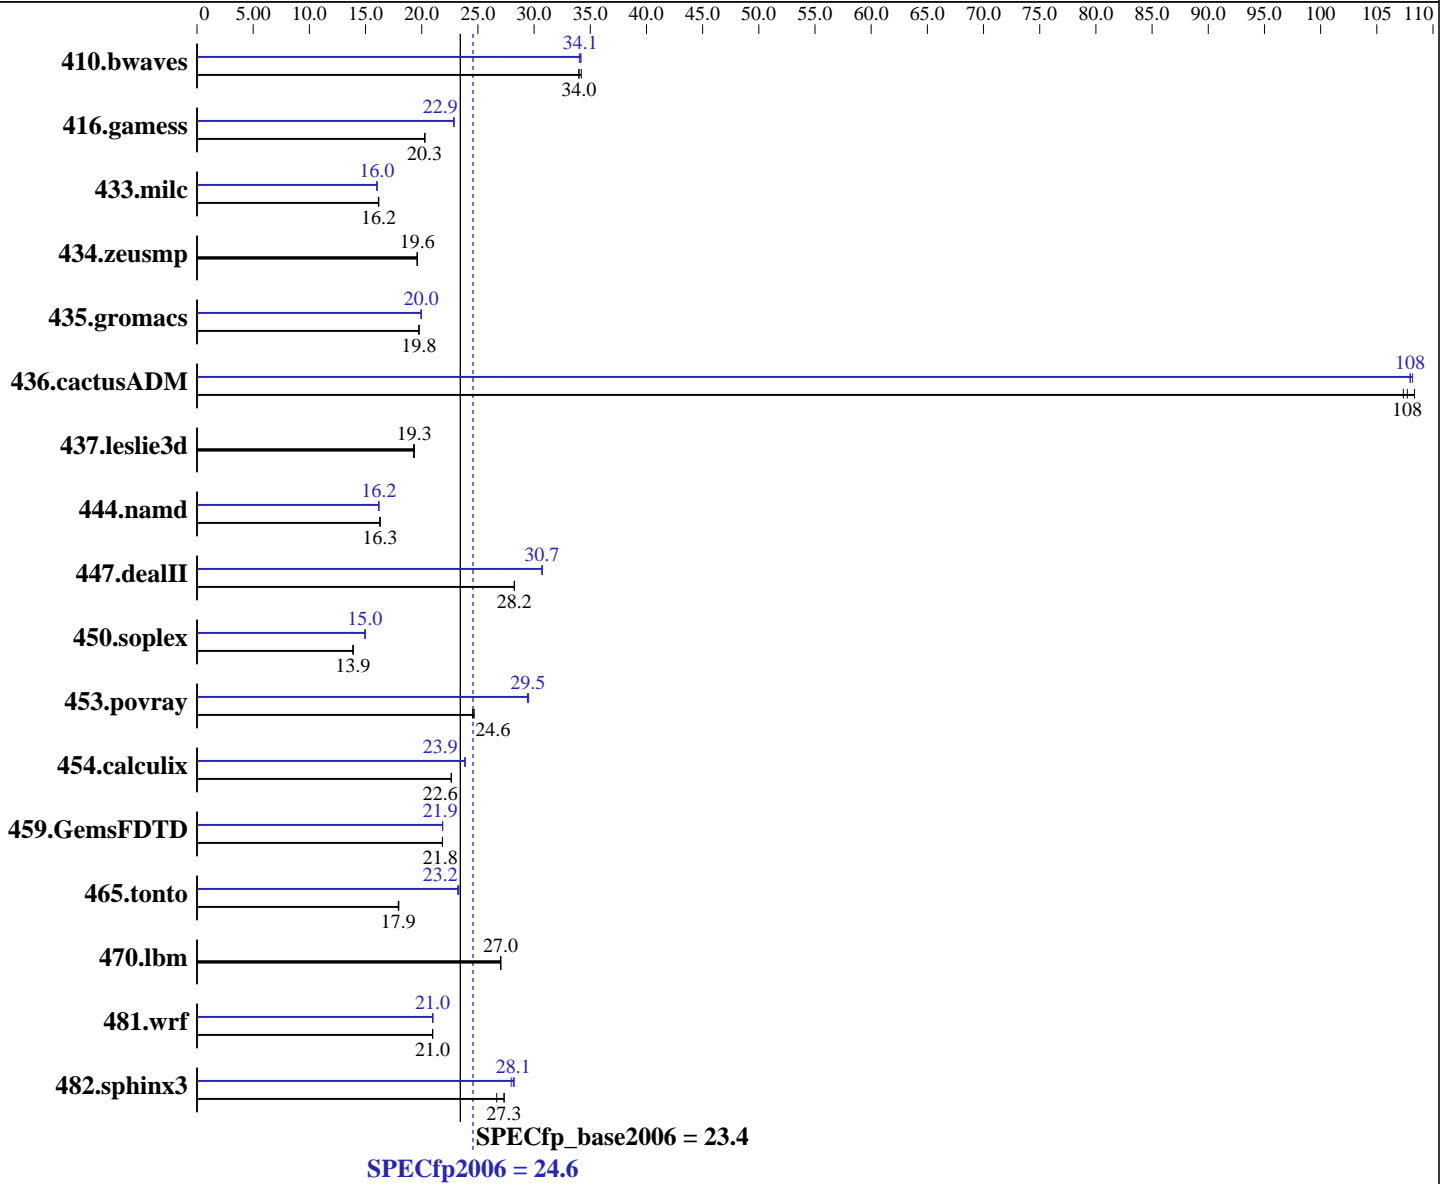

Hardware

CPU Name: Intel Xeon E5450
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 24.6

IBM System x iDataPlex dx340 (Intel Xeon E5450)

SPECfp_base2006 = 23.4

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4 x 4 GB PC2-5300F ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	400	34.0	397	34.2	400	34.0	399	34.0	398	34.1	398	34.2
416.gamess	966	20.3	965	20.3	967	20.2	856	22.9	856	22.9	857	22.9
433.milc	569	16.1	567	16.2	568	16.2	573	16.0	573	16.0	573	16.0
434.zeusmp	464	19.6	464	19.6	464	19.6	464	19.6	464	19.6	464	19.6
435.gromacs	361	19.8	362	19.7	361	19.8	358	19.9	358	20.0	358	20.0
436.cactusADM	110	108	111	108	111	107	111	108	110	108	111	108
437.leslie3d	486	19.3	486	19.3	488	19.3	486	19.3	486	19.3	488	19.3
444.namd	492	16.3	493	16.3	492	16.3	496	16.2	495	16.2	496	16.2
447.dealII	405	28.2	405	28.3	405	28.2	373	30.7	372	30.7	373	30.7
450.soplex	600	13.9	601	13.9	600	13.9	557	15.0	558	14.9	557	15.0
453.povray	217	24.5	216	24.7	216	24.6	181	29.4	181	29.5	180	29.5
454.calculix	365	22.6	365	22.6	365	22.6	346	23.9	346	23.9	346	23.8
459.GemsFDTD	486	21.8	486	21.8	486	21.9	485	21.9	485	21.9	486	21.8
465.tonto	548	18.0	549	17.9	549	17.9	422	23.3	424	23.2	424	23.2
470.lbm	509	27.0	509	27.0	508	27.1	509	27.0	509	27.0	508	27.1
481.wrf	532	21.0	533	21.0	533	21.0	532	21.0	532	21.0	532	21.0
482.sphinx3	731	26.7	713	27.3	713	27.3	697	28.0	690	28.2	692	28.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
Memory Configuration set to "Performance Optimized"
Hardware Prefetcher Enable and Adjacent Cache Line Prefetch Enable

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 24.6

IBM System x iDataPlex dx340 (Intel Xeon E5450)

SPECfp_base2006 = 23.4

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 24.6

IBM System x iDataPlex dx340 (Intel Xeon E5450)

SPECfp_base2006 = 23.4

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
             -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
             -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
            -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
            -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -fno-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 24.6

IBM System x iDataPlex dx340 (Intel Xeon E5450)

SPECfp_base2006 = 23.4

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

470.ibm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 24.6

IBM System x iDataPlex dx340 (Intel Xeon E5450)

SPECfp_base2006 = 23.4

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090805.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090805.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:12:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.