



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5240

SPECint_rate2006 = 183

SPECint_rate_base2006 = 171

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Feb-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

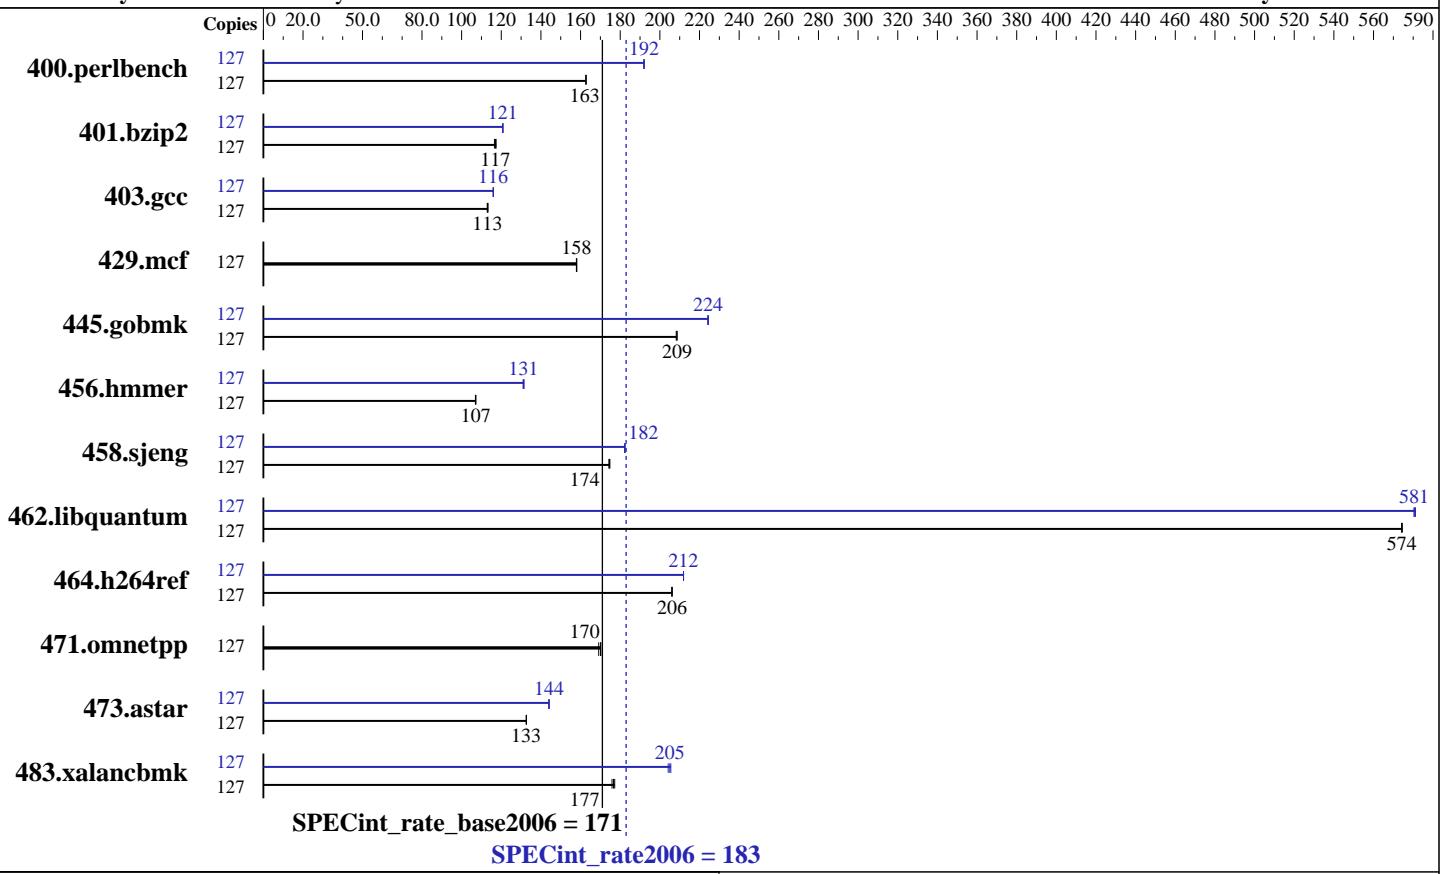

Hardware

CPU Name:	UltraSPARC T2 Plus
CPU Characteristics:	1582
CPU MHz:	Integrated
FPU:	16 cores, 2 chips, 8 cores/chip, 8 threads/core
CPU(s) enabled:	2 chips
CPU(s) orderable:	Primary Cache: 16 KB I + 8 KB D on chip per core Secondary Cache: 4 MB I+D on chip per chip L3 Cache: None Other Cache: None
Memory:	128 GB (32 x 4 GB)
Disk Subsystem:	748 GB RAID 0 using Solaris Volume Manager on 8x 10K RPM SUN146G SAS blocksize 384 KB
Other Hardware:	None

Software

Operating System:	Solaris 10 10/08
Compiler:	Sun Studio 12 Update 1 and gccfss V4.2.1 (see additional detail below)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5240

SPECint_rate2006 = 183

SPECint_rate_base2006 = 171

CPU2006 license: 6

Test date: Feb-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	127	7625	163	7626	163	7625	163	127	6466	192	6457	192	6462	192
401.bzip2	127	10515	117	10469	117	10439	117	127	10149	121	10148	121	10140	121
403.gcc	127	9046	113	9051	113	9020	113	127	8816	116	8813	116	8816	116
429.mcf	127	7335	158	7332	158	7325	158	127	7335	158	7332	158	7325	158
445.gobmk	127	6385	209	6397	208	6385	209	127	5936	224	5938	224	5943	224
456.hmmer	127	11063	107	11077	107	11057	107	127	9010	132	9041	131	9035	131
458.sjeng	127	8807	174	8792	175	8815	174	127	8422	182	8427	182	8434	182
462.libquantum	127	4583	574	4583	574	4580	575	127	4533	581	4534	580	4528	581
464.h264ref	127	13643	206	13632	206	13629	206	127	13261	212	13260	212	13261	212
471.omnetpp	127	4668	170	4692	169	4663	170	127	4668	170	4692	169	4663	170
473.astar	127	6722	133	6722	133	6719	133	127	6193	144	6186	144	6184	144
483.xalancbmk	127	4962	177	4945	177	4983	176	127	4292	204	4275	205	4264	206

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

This result was measured with pre-release build 36.0 of Sun Studio 12 Update 1

Peak also uses "GCC for SPARC Systems 4.2.1", which combines gcc with the Sun Code Generator for SPARC systems. It is invoked as "gcc", and accepts source code compatible with GCC 4.2.

For more information, including support, see
<http://cooltools.sunsource.net/gcc/>

Submit Notes

A processor set was created using
`psrset -c 1-127`
and the runspec process was placed into the set using
`psrset -e 1`
The config file option 'submit' was used to select specific processors within the set, along with the pbind command.

Operating System Notes

`ulimit -s 131072` was used to allow the stack to grow up to 131072 KB (aka 128 MB). Note that saying "131072" is preferable to "unlimited", because there is a tradeoff
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5240

SPECint_rate2006 = 183

SPECint_rate_base2006 = 171

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Feb-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

Operating System Notes (Continued)

between space for the stack vs. space for the heap.

```
/etc/system parameters
autoup=600
    Causes pages older than the listed number of seconds to
    be written by fsflush.
bufhwm=3000
    Memory byte limit for caching I/O buffers
segmap_percent=1
    Set maximum percent memory for file system cache
tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
tsb_rss_factor=128
    Suggests that the size of the TSB (Translation Storage Buffer)
    may be increased if it is more than 25% (128/512) full. Doing so
    may reduce TSB traps, at the cost of additional kernel memory.
```

The "webconsole" service was turned off using
svcadm disable webconsole

The system had 206 GB of swap space.
The ufs fragment size was set to 8192

Platform Notes

This result was measured on a Sun SPARC Enterprise T5240.
The Sun SPARC Enterprise T5240 and the Fujitsu SPARC
Enterprise T5240 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
        403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5240

SPECint_rate2006 = 183

SPECint_rate_base2006 = 171

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Feb-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

Base Optimization Flags

C benchmarks:

```
-g -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto -xalias_level=std  
-M /usr/lib/ld/map.bssalign
```

C++ benchmarks:

```
-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto  
-xdepend -xalias_level=compatible -M /usr/lib/ld/map.bssalign
```

Base Other Flags

C benchmarks:

```
-xjobs=32 -V -#
```

C++ benchmarks:

```
-xjobs=32 -verbose=diags,version
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
cc
```

403.gcc: gcc

456.hmmr: gcc

C++ benchmarks:

```
CC
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xprefetch=no%auto -M /usr/lib/ld/map.bssalign  
-xalias_level=std -xipo=2 -Xc -xrestrict -lfast
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5240

SPECint_rate2006 = 183

SPECint_rate_base2006 = 171

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Feb-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

Peak Optimization Flags (Continued)

401.bzip2: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -Wl,-M,/usr/lib/ld/map.bssalign -xipo=2
-xalias_level=std

429.mcf: basepeak = yes

445.gobmk: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -M /usr/lib/ld/map.bssalign
-xalias_level=std -xrestrict

456.hmmr: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-Wl,-M,/usr/lib/ld/map.bssalign -xipo=2 -xalias_level=std

458.sjeng: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -M /usr/lib/ld/map.bssalign -xipo=2

462.libquantum: -g -fast -xpagesize=4M -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access
-M /usr/lib/ld/map.bssalign -xipo=2 -xalias_level=std

464.h264ref: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -M /usr/lib/ld/map.bssalign -xipo=2
-xalias_level=std

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize_heap=4M
-xpagesize_stack=64K -xprefetch=no%auto -xdepend
-xalias_level=compatible -M /usr/lib/ld/map.bssalign
-xipo=2 -xarch=v8plusb -lfast -lbsdmalloc

483.xalancbmk: -g0 -library=stlport4 -fast -xpagesize=4M
-xprefetch=no%auto -xdepend -xalias_level=compatible
-M /usr/lib/ld/map.bssalign -xipo=2 -lfast



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 183

Sun SPARC Enterprise T5240

SPECint_rate_base2006 = 171

CPU2006 license: 6

Test date: Feb-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

Peak Other Flags

C benchmarks (except as noted below):

-xjobs=32 -V -#

403.gcc: -v

456.hammer: -v

C++ benchmarks:

-xjobs=32 -verbose=diags,version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r3.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r3.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:14:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 August 2009.