SPEC® CFP2006 Result

IBM Corporation

IBM System x3250 M2 (Intel Core 2 Duo E7400)

SPECfp®_rate2006 = 30.3

SPECfp_rate_base2006 = 30.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Nov-2008

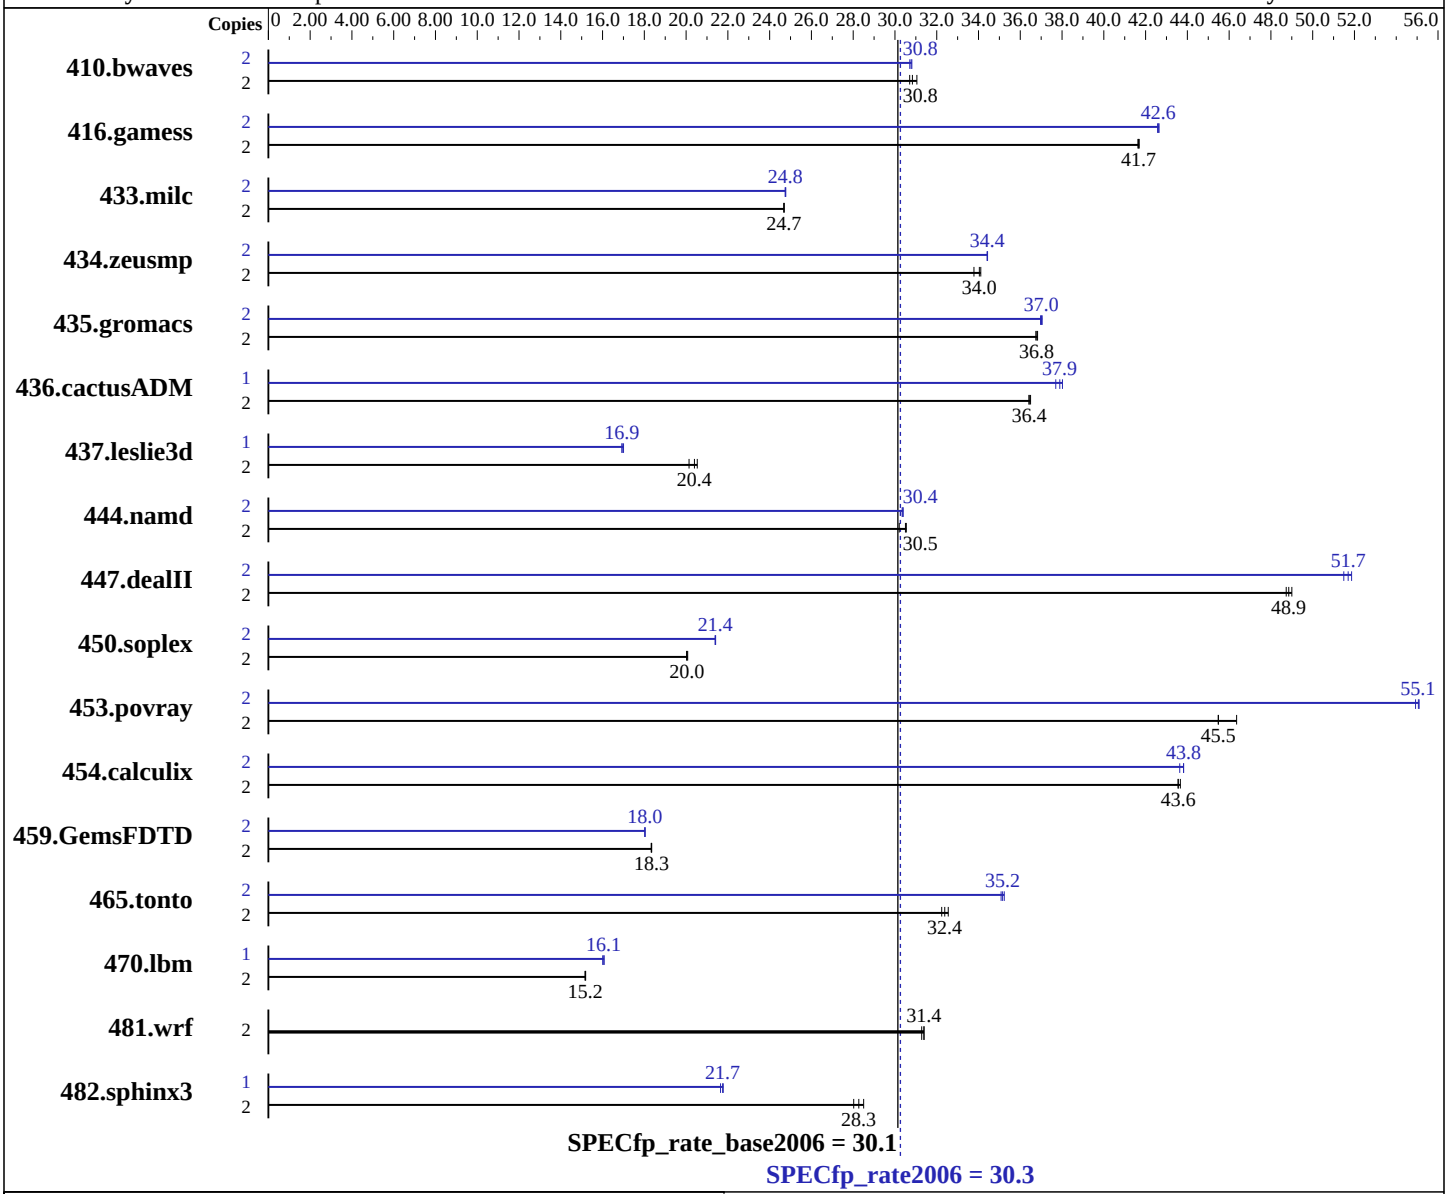

Hardware

CPU Name:	Intel Core 2 Duo E7400
CPU Characteristics:	1067 MHz system bus
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	3 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10(x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

IBM Corporation

IBM System x3250 M2 (Intel Core 2 Duo E7400)

SPECfp_rate2006 = 30.3

SPECfp_rate_base2006 = 30.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 8 GB(4 x 2 GB DDR2-6400E ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	875	31.1	**881**	**30.8**	885	30.7	2	885	30.7	882	30.8	**883**	**30.8**
416.gamess	2	939	41.7	**940**	**41.7**	941	41.6	2	920	42.6	918	42.6	**919**	**42.6**
433.milc	2	**744**	**24.7**	744	24.7	744	24.7	2	741	24.8	**742**	**24.8**	742	24.7
434.zeusmp	2	534	34.1	539	33.8	**535**	**34.0**	2	529	34.4	**529**	**34.4**	529	34.4
435.gromacs	2	388	36.8	**388**	**36.8**	389	36.7	2	**386**	**37.0**	386	37.0	385	37.0
436.cactusADM	2	**656**	**36.4**	656	36.4	655	36.5	1	317	37.7	**315**	**37.9**	314	38.0
437.leslie3d	2	933	20.1	916	20.5	**922**	**20.4**	1	555	16.9	553	17.0	**555**	**16.9**
444.namd	2	525	30.5	**526**	**30.5**	531	30.2	2	529	30.3	528	30.4	**528**	**30.4**
447.dealII	2	**468**	**48.9**	467	49.0	469	48.7	2	444	51.5	441	51.9	**443**	**51.7**
450.soplex	2	831	20.1	833	20.0	**832**	**20.0**	2	**780**	**21.4**	780	21.4	779	21.4
453.povray	2	234	45.5	**234**	**45.5**	230	46.4	2	**193**	**55.1**	193	55.1	194	54.9
454.calculix	2	378	43.7	379	43.6	**379**	**43.6**	2	377	43.8	378	43.6	**377**	**43.8**
459.GemsFDTD	2	**1157**	**18.3**	1158	18.3	1156	18.4	2	1177	18.0	**1177**	**18.0**	1177	18.0
465.tonto	2	610	32.2	**608**	**32.4**	605	32.6	2	561	35.1	**560**	**35.2**	559	35.2
470.lbm	2	**1812**	**15.2**	1812	15.2	1809	15.2	1	858	16.0	855	16.1	**856**	**16.1**
481.wrf	2	**712**	**31.4**	712	31.4	714	31.3	2	**712**	**31.4**	712	31.4	714	31.3
482.sphinx3	2	1368	28.5	**1379**	**28.3**	1391	28.0	1	895	21.8	**896**	**21.7**	900	21.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
taskset was used to bind processes to cores except
for 436.cactusADM peak
Hardware Sector Prefetch Enable and Adjacent Sector Prefetch Enable
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):
ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090827.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090827.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Sep 23 18:18:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2009.