



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### SPECint<sup>®</sup>\_rate2006 = 215

### Motherboard H8DA3-2, AMD Opteron 2439 SE

### SPECint\_rate\_base2006 = 168

CPU2006 license: 001176


Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

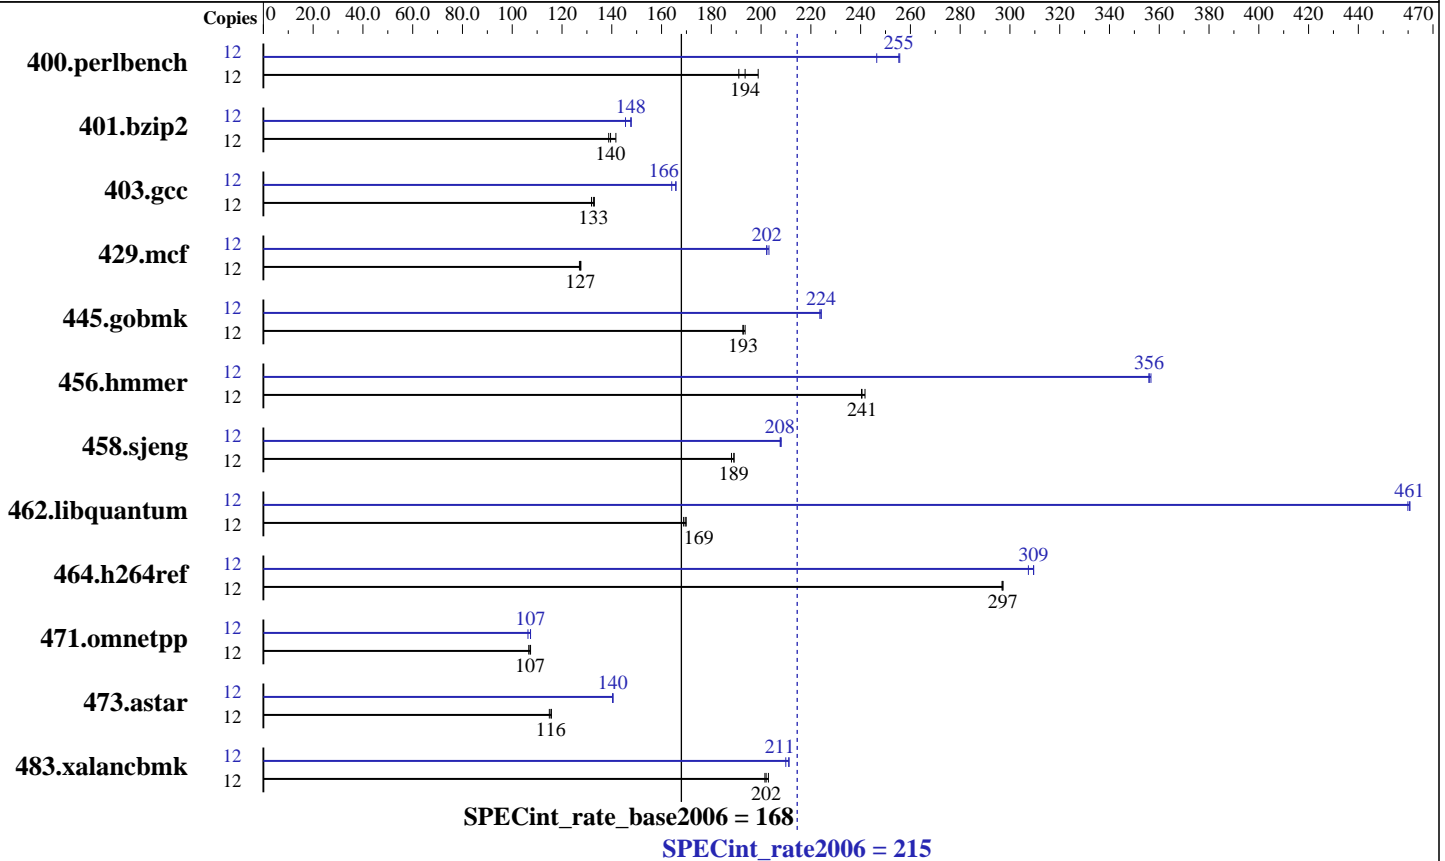

### Hardware

CPU Name: AMD Opteron 2439 SE  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 2 (Local multiuser without remote network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint\_rate2006 = 215

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECint\_rate\_base2006 = 168

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Aug-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

### Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	12	590	199	614	191	<b>606</b>	<b>194</b>	12	476	246	<b>459</b>	<b>255</b>	458	256		
401.bzip2	12	817	142	834	139	<b>830</b>	<b>140</b>	12	796	146	783	148	<b>784</b>	<b>148</b>		
403.gcc	12	<b>728</b>	<b>133</b>	726	133	733	132	12	583	166	589	164	<b>583</b>	<b>166</b>		
429.mcf	12	<b>859</b>	<b>127</b>	862	127	858	128	12	<b>541</b>	<b>202</b>	541	202	539	203		
445.gobmk	12	<b>653</b>	<b>193</b>	653	193	650	194	12	<b>562</b>	<b>224</b>	562	224	563	224		
456.hammer	12	<b>465</b>	<b>241</b>	463	242	466	240	12	<b>315</b>	<b>356</b>	315	356	314	357		
458.sjeng	12	772	188	<b>768</b>	<b>189</b>	768	189	12	698	208	<b>699</b>	<b>208</b>	699	208		
462.libquantum	12	1472	169	<b>1467</b>	<b>169</b>	1463	170	12	541	460	540	461	<b>540</b>	<b>461</b>		
464.h264ref	12	894	297	<b>894</b>	<b>297</b>	895	297	12	864	307	858	310	<b>858</b>	<b>309</b>		
471.omnetpp	12	703	107	<b>700</b>	<b>107</b>	699	107	12	705	106	699	107	<b>699</b>	<b>107</b>		
473.astar	12	733	115	728	116	<b>729</b>	<b>116</b>	12	600	140	600	140	<b>600</b>	<b>140</b>		
483.xalancbmk	12	<b>410</b>	<b>202</b>	408	203	411	202	12	394	210	<b>392</b>	<b>211</b>	392	211		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

### General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/spec/amd0905is-libs/64:/spec/amd0905is-libs/32"  
PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

System was tested in an open environment.  
To ensure system stability, a 550W (minimum) ATX power supply  
[ 4-pin (+12V), 8-pin (+12V) and 24-pin are required ]

Product description can be obtained at:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 215

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECint\_rate\_base2006 = 168

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## General Notes (Continued)

<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DA3-2.cfm>

## Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-march=barcelona -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

-march=barcelona -Ofast -m32 -INLINE:aggressive=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks (except as noted below):

openc

456.hmmer: pgcc

C++ benchmarks (except as noted below):

openCC

473.astar: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 215

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECint\_rate\_base2006 = 168

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
            -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
            -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
            -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
            -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 215

Motherboard H8DA3-2, AMD Opteron 2439 SE

SPECint\_rate\_base2006 = 168

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Aug-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
-OPT:alias=disjoint -WOPT:if\_conv=0 -m32  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge  
-Msafeptr=global -Mfp relaxed --zc\_eh -tp shanghai-32  
-Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>  
[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090914.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html)  
<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECint\_rate2006 = 215**

Motherboard H8DA3-2, AMD Opteron 2439 SE

**SPECint\_rate\_base2006 = 168**

**CPU2006 license:** 001176

**Test date:** Aug-2009

**Test sponsor:** Supermicro

**Hardware Availability:** Jun-2009

**Tested by:** Supermicro

**Software Availability:** Apr-2009

You can also download the XML flags sources by saving the following links:

- <http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>
- [http://www.spec.org/cpu2006/flags/pg180\\_linux\\_flags.20090914.xml](http://www.spec.org/cpu2006/flags/pg180_linux_flags.20090914.xml)
- <http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:54:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 September 2009.