



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

### SPECint®\_rate2006 = 237

ASUS RS500A-X6 (KCNR-D12) server system  
(AMD Opteron 4184, 2.80GHz)

### SPECint\_rate\_base2006 = 204

CPU2006 license: 9016


Test date: Dec-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jul-2010

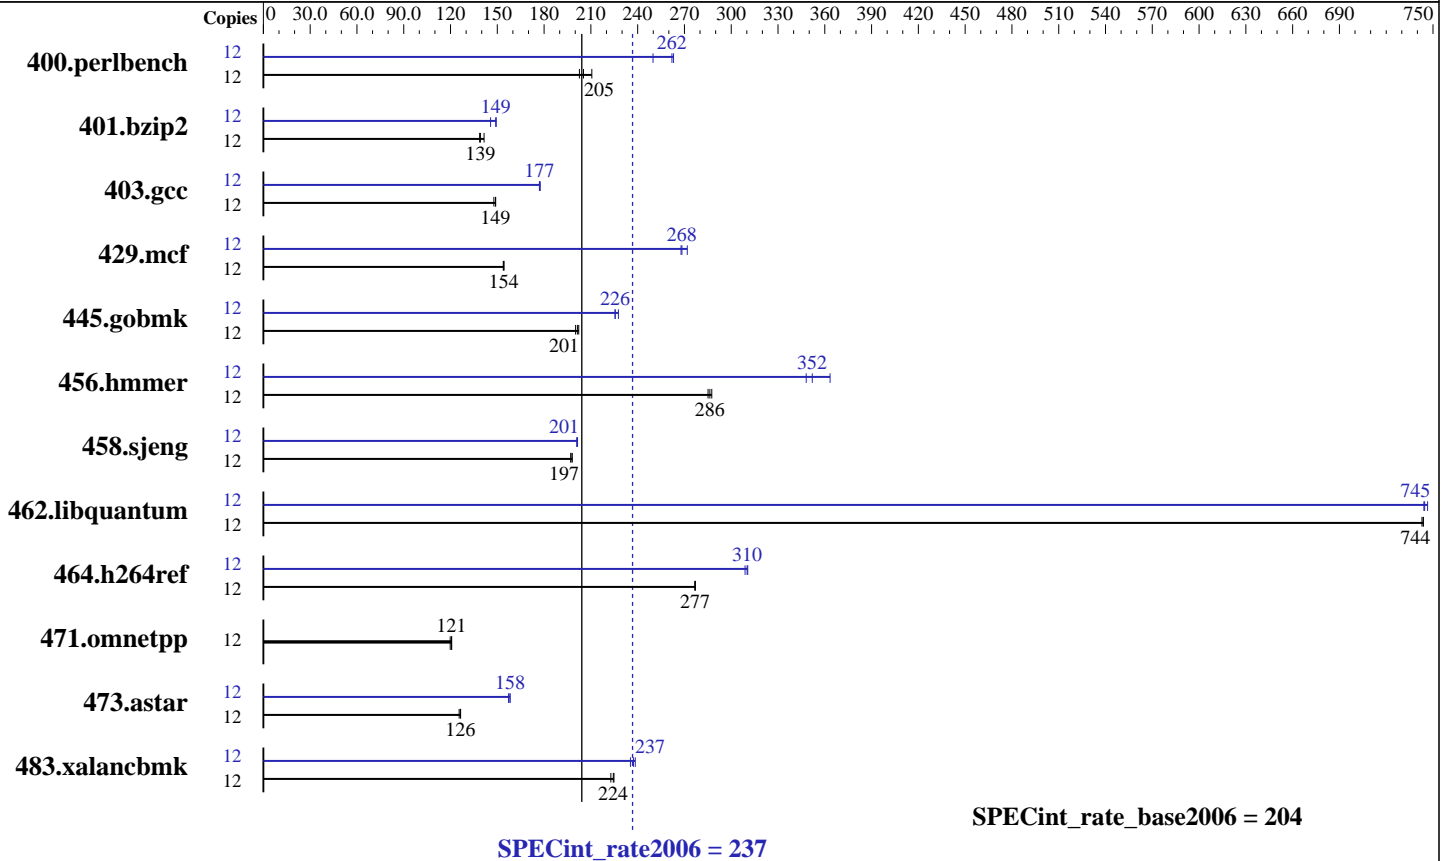

### Hardware

CPU Name: AMD Opteron 4184  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multiuser)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECint\_rate2006 = 237

ASUS RS500A-X6 (KCNR-D12) server system  
(AMD Opteron 4184, 2.80GHz)

SPECint\_rate\_base2006 = 204

CPU2006 license: 9016

Test date: Dec-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jul-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	557	211	579	203	<u>571</u>	<u>205</u>	12	469	250	<u>447</u>	<u>262</u>	446	263
401.bzip2	12	818	142	835	139	<u>832</u>	<u>139</u>	12	795	146	<u>777</u>	<u>149</u>	775	149
403.gcc	12	<u>649</u>	<u>149</u>	648	149	654	148	12	544	178	546	177	<u>546</u>	<u>177</u>
429.mcf	12	710	154	<u>710</u>	<u>154</u>	712	154	12	<u>408</u>	<u>268</u>	409	268	403	272
445.gobmk	12	622	202	629	200	<u>625</u>	<u>201</u>	12	553	228	<u>558</u>	<u>226</u>	558	225
456.hammer	12	389	288	<u>391</u>	<u>286</u>	393	285	12	<u>318</u>	<u>352</u>	308	363	322	348
458.sjeng	12	<u>736</u>	<u>197</u>	737	197	733	198	12	<u>722</u>	<u>201</u>	721	201	723	201
462.libquantum	12	<u>334</u>	<u>744</u>	335	743	334	744	12	333	747	334	744	<u>334</u>	<u>745</u>
464.h264ref	12	<u>959</u>	<u>277</u>	959	277	960	277	12	860	309	855	311	<u>856</u>	<u>310</u>
471.omnetpp	12	621	121	<u>622</u>	<u>121</u>	626	120	12	621	121	<u>622</u>	<u>121</u>	626	120
473.astar	12	<u>667</u>	<u>126</u>	666	126	671	126	12	536	157	<u>533</u>	<u>158</u>	533	158
483.xalancbmk	12	372	223	368	225	<u>369</u>	<u>224</u>	12	352	235	347	238	<u>349</u>	<u>237</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
opencc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 237**

ASUS RS500A-X6 (KCNR-D12) server system  
(AMD Opteron 4184, 2.80GHz)

**SPECint\_rate\_base2006 = 204**

**CPU2006 license:** 9016

**Test date:** Dec-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Dec-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -mso -Ofast -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on  
-CG:cmp\_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 237**

ASUS RS500A-X6 (KCNR-D12) server system  
(AMD Opteron 4184, 2.80GHz)

**SPECint\_rate\_base2006 = 204**

**CPU2006 license:** 9016

**Test date:** Dec-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Dec-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2010

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
-CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:alias=disjoint  
-OPT:goto=off -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
-LNO:prefetch\_ahead=10 -CG:cmp\_peep=on -m32  
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on  
-CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -OPT:keep\_ext=on -ipa -IPA:plimit=750  
-IPA:min\_hotness=300 -IPA:pu\_reorder=1 -LNO:prefetch=1  
-LNO:ignore\_feedback=off -CG:p2align=on  
-CG:unroll\_fb\_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=0  
-OPT:alias=disjoint -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-CG:local\_sched\_alg=1 -CG:cflow=0  
-CG:push\_pop\_int\_saved\_regs=off -CG:cmp\_peep=on  
-HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -CG:ptr\_load\_use=0

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 237**

ASUS RS500A-X6 (KCNr-D12) server system  
(AMD Opteron 4184, 2.80GHz)

**SPECint\_rate\_base2006 = 204**

**CPU2006 license:** 9016

**Test date:** Dec-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Dec-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2010

## Peak Optimization Flags (Continued)

458.sjeng (continued):

-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum:

-march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref:

-march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar:

-march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bdt=2m:heap=2m

483.xalancbmk:

-march=barcelona -mso -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 15:17:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 February 2011.