



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]2006 = 37.5

BL265 (Intel Xeon E5507, 2.26 GHz)

SPECfp_base2006 = 36.6

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2011

Hardware Availability: Mar-2010

Software Availability: Jan-2011

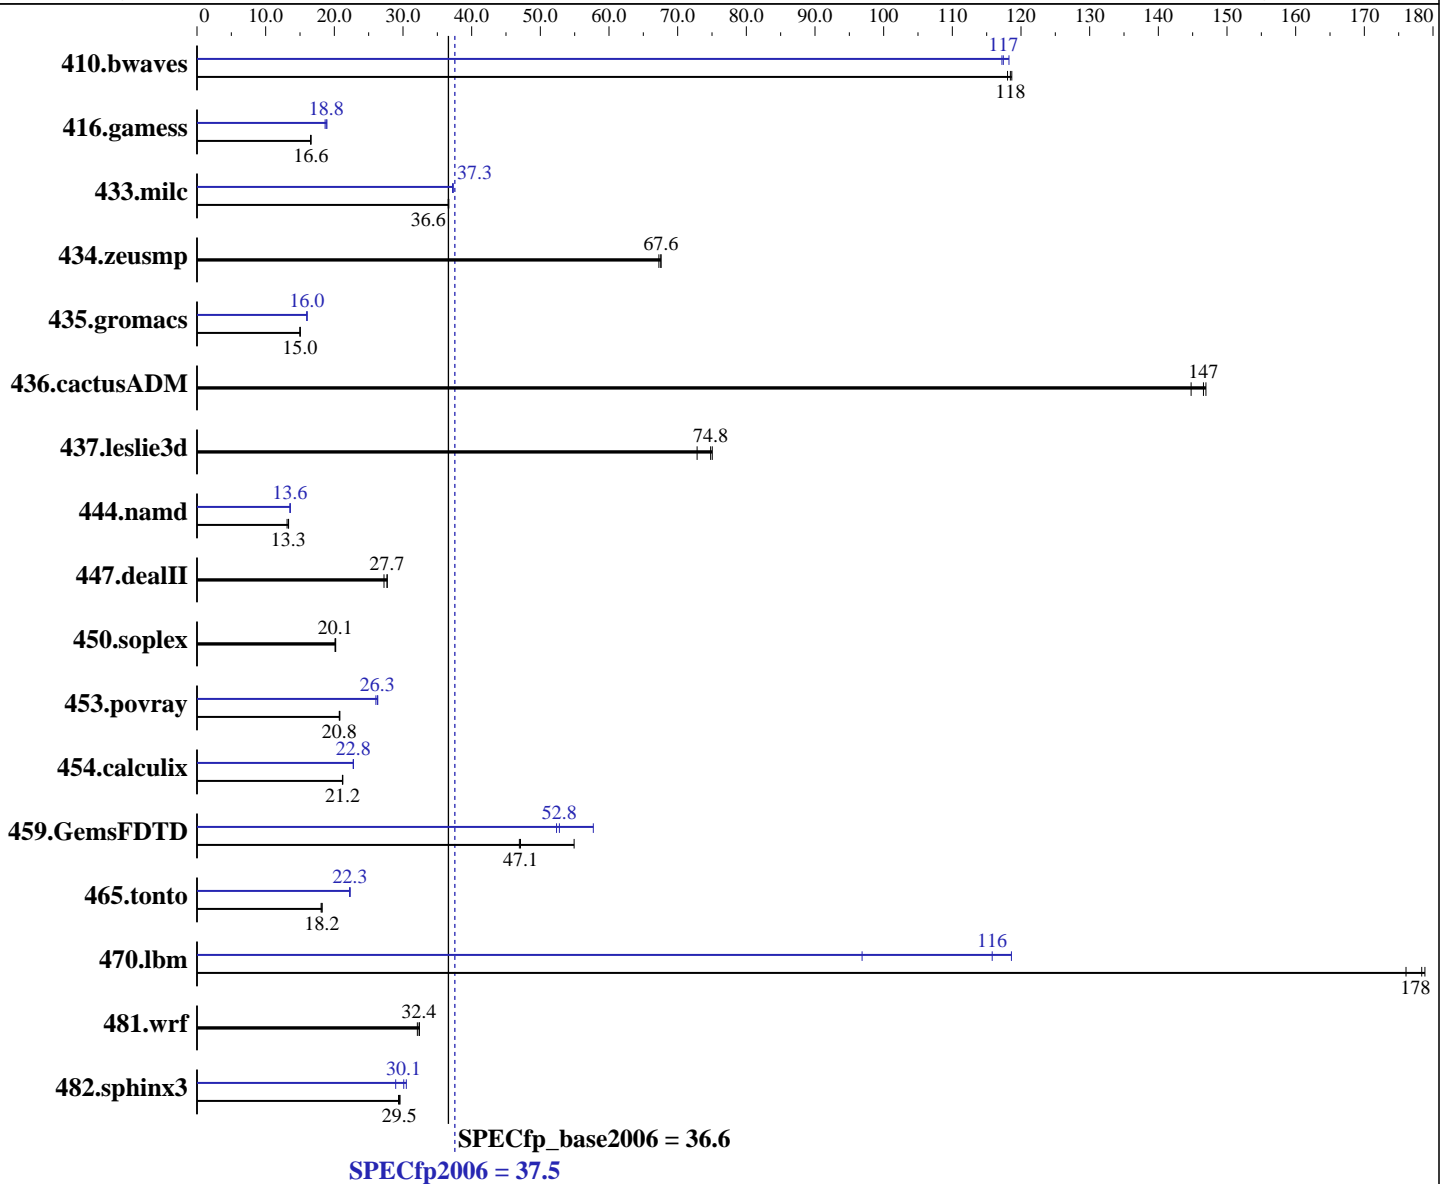

Hardware

CPU Name: Intel Xeon E5507
 CPU Characteristics:
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = **37.5**

BL265 (Intel Xeon E5507, 2.26 GHz)

SPECfp_base2006 = **36.6**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2011

Hardware Availability: Mar-2010

Software Availability: Jan-2011

L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
 Disk Subsystem: 2 x 50 GB SATA, SSD
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	115	118	115	119	115	118	115	118	116	117	116	117
416.gamess	1180	16.6	1180	16.6	1184	16.5	1050	18.7	1040	18.8	1035	18.9
433.milc	251	36.6	250	36.7	251	36.6	247	37.2	246	37.3	246	37.3
434.zeusmp	135	67.3	135	67.6	135	67.6	135	67.3	135	67.6	135	67.6
435.gromacs	475	15.0	476	15.0	475	15.0	446	16.0	445	16.0	446	16.0
436.cactusADM	82.5	145	81.3	147	81.5	147	82.5	145	81.3	147	81.5	147
437.leslie3d	126	74.8	125	75.0	129	72.8	126	74.8	125	75.0	129	72.8
444.namd	601	13.3	602	13.3	611	13.1	591	13.6	591	13.6	591	13.6
447.dealII	413	27.7	413	27.7	420	27.2	413	27.7	413	27.7	420	27.2
450.soplex	413	20.2	414	20.1	415	20.1	413	20.2	414	20.1	415	20.1
453.povray	256	20.8	256	20.8	257	20.7	204	26.1	203	26.3	202	26.3
454.calculix	389	21.2	389	21.2	390	21.2	362	22.8	362	22.8	362	22.8
459.GemsFDTD	225	47.1	226	46.9	193	54.9	203	52.4	184	57.7	201	52.8
465.tonto	541	18.2	544	18.1	540	18.2	442	22.3	441	22.3	443	22.2
470.lbm	77.0	178	76.8	179	78.0	176	119	116	142	96.9	116	119
481.wrf	345	32.4	348	32.1	345	32.4	345	32.4	348	32.1	345	32.4
482.sphinx3	659	29.6	661	29.5	664	29.3	647	30.1	674	28.9	639	30.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was enabled with the following:

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Power C-states enabled in BIOS
Demand Scrub disabled in BIOS



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.5

BL265 (Intel Xeon E5507, 2.26 GHz)

SPECfp_base2006 = 36.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2011
Hardware Availability: Mar-2010
Software Availability: Jan-2011

General Notes

OMP_NUM_THREADS set to number of cores

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.5

BL265 (Intel Xeon E5507, 2.26 GHz)

SPECfp_base2006 = 36.6

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2011

Hardware Availability: Mar-2010

Software Availability: Jan-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -parallel
-ansi-alias -static -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.5

BL265 (Intel Xeon E5507, 2.26 GHz)

SPECfp_base2006 = 36.6

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2011

Hardware Availability: Mar-2010

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.5

BL265 (Intel Xeon E5507, 2.26 GHz)

SPECfp_base2006 = 36.6

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2011

Hardware Availability: Mar-2010

Software Availability: Jan-2011

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:37:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2011.