



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp®2006 = 48.6**

**Huawei E9000 CH121 (Intel Xeon E5-2603)**

**SPECfp\_base2006 = 47.0**

**CPU2006 license:** 3175


**Test date:** Oct-2012

**Test sponsor:** Huawei

**Hardware Availability:** Aug-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

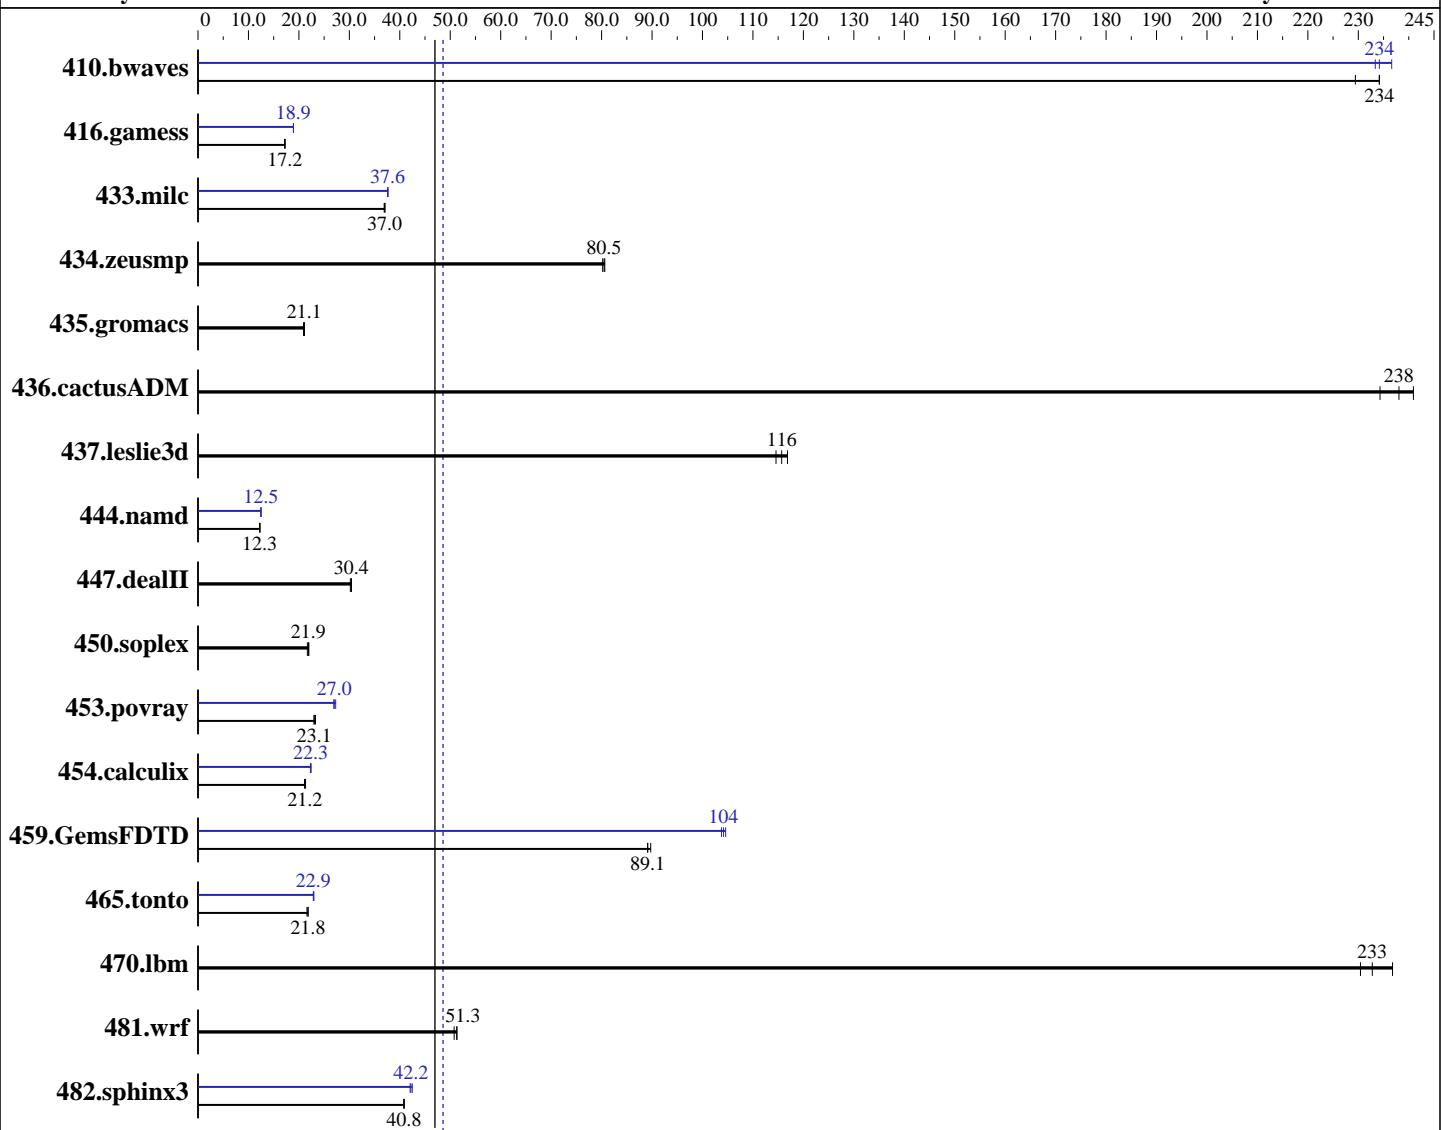

## Hardware

CPU Name: Intel Xeon E5-2603  
CPU Characteristics:  
CPU MHz: 1800  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
Auto Parallel: C/C++: Version 12.1.4 of Intel C++ Studio XE for Linux;  
File System: Fortran: Version 12.1.4 of Intel Fortran Studio XE for Linux  
ext3

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp2006 = 48.6**

**Huawei E9000 CH121 (Intel Xeon E5-2603)**

**SPECfp\_base2006 = 47.0**

**CPU2006 license:** 3175

**Test date:** Oct-2012

**Test sponsor:** Huawei

**Hardware Availability:** Aug-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	59.2	229	58.0	234	<b>58.0</b>	<b>234</b>	57.4	237	58.2	233	<b>58.0</b>	<b>234</b>
416.gamess	1135	17.2	<b>1136</b>	<b>17.2</b>	1138	17.2	<b>1034</b>	18.9	<b>1035</b>	<b>18.9</b>	1035	18.9
433.milc	<b>248</b>	<b>37.0</b>	249	36.9	248	37.1	<b>244</b>	37.7	<b>244</b>	<b>37.6</b>	244	37.6
434.zeusmp	<b>113</b>	<b>80.5</b>	113	80.2	113	80.6	<b>113</b>	<b>80.5</b>	113	80.2	113	80.6
435.gromacs	338	21.1	<b>339</b>	<b>21.1</b>	341	20.9	338	21.1	<b>339</b>	<b>21.1</b>	341	20.9
436.cactusADM	51.0	234	49.6	241	<b>50.2</b>	<b>238</b>	51.0	234	49.6	241	<b>50.2</b>	<b>238</b>
437.leslie3d	82.0	115	80.4	117	<b>81.2</b>	<b>116</b>	82.0	115	80.4	117	<b>81.2</b>	<b>116</b>
444.namd	655	12.3	654	12.3	<b>655</b>	<b>12.3</b>	643	12.5	<b>643</b>	<b>12.5</b>	643	12.5
447.dealII	<b>377</b>	<b>30.4</b>	379	30.2	376	30.4	<b>377</b>	<b>30.4</b>	379	30.2	376	30.4
450.soplex	385	21.7	379	22.0	<b>381</b>	<b>21.9</b>	385	21.7	379	22.0	<b>381</b>	<b>21.9</b>
453.povray	228	23.3	231	23.0	<b>231</b>	<b>23.1</b>	195	27.3	<b>197</b>	<b>27.0</b>	198	26.9
454.calculix	387	21.3	391	21.1	<b>389</b>	<b>21.2</b>	368	22.4	370	22.3	<b>370</b>	<b>22.3</b>
459.GemsFDTD	118	89.7	119	89.1	<b>119</b>	<b>89.1</b>	102	104	<b>102</b>	<b>104</b>	101	105
465.tonto	456	21.6	451	21.8	<b>451</b>	<b>21.8</b>	428	23.0	<b>430</b>	<b>22.9</b>	430	22.9
470.lbm	59.6	230	58.0	237	<b>59.0</b>	<b>233</b>	59.6	230	58.0	237	<b>59.0</b>	<b>233</b>
481.wrf	<b>218</b>	<b>51.3</b>	220	50.8	218	51.3	<b>218</b>	<b>51.3</b>	220	50.8	218	51.3
482.sphinx3	<b>477</b>	<b>40.8</b>	478	40.8	476	40.9	<b>462</b>	<b>42.2</b>	<b>459</b>	<b>42.5</b>	463	42.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /opt/spec2006/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on rhel62x64spec1.huawei.com Wed Oct 17 22:20:31 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 48.6**

Huawei E9000 CH121 (Intel Xeon E5-2603)

**SPECfp\_base2006 = 47.0**

**CPU2006 license:** 3175

**Test date:** Oct-2012

**Test sponsor:** Huawei

**Hardware Availability:** Aug-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
    cache size : 10240 KB
```

```
From /proc/meminfo
    MemTotal:       132120564 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux rhel62x64spec1.huawei.com 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9
08:03:13 EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 17 11:29
```

```
SPEC is set to: /opt/spec2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1        ext3  276G  85G  177G  33% /opt
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,0,1"  
LD\_LIBRARY\_PATH = "/opt/spec2006/libs/32:/opt/spec2006/libs/64"  
OMP\_NUM\_THREADS = "8"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 48.6**

Huawei E9000 CH121 (Intel Xeon E5-2603)

**SPECfp\_base2006 = 47.0**

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Dec-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL6.2

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

    -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
    -ansi-alias

C++ benchmarks:

    -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 48.6**

Huawei E9000 CH121 (Intel Xeon E5-2603)

**SPECfp\_base2006 = 47.0**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Oct-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 48.6

Huawei E9000 CH121 (Intel Xeon E5-2603)

SPECfp\_base2006 = 47.0

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revF.20130108.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revF.20130108.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH121 (Intel Xeon E5-2603)

**SPECfp2006 = 48.6**

**SPECfp\_base2006 = 47.0**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Oct-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:59:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 January 2013.