



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6344

SPECfp<sup>®</sup>2006 = 47.8

SPECfp\_base2006 = 40.0

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

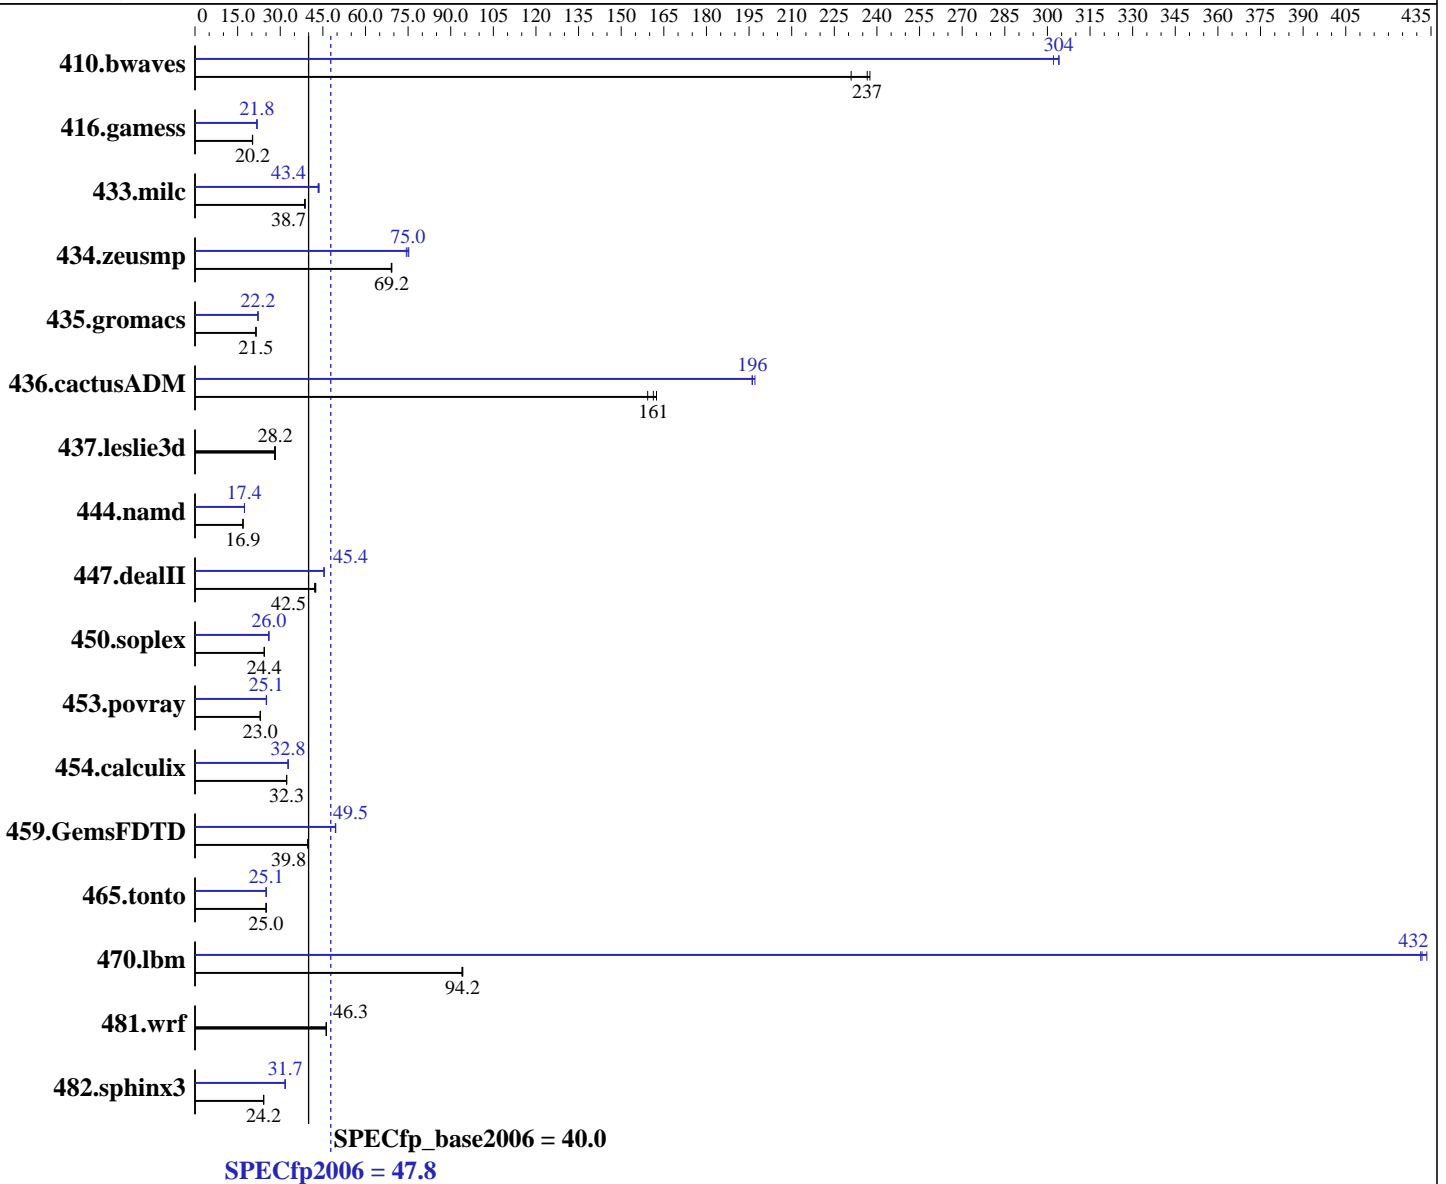

### Hardware

CPU Name: AMD Opteron 6344  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3,  
Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64  
Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6344

SPECfp2006 = 47.8

SPECfp\_base2006 = 40.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

Primary Cache: 384 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores  
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	57.2	238	<b><u>57.4</u></b>	<b><u>237</u></b>	58.9	231	45.0	302	44.7	304	<b><u>44.7</u></b>	<b><u>304</u></b>
416.gamess	969	20.2	965	20.3	<b><u>967</u></b>	<b><u>20.2</u></b>	895	21.9	<b><u>898</u></b>	<b><u>21.8</u></b>	900	21.8
433.milc	238	38.6	<b><u>237</u></b>	<b><u>38.7</u></b>	237	38.8	210	43.7	<b><u>211</u></b>	<b><u>43.4</u></b>	212	43.4
434.zeusmp	132	69.1	<b><u>131</u></b>	<b><u>69.2</u></b>	131	69.2	<b><u>121</u></b>	<b><u>75.0</u></b>	121	75.2	122	74.4
435.gromacs	333	21.4	332	21.5	<b><u>333</u></b>	<b><u>21.5</u></b>	322	22.2	322	22.2	<b><u>322</u></b>	<b><u>22.2</u></b>
436.cactusADM	73.6	162	<b><u>74.1</u></b>	<b><u>161</u></b>	75.0	159	60.6	197	<b><u>60.9</u></b>	<b><u>196</u></b>	60.9	196
437.leslie3d	<b><u>333</u></b>	<b><u>28.2</u></b>	333	28.3	336	28.0	<b><u>333</u></b>	<b><u>28.2</u></b>	333	28.3	336	28.0
444.namd	475	16.9	474	16.9	<b><u>475</u></b>	<b><u>16.9</u></b>	460	17.4	461	17.4	<b><u>460</u></b>	<b><u>17.4</u></b>
447.dealII	<b><u>269</u></b>	<b><u>42.5</u></b>	272	42.1	269	42.5	252	45.5	252	45.4	<b><u>252</u></b>	<b><u>45.4</u></b>
450.soplex	342	24.4	<b><u>342</u></b>	<b><u>24.4</u></b>	342	24.4	321	26.0	<b><u>321</u></b>	<b><u>26.0</u></b>	322	25.9
453.povray	231	23.0	<b><u>232</u></b>	<b><u>23.0</u></b>	232	22.9	<b><u>212</u></b>	<b><u>25.1</u></b>	212	25.1	211	25.2
454.calculix	256	32.3	256	32.2	<b><u>256</u></b>	<b><u>32.3</u></b>	252	32.8	<b><u>252</u></b>	<b><u>32.8</u></b>	252	32.8
459.GemsFDTD	267	39.7	266	39.8	<b><u>267</u></b>	<b><u>39.8</u></b>	214	49.5	<b><u>214</u></b>	<b><u>49.5</u></b>	215	49.4
465.tonto	393	25.0	<b><u>393</u></b>	<b><u>25.0</u></b>	393	25.0	<b><u>393</u></b>	<b><u>25.1</u></b>	393	25.0	392	25.1
470.lbm	<b><u>146</u></b>	<b><u>94.2</u></b>	146	94.3	146	93.9	<b><u>31.8</u></b>	<b><u>432</u></b>	31.7	434	31.9	431
481.wrf	<b><u>242</u></b>	<b><u>46.3</u></b>	242	46.1	241	46.3	<b><u>242</u></b>	<b><u>46.3</u></b>	242	46.1	241	46.3
482.sphinx3	807	24.1	<b><u>806</u></b>	<b><u>24.2</u></b>	806	24.2	614	31.7	<b><u>614</u></b>	<b><u>31.7</u></b>	615	31.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6344

SPECfp2006 = 47.8

SPECfp\_base2006 = 40.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Operating System Notes (Continued)

cpuspeed stop was used to set the CPU frequency to its maximum.

```
Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "4000"
```

```
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"
```

```
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23"
```

```
O64_OMP_SPIN_COUNT = "800000"
```

```
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
```

```
416.gamess: -DSPEC_CPU_LP64
```

```
433.milc: -DSPEC_CPU_LP64
```

```
434.zeusmp: -DSPEC_CPU_LP64
```

```
435.gromacs: -DSPEC_CPU_LP64
```

```
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
```

```
437.leslie3d: -DSPEC_CPU_LP64
```

```
444.namd: -DSPEC_CPU_LP64
```

```
447.dealII: -DSPEC_CPU_LP64
```

```
450.soplex: -DSPEC_CPU_LP64
```

```
453.povray: -DSPEC_CPU_LP64
```

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6344

SPECfp2006 = 47.8

SPECfp\_base2006 = 40.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Base Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
           -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso  
 -OPT:alias=restricted -OPT:malloc\_alg=2 -LNO:parallel\_overhead=10000

### C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -CG:p2align=0  
 -INLINE:aggressive=on -HP:bdt=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

### Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:fusion\_peeling\_limit=0  
 -LNO:parallel\_overhead=10000 -OPT:rsqrt=2 -OPT:unroll\_size=256  
 -HP:bdt=2m:heap=2m -apo

### Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso  
 -OPT:alias=restricted -OPT:malloc\_alg=2 -LNO:parallel\_overhead=10000  
 -LNO:blocking=off -LNO:fusion\_peeling\_limit=0 -OPT:rsqrt=2  
 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6344

SPECfp2006 = 47.8

SPECfp\_base2006 = 40.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive

470.lbm: -march=bdver1 -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -CG:use_incdec=off
-INLINE:aggressive=on -WOPT:sib=on -HP

```

### C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=bdver1 -Ofast -LNO:simd=0 -D__OPEN64_FAST_SET
-static -INLINE:aggressive=on -OPT:alias=disjoint
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6344

SPECfp2006 = 47.8

SPECfp\_base2006 = 40.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
-m32 -HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-INLINE:aggressive=on -HP:bdt=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

### Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -OPT:Ofast  
-OPT:treeheight=on -LNO:blocking=off -LNO:prefetch=2  
-LNO:pf2=0 -LNO:prefetch\_ahead=3 -LNO:ignore\_feedback=off  
-LNO:fu=4 -LNO:loop\_model\_simd=on  
-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -CG:cmp\_peep=on -CG:p2align=0

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -apo -LNO:blocking=off  
-LNO:interchange=off -LNO:fusion\_peeling\_limit=0  
-OPT:treeheight=on -OPT:unroll\_size=256 -CG:cmp\_peep=on  
-CG:compute\_to=on -GRA:prioritize\_by\_density=on  
-HP:bdt=2m:heap=2m

437.leslie3d: basepeak = yes

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2  
-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP -apo

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -CG:local\_sched\_alg=1  
-IPA:plimit=525 -HP

### Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6344

SPECfp2006 = 47.8

SPECfp\_base2006 = 40.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP:bdt=2m:heap=2m -CG:locs\_shallow\_depth=1  
-CG:load\_exe=0 -WOPT:sib=on -apo

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:57:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 January 2013.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7