



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7142G-T4 (BHQGE,  
Opteron 6308)  
AMD Opteron 6308

**SPECfp<sup>®</sup>\_rate2006 = 365**

**SPECfp\_rate\_base2006 = 337**

**CPU2006 license:** 001176


**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

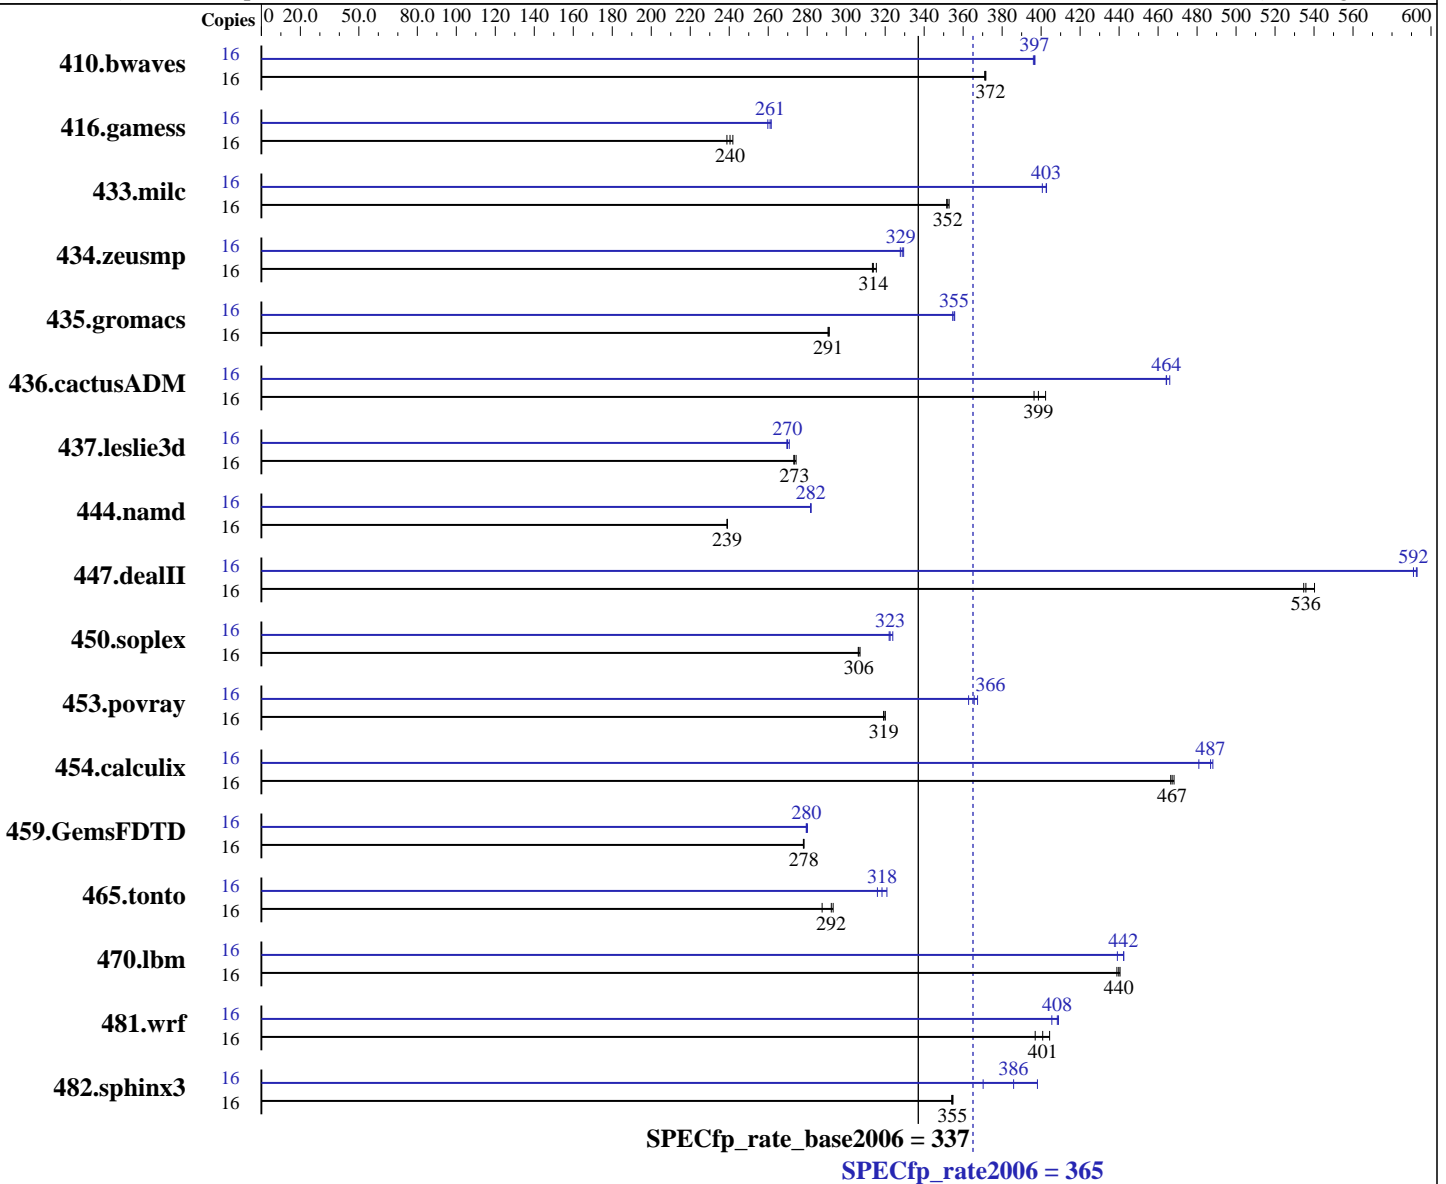

### Hardware

CPU Name: AMD Opteron 6308  
 CPU Characteristics:  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64  
 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7142G-T4 (BHQGE,  
Opteron 6308)  
AMD Opteron 6308

SPECfp\_rate2006 = 365

SPECfp\_rate\_base2006 = 337

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 128 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores  
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 2 cores  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<u>585</u>	<u>372</u>	585	372	586	371	16	548	397	549	396	<u>548</u>	<u>397</u>
416.gamess	16	<u>1303</u>	<u>240</u>	1295	242	1312	239	16	1198	262	<u>1200</u>	<u>261</u>	1206	260
433.milc	16	416	353	<u>417</u>	<u>352</u>	418	352	16	365	403	367	401	<u>365</u>	<u>403</u>
434.zeusmp	16	462	315	<u>464</u>	<u>314</u>	464	313	16	444	328	442	329	<u>443</u>	<u>329</u>
435.gromacs	16	<u>393</u>	<u>291</u>	393	291	392	291	16	321	356	<u>321</u>	<u>355</u>	322	355
436.cactusADM	16	475	402	<u>480</u>	<u>399</u>	482	396	16	412	464	410	466	<u>412</u>	<u>464</u>
437.leslie3d	16	551	273	<u>550</u>	<u>273</u>	548	274	16	558	270	555	271	<u>557</u>	<u>270</u>
444.namd	16	<u>537</u>	<u>239</u>	537	239	537	239	16	<u>455</u>	<u>282</u>	455	282	455	282
447.dealII	16	339	540	342	535	<u>342</u>	<u>536</u>	16	<u>309</u>	<u>592</u>	310	591	309	593
450.soplex	16	435	307	436	306	<u>435</u>	<u>306</u>	16	414	322	412	324	<u>414</u>	<u>323</u>
453.povray	16	<u>267</u>	<u>319</u>	267	319	266	320	16	<u>233</u>	<u>366</u>	235	363	232	367
454.calculix	16	282	468	283	466	<u>283</u>	<u>467</u>	16	<u>271</u>	<u>487</u>	270	488	274	481
459.GemsFDTD	16	611	278	610	278	<u>610</u>	<u>278</u>	16	607	279	606	280	<u>607</u>	<u>280</u>
465.tonto	16	547	288	<u>539</u>	<u>292</u>	537	293	16	498	316	491	321	<u>495</u>	<u>318</u>
470.lbm	16	<u>500</u>	<u>440</u>	501	439	499	440	16	501	439	497	442	<u>497</u>	<u>442</u>
481.wrf	16	<u>446</u>	<u>401</u>	450	397	442	404	16	441	405	<u>438</u>	<u>408</u>	437	409
482.sphinx3	16	879	355	881	354	<u>880</u>	<u>355</u>	16	783	398	<u>808</u>	<u>386</u>	842	370

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7142G-T4 (BHQGE,  
Opteron 6308)  
AMD Opteron 6308

SPECfp\_rate2006 = 365

SPECfp\_rate\_base2006 = 337

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Oct-2012  
**Hardware Availability:** Nov-2012  
**Software Availability:** Aug-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7142G-T4 (BHQGE,  
Opteron 6308)  
AMD Opteron 6308

SPECfp\_rate2006 = 365

SPECfp\_rate\_base2006 = 337

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7142G-T4 (BHQGE,  
Opteron 6308)  
AMD Opteron 6308

SPECfp\_rate2006 = 365

SPECfp\_rate\_base2006 = 337

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
 -fno-second-underscore

## Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs\_best=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=7000 -IPA:callee\_limit=1200  
 -OPT:struct\_array\_copy=2 -OPT:alias=field\_sensitive -mso  
 -march=bdver1

470.lbm: -Ofast -CG:cmp\_peep=on -OPT:keep\_ext=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=8000 -IPA:small\_pu=100 -march=bdver1 -mso

482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -m32 -IPA:plimit=1000 -OPT:malloc\_alg=2 -CG:cmp\_peep=on  
 -CG:p2align=0 -CG:load\_exe=1 -CG:dsched=on  
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch\_ahead=4  
 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore\_feedback=off  
 -CG:local\_sched\_alg=0 -CG:load\_exe=0 -OPT:unroll\_size=256  
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if\_select\_conv=1  
 -OPT:alias=disjoint -LNO:psimd\_iso\_unroll=ON -march=bdver1

447.dealIII: -Ofast -D\_\_OPEN64\_FAST\_SET -static -INLINE:aggressive=on  
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
 -CG:cmp\_peep=on -CG:movext\_icmp=off -TENV:frame\_pointer=off  
 -march=bdver1

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:ignore\_feedback=off -INLINE:aggressive=on -OPT:RO=1  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7142G-T4 (BHQGE,  
Opteron 6308)  
AMD Opteron 6308

SPECfp\_rate2006 = 365

SPECfp\_rate\_base2006 = 337

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on

-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m

-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0

-march=bdver2

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off

-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on

-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0

-HP:bd=2m:heap=2m -CG:cmp\_peep=on -march=bdver1

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3

-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

-WOPT:sib=on -march=bdver1

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500

-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2

-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024

-OPT:unroll\_times\_max=16 -LNO:fission=2

-CG:local\_sched\_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off

-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525

-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m

-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on

-march=bdver1 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0

-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1

-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint

-GRA:optimize\_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m

-march=bdver1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7142G-T4 (BHQGE,  
Opteron 6308)  
AMD Opteron 6308

SPECfp\_rate2006 = 365

SPECfp\_rate\_base2006 = 337

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

## Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:25:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.