



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6380)  
AMD Opteron 6380)

SPECint®\_rate2006 = 542

SPECint\_rate\_base2006 = 480

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

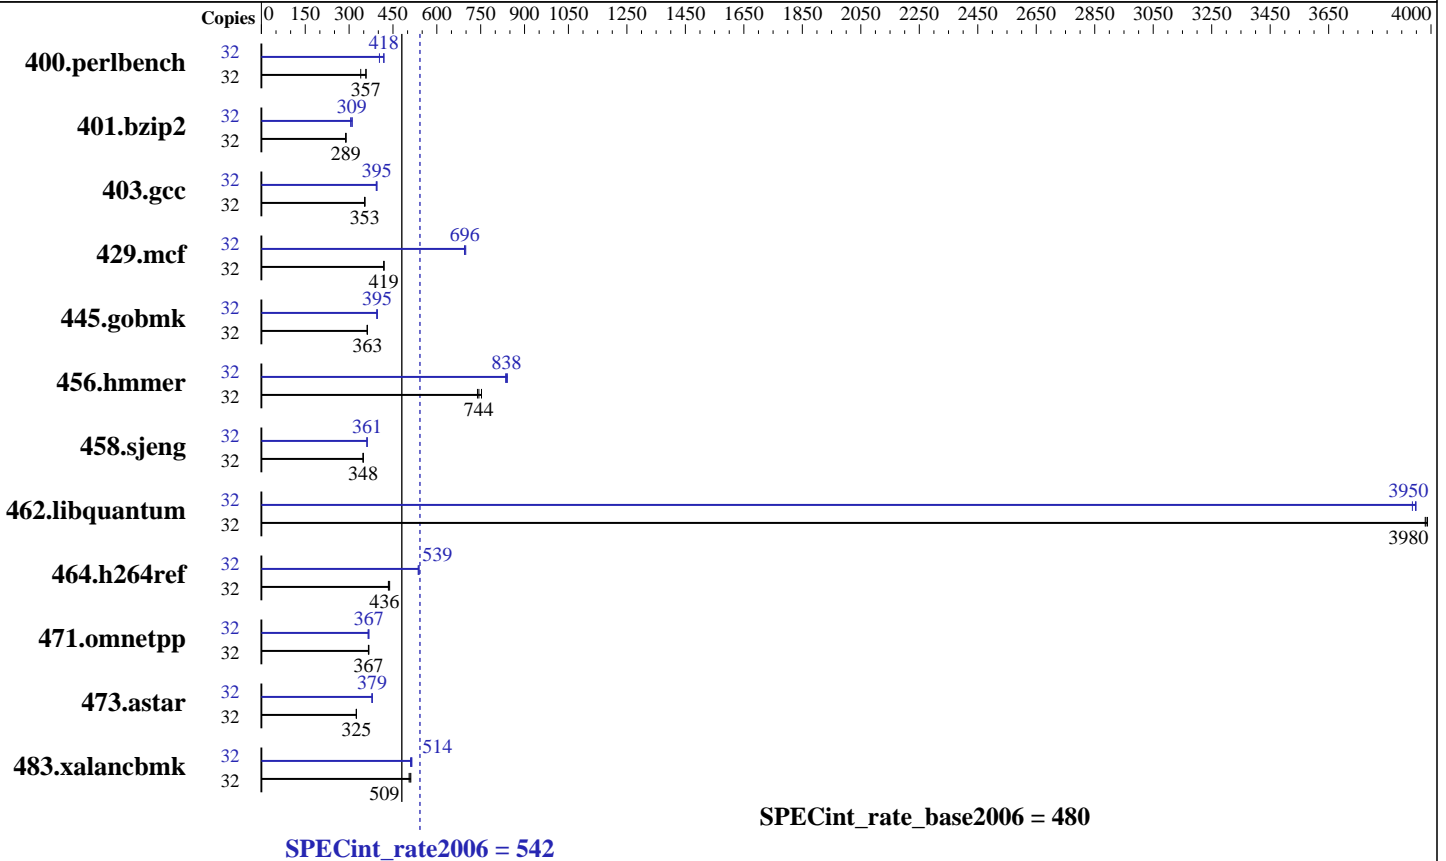

### Hardware

CPU Name: AMD Opteron 6380  
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite  
(from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6380)  
AMD Opteron 6380)

SPECint\_rate2006 = 542

SPECint\_rate\_base2006 = 480

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	32	872	358	920	340	<b>876</b>	<b>357</b>	32	774	404	745	419	<b>748</b>	<b>418</b>		
401.bzip2	32	1072	288	<b>1069</b>	<b>289</b>	1066	290	32	1012	305	993	311	<b>999</b>	<b>309</b>		
403.gcc	32	730	353	<b>729</b>	<b>353</b>	726	355	32	656	393	652	395	<b>652</b>	<b>395</b>		
429.mcf	32	696	419	<b>696</b>	<b>419</b>	697	419	32	420	695	<b>419</b>	<b>696</b>	418	699		
445.gobmk	32	925	363	<b>926</b>	<b>363</b>	929	361	32	846	397	850	395	<b>849</b>	<b>395</b>		
456.hammer	32	<b>401</b>	<b>744</b>	404	739	397	753	32	357	835	355	841	<b>356</b>	<b>838</b>		
458.sjeng	32	1113	348	<b>1112</b>	<b>348</b>	1111	349	32	1072	361	<b>1071</b>	<b>361</b>	1071	362		
462.libquantum	32	166	3990	167	3980	<b>166</b>	<b>3980</b>	32	168	3950	<b>168</b>	<b>3950</b>	168	3940		
464.h264ref	32	<b>1624</b>	<b>436</b>	1630	434	1614	439	32	<b>1314</b>	<b>539</b>	1314	539	1321	536		
471.omnetpp	32	<b>545</b>	<b>367</b>	546	366	544	368	32	548	365	544	368	<b>545</b>	<b>367</b>		
473.astar	32	693	324	691	325	<b>691</b>	<b>325</b>	32	594	378	<b>593</b>	<b>379</b>	593	379		
483.xalancbmk	32	432	511	437	505	<b>434</b>	<b>509</b>	32	429	515	433	510	<b>430</b>	<b>514</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6380)  
AMD Opteron 6380)

SPECint\_rate2006 = 542

SPECint\_rate\_base2006 = 480

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Oct-2012  
**Hardware Availability:** Nov-2012  
**Software Availability:** Aug-2012

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1

C++ benchmarks:  
-Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on -D\_\_OPEN64\_FAST\_SET  
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT, Opteron 6380)  
AMD Opteron 6380)

SPECint\_rate2006 = 542

SPECint\_rate\_base2006 = 480

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -WOPT:sib=on -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -CG:movext\_icmp=off -HP:bd=2m:heap=2m -march=bdver1  
 -GRA:aggr\_loop\_splitting=off -GRA:loop\_splitting=off

401.bzip2: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m  
 -march=bdver2

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:trip\_count=256 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2  
 -m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll\_times\_max=5 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -CG:dsched=on -GRA:prioritize\_by\_density=on  
 -m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -OPT:unroll\_size=256 -OPT:unroll\_times\_max=8  
 -OPT:keep\_ext=on -IPA:plimit=750 -IPA:min\_hotness=300  
 -IPA:pu\_reorder=1 -LNO:ignore\_feedback=off -WOPT:if\_conv=2  
 -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:prefetch=2 -OPT:alias=disjoint  
 -OPT:unroll\_times\_max=16 -OPT:unroll\_size=512  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -CG:cflow=0  
 -CG:cmp\_peep=on -CG:pre\_local\_sched=off -HP:bd=2m:heap=2m  
 -CG:p2align=0 -CG:load\_exe=3 -CG:dsched=on -march=bdver1

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6380)  
AMD Opteron 6380)

**SPECint\_rate2006 = 542**

**SPECint\_rate\_base2006 = 480**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

## Peak Optimization Flags (Continued)

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:ptr\_load\_use=0 -CG:divrem\_opt=on -CG:movext\_icmp=off  
-CG:locs\_best=on -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll\_size=512 -OPT:unroll\_times\_max=16  
-LNO:prefetch=2 -LNO:prefetch\_ahead=4 -LNO:pf2=0  
-CG:local\_sched\_alg=1 -CG:p2align=0 -INLINE:aggressive=ON  
-IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bd=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:unroll\_size=256 -OPT:unroll\_times\_max=2  
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-WOPT:sib=on -D\_\_OPEN64\_FAST\_SET -march=bdver2 -mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m  
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions -march=bdver2  
-mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6380)  
AMD Opteron 6380)

**SPECint\_rate2006 = 542**

**SPECint\_rate\_base2006 = 480**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:18:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.