



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon


SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

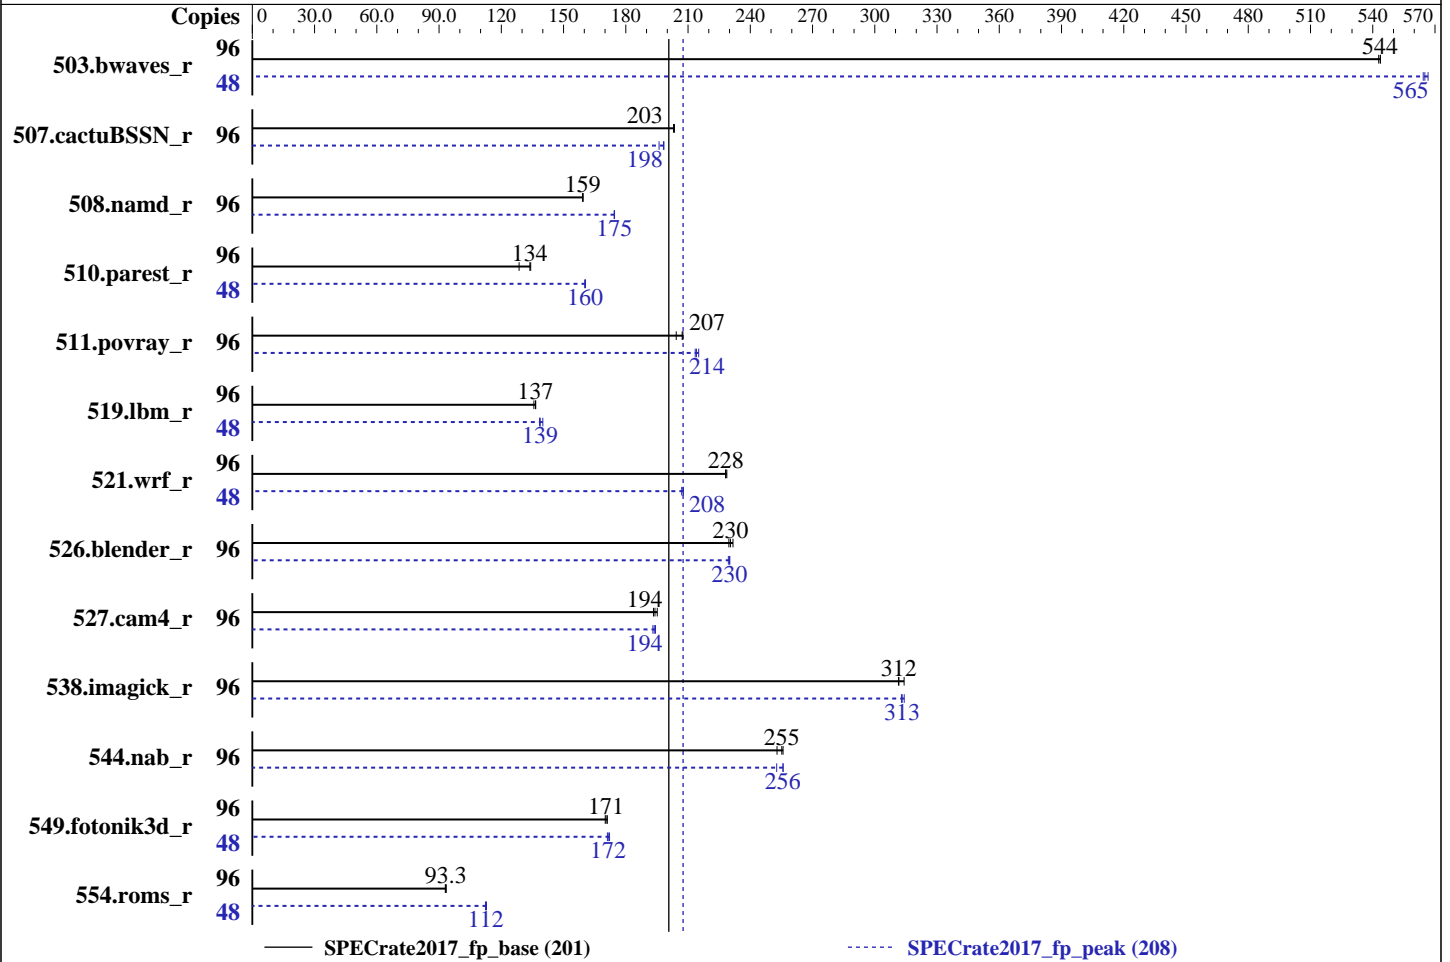

Hardware

CPU Name: AMD EPYC 7401
 Max MHz.: 3000
 Nominal: 2000
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2S2Rx4 PC4-2667V-R, running at 2400)
 Storage: 1 x 2000 GB SATA, 7200 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server 7.4
 kernel 3.10.0-693.2.2
 Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: American Megatrends Inc. BIOS Version 0WYSZ016 released Jul-2017
 File System: ext4
 System State: Run level 3 (Multi User)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1773	543	<u>1771</u>	<u>544</u>	1771	544	48	<u>852</u>	<u>565</u>	853	564	849	567
507.cactuBSSN_r	96	597	203	599	203	598	203	96	613	198	613	198	620	196
508.namd_r	96	572	159	<u>573</u>	<u>159</u>	573	159	96	523	174	522	175	<u>523</u>	<u>175</u>
510.parest_r	96	1872	134	<u>1877</u>	<u>134</u>	1953	129	48	784	160	<u>783</u>	<u>160</u>	782	161
511.povray_r	96	1080	208	1097	204	1082	207	96	1042	215	<u>1047</u>	<u>214</u>	1050	213
519.lbm_r	96	741	137	<u>741</u>	<u>137</u>	746	136	48	361	140	365	138	365	139
521.wrf_r	96	942	228	940	229	943	228	48	518	208	518	208	520	207
526.blender_r	96	637	230	<u>635</u>	<u>230</u>	631	232	96	637	229	<u>636</u>	<u>230</u>	635	230
527.cam4_r	96	860	195	<u>865</u>	<u>194</u>	868	193	96	<u>867</u>	<u>194</u>	870	193	864	194
538.imagick_r	96	767	311	<u>766</u>	<u>312</u>	760	314	96	763	313	760	314	<u>762</u>	<u>313</u>
544.nab_r	96	639	253	<u>633</u>	<u>255</u>	632	256	96	639	253	632	256	632	256
549.fotonik3d_r	96	2200	170	2186	171	2194	171	48	1090	172	1087	172	1093	171
554.roms_r	96	1633	93.4	<u>1635</u>	<u>93.3</u>	1640	93.0	48	679	112	<u>678</u>	<u>112</u>	676	113

SPECrate2017_fp_base = 201

SPECrate2017_fp_peak = 208

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"
MALLOC_CONF = "lg_chunk:28"

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.
lg_chunk: set the virtual memory chunk size (log base 2). For example, lg_chunk:21 sets the default chunk size to 2²¹ = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

Platform Notes

BIOS settings:
Determinism Slider = Power
cTDP Control = Manual
cTDP = 200

This system Sugon A420-G30 is electrically equal with Sugon A620-G30 populated with the same processors and memories.
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost Mon Dec 4 21:44:21 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7401 24-Core Processor
2 "physical id"s (chips)
96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Platform Notes (Continued)

siblings : 48
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):             2
NUMA node(s):         8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                1
Model name:            AMD EPYC 7401 24-Core Processor
Stepping:              2
CPU MHz:               2000.000
CPU max MHz:           2000.0000
CPU min MHz:           1200.0000
BogoMIPS:              3992.01
Virtualization:       AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0-5,48-53
NUMA node1 CPU(s):    6-11,54-59
NUMA node2 CPU(s):    12-17,60-65
NUMA node3 CPU(s):    18-23,66-71
NUMA node4 CPU(s):    24-29,72-77
NUMA node5 CPU(s):    30-35,78-83
NUMA node6 CPU(s):    36-41,84-89
NUMA node7 CPU(s):    42-47,90-95
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc art rep_good nopl nonstop_tsc extd_apicid aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
hw_pstate avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni
xsaveopt xsavec xgetbv1 arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold overflow_recov succor smca
```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 130977 MB
node 0 free: 128015 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 131071 MB
node 1 free: 128058 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 131071 MB
node 2 free: 128153 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 131071 MB
node 3 free: 128147 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 131071 MB
node 4 free: 128201 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 131071 MB
node 5 free: 128200 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 131071 MB
node 6 free: 128195 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 131071 MB
node 7 free: 128194 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 16 16 16 32 32 32 32
 1:  16 10 16 16 32 32 32 32
 2:  16 16 10 16 32 32 32 32
 3:  16 16 16 10 32 32 32 32
 4:  32 32 32 32 10 16 16 16
 5:  32 32 32 32 16 10 16 16
 6:  32 32 32 32 16 16 10 16
 7:  32 32 32 32 16 16 16 10

```

```

From /proc/meminfo
MemTotal: 1056830228 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Platform Notes (Continued)

```
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
```

```
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux localhost 3.10.0-693.2.2.el7.x86_64 #1 SMP Mon Sep 25 08:21:56 EDT 2017 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 1 08:52
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/rhel-home ext4      296G       93G   188G   33% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 0WYSZ016 07/21/2017
Memory:
16x Samsung M393A8K40B22-CWD 32 GB 2 rank 2666, configured at 2400
16x Unknown Unknown
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC      519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
=====
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Compiler Version Notes (Continued)

CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 511.povray_r(base, peak) 526.blender_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 507.cactuBSSN_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Compiler Version Notes (Continued)

peak)

```
-----
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
-----
```

```
=====
CC 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
```

```
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-freemap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-freemap-arrays -inline-threshold=1000 -z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)
-O3(clang) -mavx -madox -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -freemap-arrays -mno-avx2 -inline-threshold=1000
-O3(gfortran) -mavx -madox -funroll-loops -z muldefs
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-freemap-arrays -mno-avx2 -inline-threshold=1000 -finline-aggressive
-z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -freemap-arrays -mno-avx2 -inline-threshold=1000
-finline-aggressive -O3(gfortran) -mavx -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
clang gfortran
```

Benchmarks using both Fortran and C:

```
clang gfortran
```

Benchmarks using both C and C++:

```
clang++ clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang gfortran
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(clang) -mavx  
-ffast-math -O3(gfortran) -funroll-loops  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 201

Sugon A420-G30 (AMD EPYC 7401)

SPECrate2017_fp_peak = 208

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Peak Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -O3 -mavx2 -madox -funroll-loops -ffast-math  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/aoccl100-flags-revC-I.html>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/aoccl100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-04 08:44:20-0500.

Report generated on 2019-02-20 21:10:09 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.