



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

CPU2017 License: 9046


Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

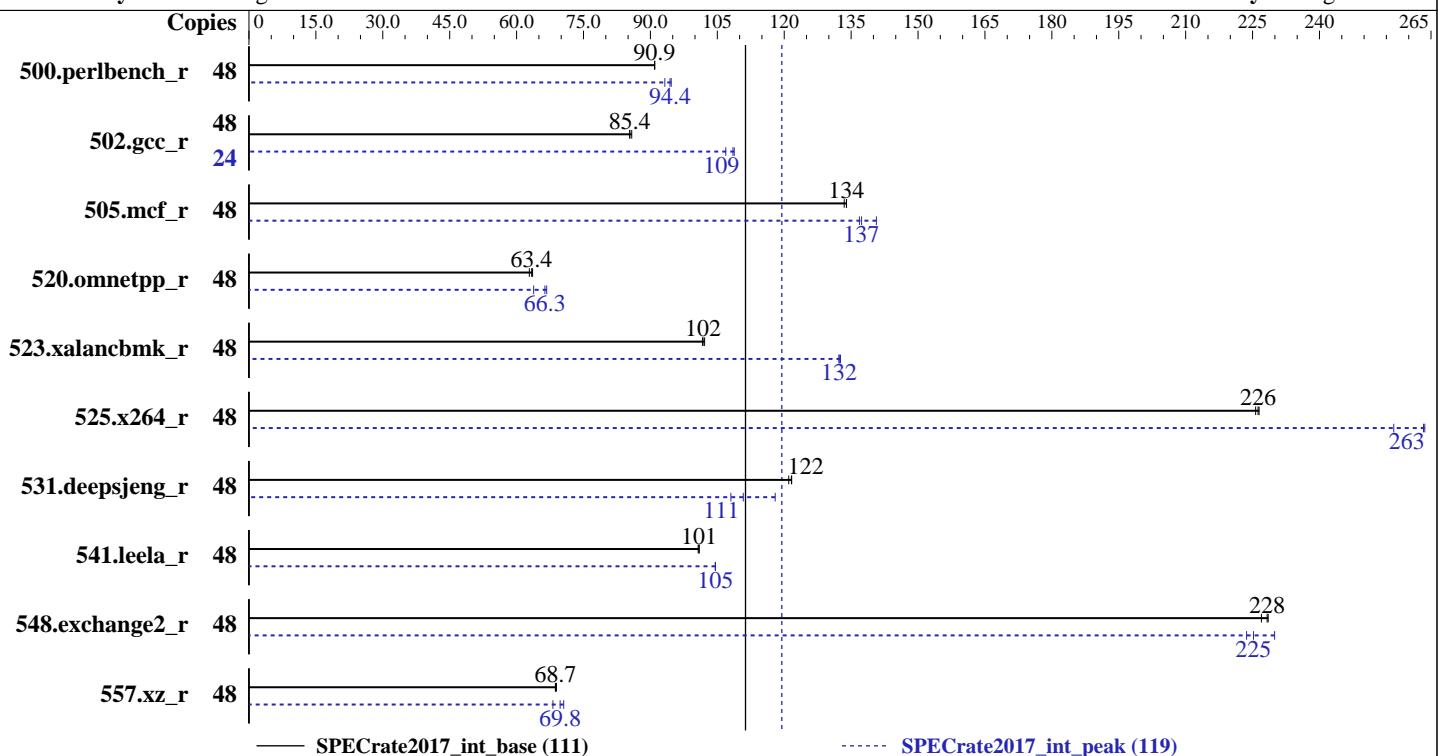

— SPECrate2017_int_base (111)

····· SPECrate2017_int_peak (119)

Hardware

CPU Name: AMD EPYC 7401P
Max MHz.: 3000
Nominal: 2000
Enabled: 24 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores
Other: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2667V-R, running at 2400)
Storage: 1 x 800 GB SATA, SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3
kernel 4.4.73-5-default
Compiler: C/C++: Version 1.0.0 of AOCC
Fortran: Version 4.8.2 of GCC
Parallel: No
Firmware: American Megatrends Inc. BIOS Version 1QLSH012 released Sep-2017
File System: ext4
System State: Run level 3 (Multi User)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	840	91.0	840	90.9	840	90.9	48	820	93.2	810	94.4	807	94.7
502.gcc_r	48	796	85.4	796	85.4	792	85.8	24	312	109	313	109	318	107
505.mcf_r	48	581	133	579	134	579	134	48	551	141	565	137	567	137
520.omnetpp_r	48	990	63.6	994	63.4	1002	62.9	48	949	66.3	943	66.8	987	63.8
523.xalancbmk_r	48	496	102	498	102	499	102	48	383	132	382	133	383	132
525.x264_r	48	372	226	371	226	372	226	48	319	264	319	263	327	257
531.deepsjeng_r	48	452	122	452	122	455	121	48	466	118	509	108	496	111
541.leela_r	48	787	101	789	101	788	101	48	760	105	760	105	760	105
548.exchange2_r	48	551	228	554	227	550	229	48	562	224	547	230	558	225
557.xz_r	48	754	68.7	755	68.7	752	68.9	48	743	69.8	761	68.1	735	70.6

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:  
MALLOC_CONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing
of threads and arenas.

lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to $2^{21} = 2\text{MiB}$.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

Platform Notes

BIOS settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost Sun Dec 10 09:13:01 2017
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7401P 24-Core Processor

1 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

Platform Notes (Continued)

physical 0: cores 0 1 2 3 4 5

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             1
NUMA node(s):          4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7401P 24-Core Processor
Stepping:               2
CPU MHz:               1200.000
CPU max MHz:          2000.0000
CPU min MHz:          1200.0000
BogoMIPS:              3992.25
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0-5,24-29
NUMA node1 CPU(s):    6-11,30-35
NUMA node2 CPU(s):    12-17,36-41
NUMA node3 CPU(s):    18-23,42-47
Flags:     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
          pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
          constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpf eagerfpu pni
         pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
          rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
          osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
          hw_pstate npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
          pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
          clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf overflow_recov succor smca
```

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

SPECCrate2017_int_base = 111

SPECCrate2017_int_peak = 119

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

Platform Notes (Continued)

```
node 0 size: 62511 MB
node 0 free: 62277 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 64507 MB
node 1 free: 64287 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 64507 MB
node 2 free: 64277 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 64506 MB
node 3 free: 64298 MB
node distances:
node    0    1    2    3
  0: 10   16   16   16
  1: 16   10   16   16
  2: 16   16   10   16
  3: 16   16   16   10

From /proc/meminfo
MemTotal:      262176928 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux localhost 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Dec 7 21:30
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	ext4	722G	51G	670G	8%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1QLSH012 09/15/2017

Memory:

8x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400
8x Unknown Unknown

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 502.gcc_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CXXC 523.xalancbmk_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base) 557.xz_r(base, peak)

=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(peak) 525.x264_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 541.leela_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 548.exchange2_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-flio -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:

-flio -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc

Fortran benchmarks:

-flio -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs -Ofast
-fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-finline-threshold=1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017_int_base = 111

SPECrate2017_int_peak = 119

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Peak Optimization Flags (Continued)

502.gcc_r: -m32 -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-L/root/work/lib/jemalloc/lib32 -ljemalloc

505.mcf_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc

523.xalancbmk_r: -m32 -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000
-L/root/work/lib/jemalloc/lib32 -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm
-unroll-count=8 -unroll-threshold=100 -ljemalloc

Fortran benchmarks:

-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2
-madx -funroll-loops -ffast-math -Ofast -fdefault-integer-8
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

Sugon A320-G30
(AMD EPYC 7401P)

SPECCrate2017_int_base = 111

SPECCrate2017_int_peak = 119

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-09 20:13:01-0500.

Report generated on 2019-02-20 21:09:20 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.