CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R520 (3.73 GHz Intel Xeon Processor 5080)

SPECfp_rate2000 = 63.4

SPECfp_rate_base2000 = 63.4

SPEC license #: 97 | Tested by: Acer Incorporated | Test date: May-2006 | Hardware Avail: Nov-2006 | Software Avail: Dec-2005

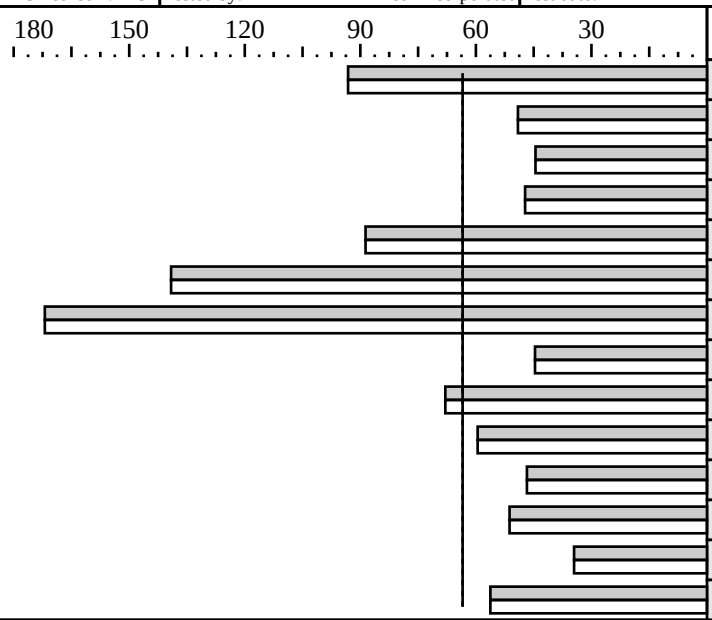

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	79.7	93.2	4	79.7	93.2
171.swim	4	293	49.1	4	293	49.1
172.mgrid	4	188	44.5	4	188	44.5
173.applu	4	206	47.2	4	206	47.2
177.mesa	4	73.3	88.6	4	73.3	88.6
178.galgel	4	96.7	139	4	96.7	139
179.art	4	70.2	172	4	70.2	172
183.equake	4	135	44.6	4	135	44.6
187.facerec	4	130	67.9	4	130	67.9
188.ammp	4	171	59.5	4	171	59.5
189.lucas	4	199	46.7	4	199	46.7
191.fma3d	4	190	51.3	4	190	51.3
200.sixtrack	4	148	34.5	4	148	34.5
301.apsi	4	215	56.2	4	215	56.2

Hardware

CPU:	Intel Xeon Processor 5080 (3.73 GHz, 2x2MB L2, 1066MHz system bus)
CPU MHz:	3733
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12K(I) micro-ops + 16KB(D) on chip, per core
Secondary Cache:	2048KB(I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 2048MB ECC FB-DIMM 667
Disk Subsystem:	1 x 73GB 10000RPM SAS HDD
Other Hardware:	

Software

Operating System:	Red Hat Enterprise Linux 4 Advanced Server Update 3 EM64T (Kernel 2.6.9-34.ELsmp)
Compiler:	Intel C++ Compiler 9.0 Build 20051201 for EM64T Intel Fortran Compiler 9.0 Build 20051201 for EM64T
File System:	ext3
System State:	Runlevel 3

Notes/Tuning Information

```
GENERAL
 ONESTEP=yes for all benchmarks
 +FDO :  PASS1= -prof_gen   PASS2= -prof_use
PORTABILITY FLAGS
 -DSPEC_CPU2000_LP64 applied to all benchmarks
 178.galgel: -FI for fixed-format Fortran
BASE TUNING
 Baseline optimizations for C and Fortran: -fast +FDO
PEAK TUNING
 basepeak=yes set for all benchmarks
Enable hardware prefetching and adjacent cache line prefetch BIOS setting
This result was measured on the Acer Alto R720.
The Altos R520 and Altos R720 are electronically equivalent.
```