



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

**SPECrate2017\_fp\_base = 96.4**

**SPECrate2017\_fp\_peak = 93.9**

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**Test Date:** Mar-2018

**Hardware Availability:** Feb-2018

**Software Availability:** Dec-2017

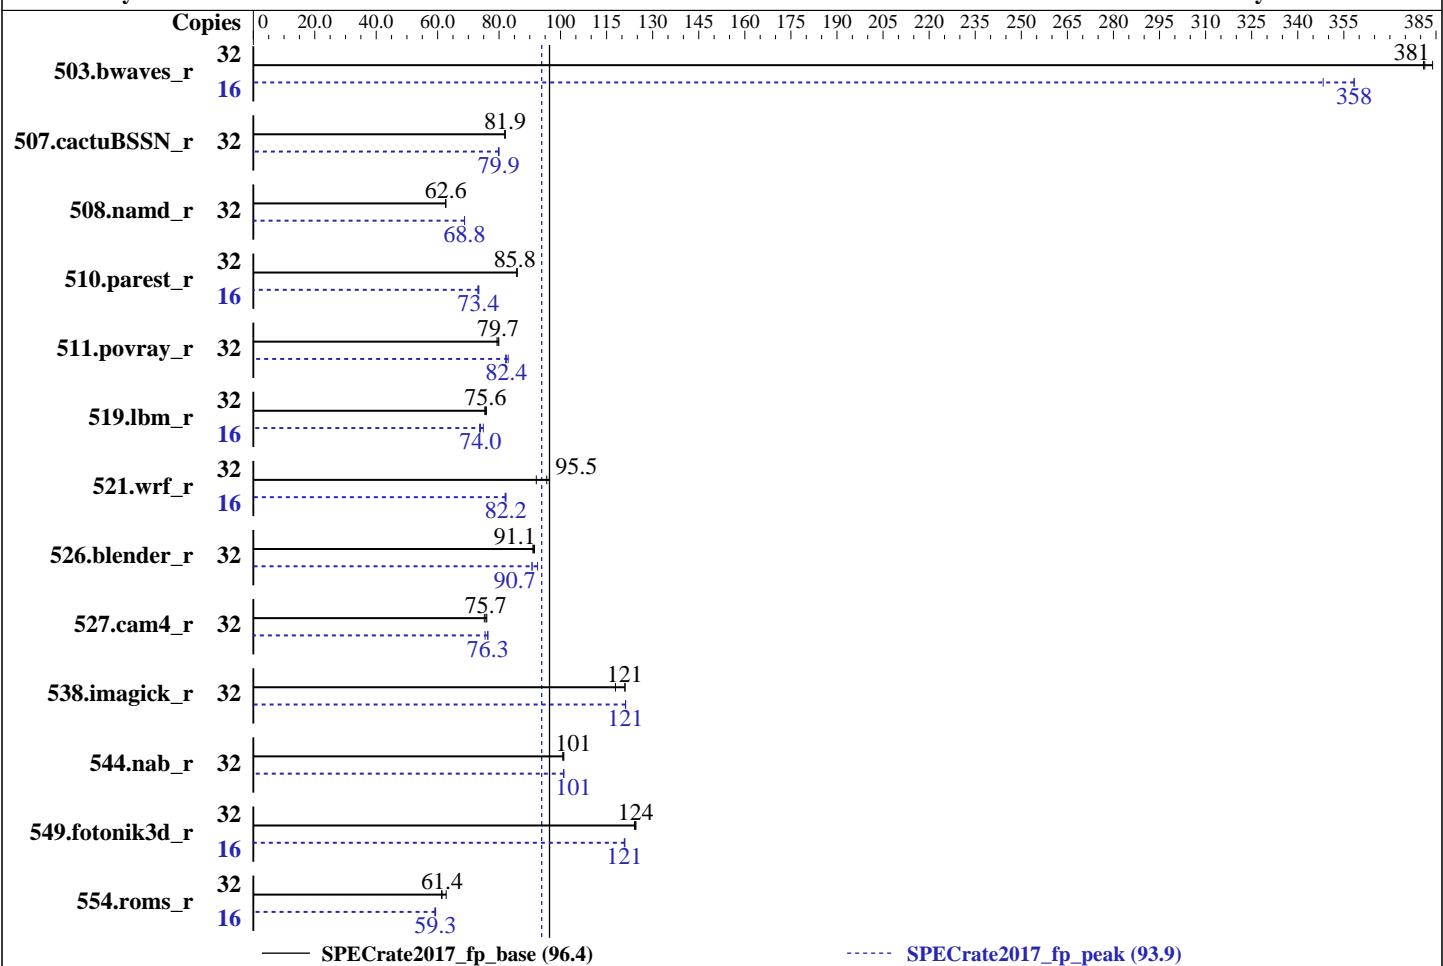

## Hardware

CPU Name: AMD EPYC 7251  
 Max MHz.: 2900  
 Nominal: 2100  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 32 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4DRx4 PC4-2666V-L, running at 2400)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 kernel 4.4.114-94.11-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.0.9 released Jan-2018  
 File System: xfs  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator library, version 4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECrate2017\_fp\_base = 96.4**

**SPECrate2017\_fp\_peak = 93.9**

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Dec-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	836	384	842	381	<b>842</b>	<b>381</b>	16	448	358	<b>448</b>	<b>358</b>	461	348
507.cactuBSSN_r	32	<b>494</b>	<b>81.9</b>	494	82.0	495	81.9	32	507	79.9	507	79.9	<b>507</b>	<b>79.9</b>
508.namd_r	32	<b>485</b>	<b>62.6</b>	485	62.6	486	62.6	32	442	68.7	<b>442</b>	<b>68.8</b>	442	68.8
510.parest_r	32	975	85.9	<b>975</b>	<b>85.8</b>	976	85.8	16	<b>571</b>	<b>73.4</b>	573	73.1	570	73.4
511.povray_r	32	<b>937</b>	<b>79.7</b>	942	79.3	935	79.9	32	910	82.1	901	83.0	<b>907</b>	<b>82.4</b>
519.lbm_r	32	448	75.4	445	75.9	<b>446</b>	<b>75.6</b>	16	225	74.9	<b>228</b>	<b>74.0</b>	229	73.7
521.wrf_r	32	778	92.1	<b>750</b>	<b>95.5</b>	744	96.4	16	<b>436</b>	<b>82.2</b>	437	82.0	436	82.2
526.blender_r	32	532	91.5	535	91.0	<b>535</b>	<b>91.1</b>	32	537	90.7	527	92.5	<b>537</b>	<b>90.7</b>
527.cam4_r	32	744	75.2	<b>739</b>	<b>75.7</b>	736	76.0	32	733	76.4	<b>733</b>	<b>76.3</b>	742	75.4
538.imagick_r	32	675	118	<b>658</b>	<b>121</b>	658	121	32	657	121	657	121	<b>657</b>	<b>121</b>
544.nab_r	32	<b>534</b>	<b>101</b>	533	101	535	101	32	<b>533</b>	<b>101</b>	533	101	533	101
549.fotonik3d_r	32	<b>1002</b>	<b>124</b>	1002	125	1005	124	16	<b>516</b>	<b>121</b>	516	121	<b>516</b>	<b>121</b>
554.roms_r	32	830	61.3	810	62.8	<b>828</b>	<b>61.4</b>	16	430	59.1	<b>429</b>	<b>59.3</b>	429	59.3

**SPECrate2017\_fp\_base = 96.4**

**SPECrate2017\_fp\_peak = 93.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory

sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.2/amd1704-rate-libs-revC/64;/home/cpu2017-1.0.2/amd1704-rate-libs-revC/32;"  
MALLOC\_CONF = "lg\_chunk:28"

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.  
The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers  
with gfortran.

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing  
of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

Sysinfo program /home/cpu2017-1.0.2/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-o8ns Wed Mar 14 20:02:00 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7251 8-Core Processor  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 8 12 16 20 24 28

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## Platform Notes (Continued)

physical 1: cores 0 8 12 16 20 24 28

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7251 8-Core Processor
Stepping:               2
CPU MHz:               2095.968
BogoMIPS:              4191.93
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              4096K
NUMA node0 CPU(s):    0,8,16,24
NUMA node1 CPU(s):    2,10,18,26
NUMA node2 CPU(s):    4,12,20,28
NUMA node3 CPU(s):    6,14,22,30
NUMA node4 CPU(s):    1,9,17,25
NUMA node5 CPU(s):    3,11,19,27
NUMA node6 CPU(s):    5,13,21,29
NUMA node7 CPU(s):    7,15,23,31
Flags:     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
          pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
          constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
          pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
          rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
          osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
          hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
          flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsqfsbase bmi1 avx2
          smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
          ibpb overflow_recov succor smca
```

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## Platform Notes (Continued)

physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24
node 0 size: 128623 MB
node 0 free: 128495 MB
node 1 cpus: 2 10 18 26
node 1 size: 129021 MB
node 1 free: 128904 MB
node 2 cpus: 4 12 20 28
node 2 size: 129021 MB
node 2 free: 128915 MB
node 3 cpus: 6 14 22 30
node 3 size: 129021 MB
node 3 free: 128904 MB
node 4 cpus: 1 9 17 25
node 4 size: 129021 MB
node 4 free: 128910 MB
node 5 cpus: 3 11 19 27
node 5 size: 129021 MB
node 5 free: 128895 MB
node 6 cpus: 5 13 21 29
node 6 size: 129021 MB
node 6 free: 128909 MB
node 7 cpus: 7 15 23 31
node 7 size: 129019 MB
node 7 free: 128907 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  16  16  16  28  28  22  28
  1: 16  10  16  16  28  28  28  22
  2: 16  16  10  16  22  28  28  28
  3: 16  16  16  10  28  22  28  28
  4: 28  28  22  28  10  16  16  16
  5: 28  28  28  22  16  10  16  16
  6: 22  28  28  28  16  16  10  16
  7: 28  22  28  28  16  16  16  10
```

From /proc/meminfo

```
MemTotal:      1056533368 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

```
From /etc/*release* /etc/*version*
SuSE-release:
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECCrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## Platform Notes (Continued)

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-o8ns 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 14 10:26

SPEC is set to: /home/cpu2017-1.0.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   844G   11G  834G   2% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Dell Inc. 1.0.9 01/05/2018
Memory:
16x 802C8632802C 72ASS8G72LZ-2G6B2 64 GB 4 rank 2666, configured at 2400
16x Not Specified Not Specified

(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## Compiler Version Notes (Continued)

=====  
CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

  AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

  
=====

CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

  AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

  AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

  
=====

FC 507.cactuBSSN\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

  AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

  AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## Compiler Version Notes (Continued)

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

=====

GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING

=====

=====

CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

=====

GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactusBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100  
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs  
-ljemalloc

Fortran benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx  
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc  
-lgfortran -lamdlibm

Benchmarks using both Fortran and C:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECCrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1  
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays  
-mno-avx2 -inline-threshold=1000 -O3(gfortran) -mavx -madx  
-funroll-loops -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1  
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays  
-mno-avx2 -inline-threshold=1000 -finline-aggressive -O3(gfortran)  
-mavx -madx -funroll-loops -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 96.4

SPECrate2017\_fp\_peak = 93.9

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Dec-2017

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -O3(clang) -mavx -ffast-math  
-O3(gfortran) -funroll-loops -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017\_fp\_base = 96.4

PowerEdge R7425 (AMD EPYC 7251, 2.10 GHz)

SPECCrate2017\_fp\_peak = 93.9

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Dec-2017

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lslr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=  
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>  
<http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>  
<http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-03-14 21:01:59-0400.

Report generated on 2019-02-21 14:26:43 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-03.