



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

**SPECrate2017\_int\_base = 281**

**SPECrate2017\_int\_peak = 310**

CPU2017 License: 001176


Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

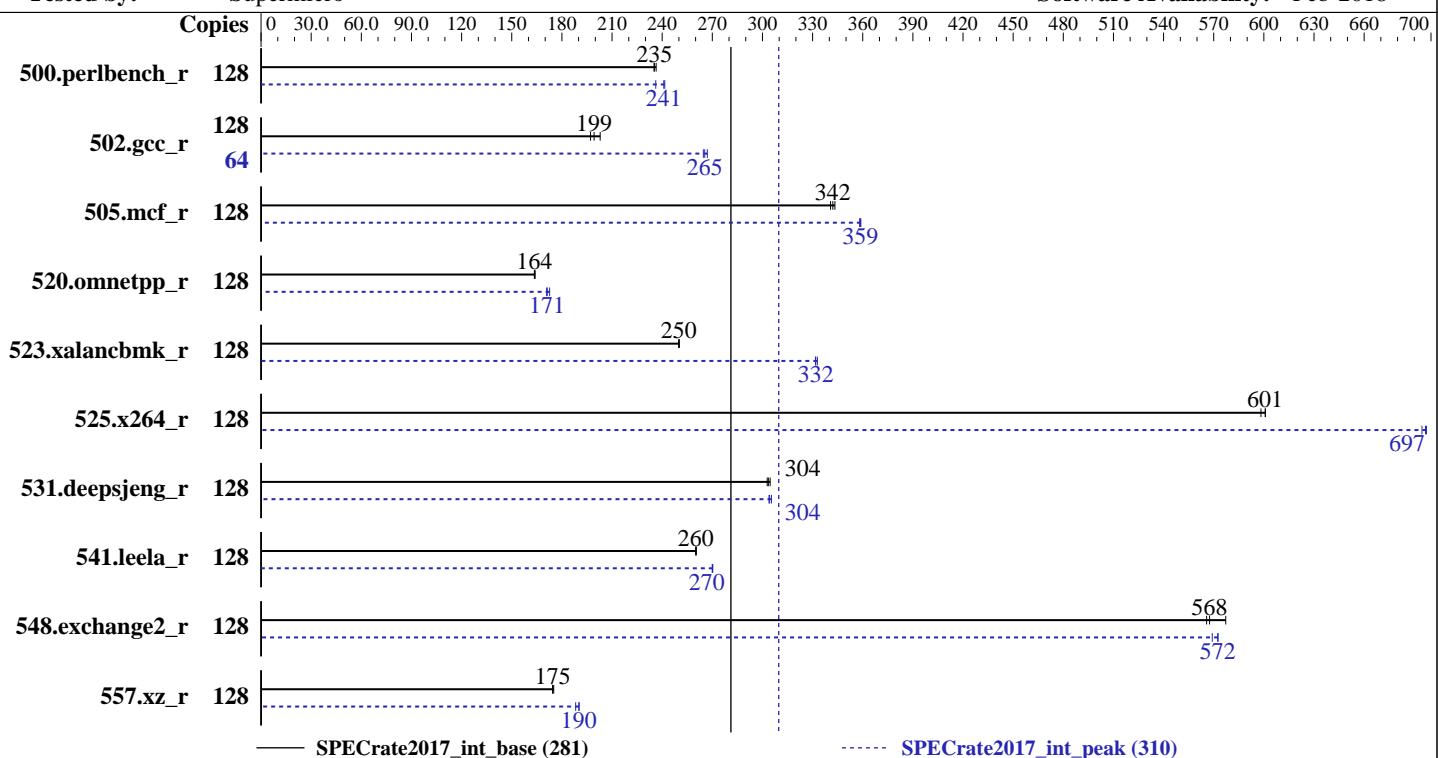

### Hardware

CPU Name: AMD EPYC 7601  
Max MHz.: 3200  
Nominal: 2200  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
Storage: 1 x 500 GB SATAIII, 7200 RPM  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
Compiler: kernel 4.4.114-94.11-default  
C/C++: Version 1.0.0 of AOCC  
Fortran: Version 4.8.2 of GCC  
Parallel: No  
Firmware: Supermicro BIOS version 1.1 released Feb-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc general purpose malloc implementation V4.5.0



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

**SPECrate2017\_int\_base = 281**

**SPECrate2017\_int\_peak = 310**

CPU2017 License: 001176

Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>866</b>	<b>235</b>	862	236	867	235	128	863	236	<b>846</b>	<b>241</b>	844	242		
502.gcc_r	128	893	203	919	197	<b>910</b>	<b>199</b>	64	342	265	<b>341</b>	<b>265</b>	339	267		
505.mcf_r	128	<b>605</b>	<b>342</b>	607	341	602	343	128	578	358	<b>577</b>	<b>359</b>	576	359		
520.omnetpp_r	128	1024	164	<b>1026</b>	<b>164</b>	1027	164	128	983	171	<b>981</b>	<b>171</b>	973	173		
523.xalancbmk_r	128	<b>541</b>	<b>250</b>	540	250	541	250	128	406	333	407	332	<b>407</b>	<b>332</b>		
525.x264_r	128	<b>373</b>	<b>601</b>	373	601	375	598	128	323	695	321	697	<b>322</b>	<b>697</b>		
531.deepsjeng_r	128	482	305	<b>483</b>	<b>304</b>	484	303	128	480	305	483	304	<b>482</b>	<b>304</b>		
541.leela_r	128	815	260	814	260	<b>815</b>	<b>260</b>	128	<b>785</b>	<b>270</b>	785	270	784	270		
548.exchange2_r	128	581	577	<b>591</b>	<b>568</b>	593	566	128	589	569	586	573	<b>586</b>	<b>572</b>		
557.xz_r	128	793	174	789	175	<b>792</b>	<b>175</b>	128	<b>727</b>	<b>190</b>	734	188	726	190		

**SPECrate2017\_int\_base = 281**

**SPECrate2017\_int\_peak = 310**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32;"  
MALLOC_CONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-769d Tue Apr 3 16:00:58 2018
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

CPU2017 License: 001176

Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

## Platform Notes (Continued)

```
model name : AMD EPYC 7601 32-Core Processor
  2 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7601 32-Core Processor
Stepping:               2
CPU MHz:                2200.000
CPU max MHz:           2200.0000
CPU min MHz:           1200.0000
BogoMIPS:              4399.48
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:                512K
L3 cache:                8192K
NUMA node0 CPU(s):     0-7,64-71
NUMA node1 CPU(s):     8-15,72-79
NUMA node2 CPU(s):     16-23,80-87
NUMA node3 CPU(s):     24-31,88-95
NUMA node4 CPU(s):     32-39,96-103
NUMA node5 CPU(s):     40-47,104-111
NUMA node6 CPU(s):     48-55,112-119
NUMA node7 CPU(s):     56-63,120-127
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
           pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
           constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

CPU2017 License: 001176

Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

## Platform Notes (Continued)

```
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c  
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch  
osvw skininit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb  
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean  
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2  
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero iperf  
ibpb overflow_recov succor smca
```

```
/proc/cpuinfo cache data  
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71  
node 0 size: 128848 MB  
node 0 free: 128684 MB  
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79  
node 1 size: 129021 MB  
node 1 free: 128842 MB  
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87  
node 2 size: 129021 MB  
node 2 free: 128856 MB  
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95  
node 3 size: 129021 MB  
node 3 free: 128865 MB  
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103  
node 4 size: 129021 MB  
node 4 free: 128916 MB  
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111  
node 5 size: 129021 MB  
node 5 free: 128920 MB  
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119  
node 6 size: 129021 MB  
node 6 free: 128918 MB  
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127  
node 7 size: 129019 MB  
node 7 free: 128918 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 16 16 16 32 32 32 32  
1: 16 10 16 16 32 32 32 32  
2: 16 16 10 16 32 32 32 32  
3: 16 16 16 10 32 32 32 32  
4: 32 32 32 32 10 16 16 16  
5: 32 32 32 32 16 10 16 16  
6: 32 32 32 32 16 16 10 16
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

CPU2017 License: 001176

Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

## Platform Notes (Continued)

7: 32 32 32 32 16 16 16 10

From /proc/meminfo

```
MemTotal:      1056763384 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-769d 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 3 15:50

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	422G	25G	397G	6%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.1 02/07/2018

Memory:

```
16x NO DIMM NO DIMM
16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667
```

(End of data from sysinfo program)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

CPU2017 License: 001176

Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

## Compiler Version Notes

=====

CC 502.gcc\_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CXXC 523.xalancbmk\_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CC 500.perlbench\_r(peak) 525.x264\_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

CXXC 541.leela\_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

FC 548.exchange2\_r(base, peak)

=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Base Portability Flags (Continued)

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-fno -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-fno -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc
```

Fortran benchmarks:

```
-fno -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

SPECCrate2017\_int\_base = 281

SPECCrate2017\_int\_peak = 310

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -D\_FILE\_OFFSET\_BITS=64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc

502.gcc\_r: -m32 -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -fgnu89-inline  
-L/root/work/lib/jemalloc/lib32 -ljemalloc

505.mcf\_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Supermicro**

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7601)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

**SPECrate2017\_int\_base = 281**

**SPECrate2017\_int\_peak = 310**

**Test Date:** Apr-2018

**Hardware Availability:** Jun-2017

**Software Availability:** Feb-2018

## Peak Optimization Flags (Continued)

520.omnetpp\_r (continued):

```
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

```
541.leela_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math
-Ofast -fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-03 04:00:57-0400.

Report generated on 2019-02-21 14:46:51 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-01.