



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
 (Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)
R271-Z31
 (AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141

SPECrate2017_int_peak = 155

CPU2017 License: 4872


Test Date: Apr-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2018

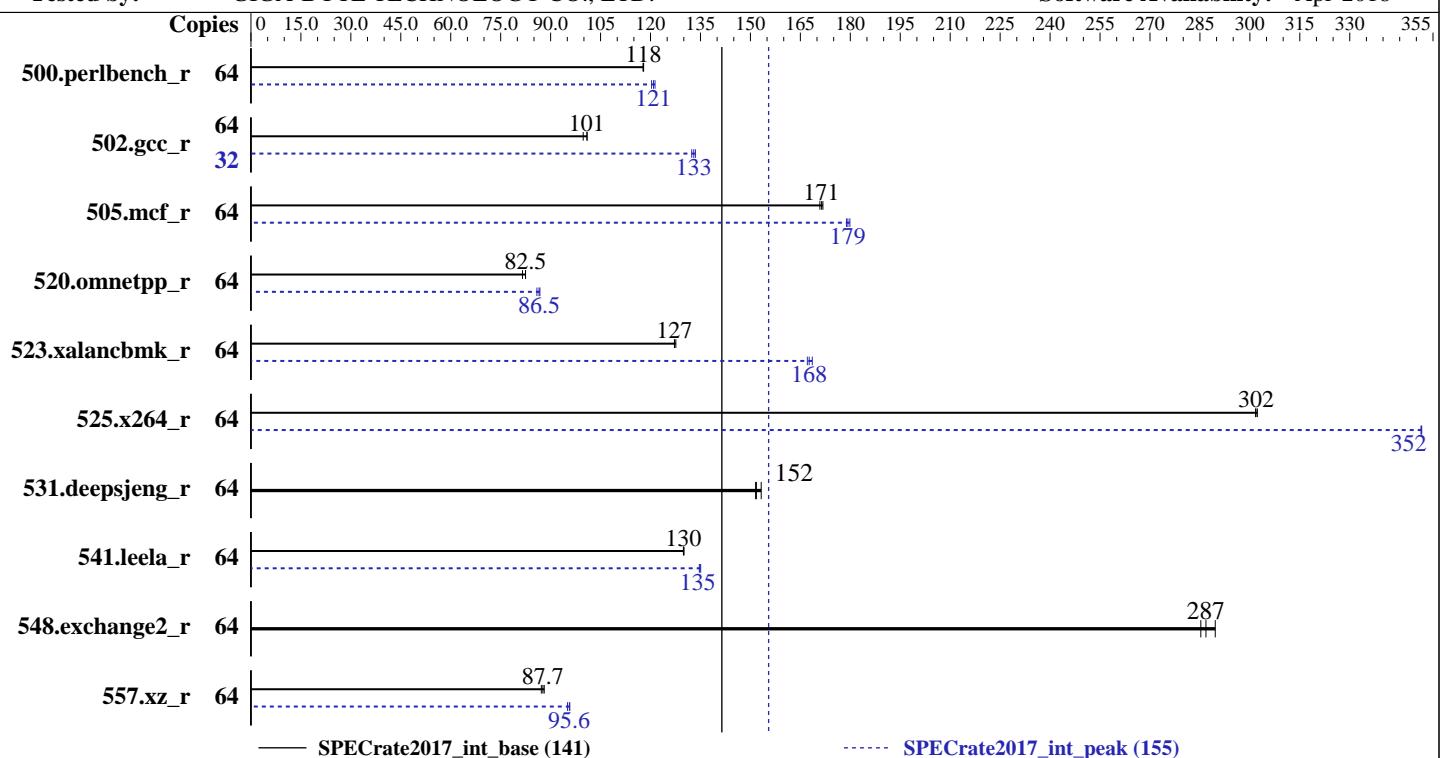

— SpecRate2017_int_base (141)

----- SpecRate2017_int_peak (155)

Hardware

CPU Name: AMD EPYC 7601
 Max MHz.: 3200
 Nominal: 2200
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
 Other: None
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2667V-L)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: Ubuntu 16.04.4 LTS
 kernel 4.4.0-116-generic
 Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: Version F07b released Apr-2018
 File System: ext4
 System State: Run Level 5 (multi-user, graphical)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc general purpose malloc implementation V4.5.0



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

R271-Z31

(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141

SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Date: Apr-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	865	118	864	118	864	118	64	847	120	840	121	843	121
502.gcc_r	64	908	99.8	898	101	898	101	32	341	133	342	132	339	133
505.mcf_r	64	603	171	605	171	602	172	64	578	179	577	179	575	180
520.omnetpp_r	64	1018	82.5	1018	82.5	1030	81.6	64	978	85.9	971	86.5	968	86.8
523.xalancbmk_r	64	531	127	531	127	530	128	64	401	169	403	168	404	167
525.x264_r	64	371	302	371	302	371	302	64	319	352	319	351	319	352
531.deepsjeng_r	64	483	152	479	153	484	152	64	483	152	479	153	484	152
541.leela_r	64	815	130	816	130	816	130	64	786	135	787	135	785	135
548.exchange2_r	64	588	285	579	290	585	287	64	588	285	579	290	585	287
557.xz_r	64	785	88.1	788	87.7	793	87.2	64	723	95.6	727	95.1	722	95.8

SPECrate2017_int_base = 141

SPECrate2017_int_peak = 155

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)
R271-Z31
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141
SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Date: Apr-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2018

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/amd/amd1704-rate-libs-revC/64;/home/amd/amd1704-rate-libs-revC/32;"
MALLOC_CONF = "lg_chunk:26"

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to $2^{21} = 2\text{MiB}$.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

Sysinfo program /home/amd/cpu2017-1.0.2.tar/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on amd-ubuntu Fri Apr 20 17:34:54 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7601 32-Core Processor

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)
R271-Z31
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141
SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Date: Apr-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2018

Platform Notes (Continued)

```
1 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 1
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 23
Model: 1
Model name: AMD EPYC 7601 32-Core Processor
Stepping: 2
CPU MHz: 2200.000
CPU max MHz: 2200.0000
CPU min MHz: 1200.0000
BogoMIPS: 4399.75
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 64K
L2 cache: 512K
L3 cache: 8192K
NUMA node0 CPU(s): 0-7,32-39
NUMA node1 CPU(s): 8-15,40-47
NUMA node2 CPU(s): 16-23,48-55
NUMA node3 CPU(s): 24-31,56-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skininit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
hw_pstate retpoline retpoline_amd vmmcall fsgsbase bmi1 avx2 smep bmi2 rdseed adx
smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero ibpb arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

R271-Z31

(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141

SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Date: Apr-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2018

Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
node 0 size: 128895 MB
node 0 free: 128572 MB
node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
node 1 size: 129019 MB
node 1 free: 128677 MB
node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55
node 2 size: 129019 MB
node 2 free: 128689 MB
node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
node 3 size: 129017 MB
node 3 free: 128708 MB
node distances:
node   0   1   2   3
 0: 10 16 16 16
 1: 16 10 16 16
 2: 16 16 10 16
 3: 16 16 16 10
```

From /proc/meminfo

```
MemTotal:      528334532 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

/usr/bin/lsb_release -d
Ubuntu 16.04.4 LTS

From /etc/*release* /etc/*version*
debian_version: stretch/sid
os-release:
 NAME="Ubuntu"
 VERSION="16.04.4 LTS (Xenial Xerus)"
 ID=ubuntu
 ID_LIKE=debian
 PRETTY_NAME="Ubuntu 16.04.4 LTS"
 VERSION_ID="16.04"
 HOME_URL="http://www.ubuntu.com/"
 SUPPORT_URL="http://help.ubuntu.com/"

uname -a:

```
Linux amd-ubuntu 4.4.0-116-generic #140-Ubuntu SMP Mon Feb 12 21:23:04 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)
R271-Z31
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141
SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Date: Apr-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2018

Platform Notes (Continued)

run-level 5 Apr 20 17:31

```
SPEC is set to: /home/amd/cpu2017-1.0.2.tar
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  219G  5.3G  203G   3%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS GIGABYTE F07b 04/02/2018

Memory:

```
8x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667
8x Unknown Unknown
```

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 502.gcc_r(peak)

=====

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
```

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CXXC 523.xalancbmk_r(peak)

=====

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
```

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base) 557.xz_r(base, peak)

=====

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD
(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)
R271-Z31
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141
SPECrate2017_int_peak = 155

CPU2017 License: 4872
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Apr-2018
Hardware Availability: Mar-2018
Software Availability: Apr-2018

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(peak) 525.x264_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 541.leela_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 548.exchange2_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

R271-Z31

(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141

SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Apr-2018

Hardware Availability: Mar-2018

Software Availability: Apr-2018

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

R271-Z31

(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141

SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Apr-2018

Hardware Availability: Mar-2018

Software Availability: Apr-2018

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lgfortran -lamdlibm

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc

502.gcc_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

R271-Z31

(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141

SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Date: Apr-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2018

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -fgnu89-inline  
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

```
505.mcf_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000  
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm  
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

R271-Z31

(AMD EPYC 7601, 2.20 GHz)

SPECrate2017_int_base = 141

SPECrate2017_int_peak = 155

CPU2017 License: 4872

Test Date: Apr-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-04-20 05:34:53-0400.

Report generated on 2019-02-21 14:56:18 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-16.