



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

**SPECrate2017\_fp\_base = 254**

**SPECrate2017\_fp\_peak = 259**

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

**Test Date:** Apr-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Feb-2018

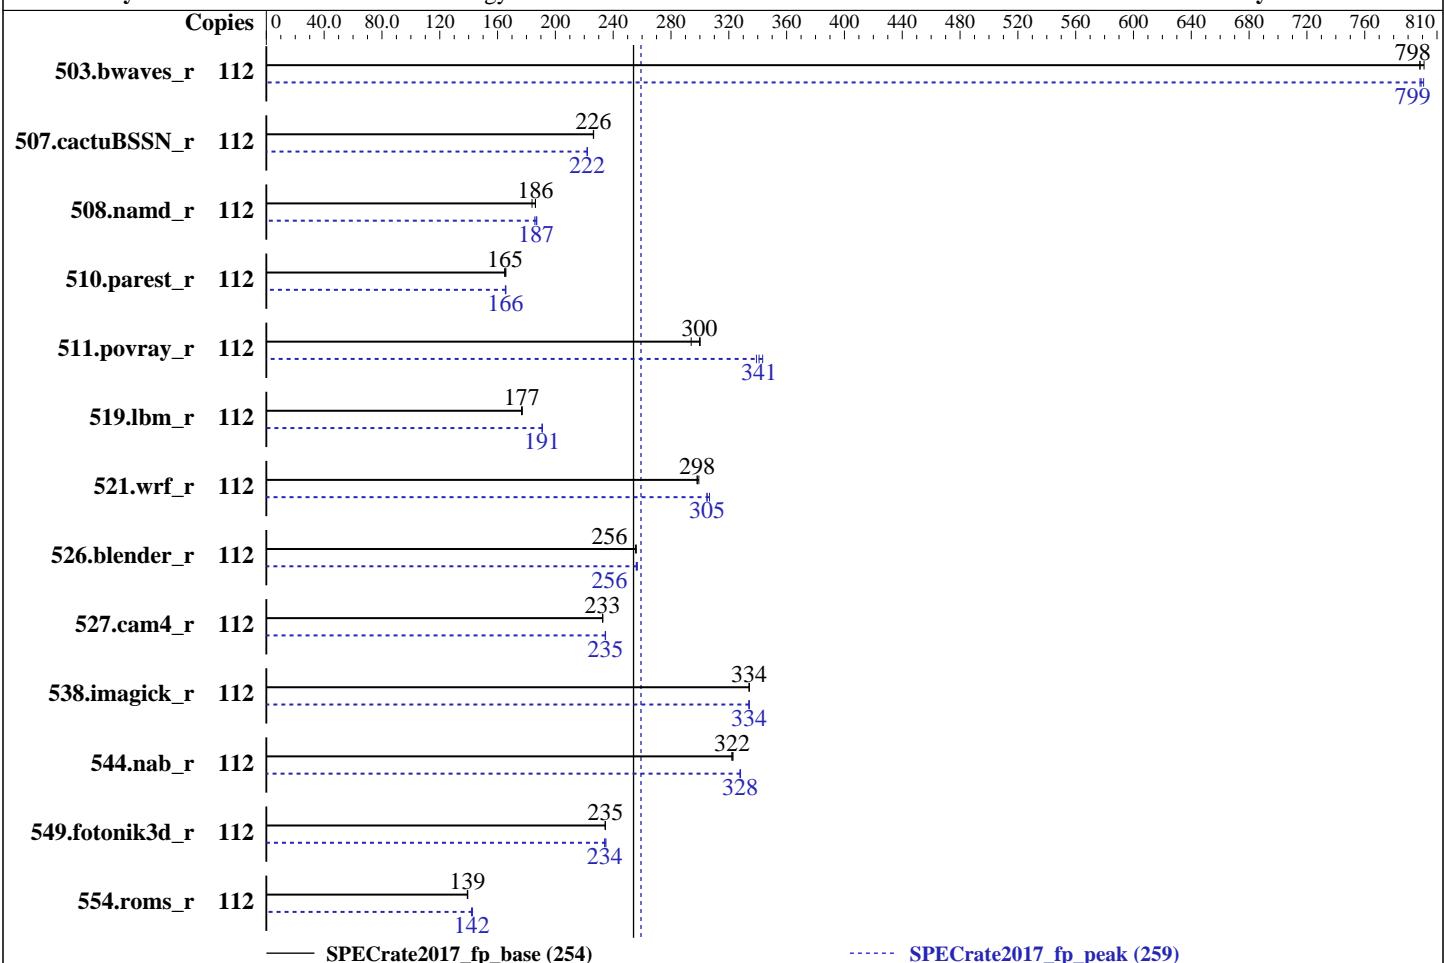

— SPECrate2017\_fp\_base (254)

----- SPECrate2017\_fp\_peak (259)

### Hardware

CPU Name: Intel Xeon Gold 5117  
Max MHz.: 2800  
Nominal: 2000  
Enabled: 56 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 19.25 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
Storage: 1 x 800 GB SAS SSD  
Other: None

### OS:

SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Kernel 4.4.114-92.64-default

### Compiler:

C/C++: Version 18.0.0.128 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran  
Compiler for Linux

### Parallel:

No

### Firmware:

Lenovo BIOS Version TEE119R 1.22 released Feb-2018

### File System:

xfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

64-bit

### Other:

None

### Software



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

**SPECrate2017\_fp\_base = 254**

**SPECrate2017\_fp\_peak = 259**

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	<b>1407</b>	<b>798</b>	1407	798	1402	801	112	1403	801	<b>1406</b>	<b>799</b>	1407	798		
507.cactusBSSN_r	112	<b>626</b>	<b>226</b>	626	226	627	226	112	<b>639</b>	<b>222</b>	639	222	638	222		
508.namd_r	112	579	184	571	186	<b>572</b>	<b>186</b>	112	568	187	<b>570</b>	<b>187</b>	573	186		
510.parest_r	112	1767	166	<b>1772</b>	<b>165</b>	1777	165	112	1771	165	1767	166	<b>1770</b>	<b>166</b>		
511.povray_r	112	<b>873</b>	<b>300</b>	890	294	871	300	112	771	339	761	343	<b>767</b>	<b>341</b>		
519.lbm_r	112	667	177	<b>668</b>	<b>177</b>	669	177	112	<b>618</b>	<b>191</b>	619	191	618	191		
521.wrf_r	112	<b>841</b>	<b>298</b>	842	298	838	299	112	818	307	<b>823</b>	<b>305</b>	823	305		
526.blender_r	112	667	256	<b>667</b>	<b>256</b>	667	256	112	<b>666</b>	<b>256</b>	666	256	664	257		
527.cam4_r	112	842	233	<b>842</b>	<b>233</b>	841	233	112	835	235	<b>835</b>	<b>235</b>	835	235		
538.imagick_r	112	834	334	<b>834</b>	<b>334</b>	834	334	112	<b>834</b>	<b>334</b>	833	334	834	334		
544.nab_r	112	584	323	585	322	<b>585</b>	<b>322</b>	112	575	328	574	328	<b>575</b>	<b>328</b>		
549.fotonik3d_r	112	1862	234	1860	235	<b>1860</b>	<b>235</b>	112	1857	235	1865	234	<b>1863</b>	<b>234</b>		
554.roms_r	112	1277	139	1280	139	<b>1278</b>	<b>139</b>	112	1247	143	<b>1251</b>	<b>142</b>	1253	142		

**SPECrate2017\_fp\_base = 254**

**SPECrate2017\_fp\_peak = 259**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

MONITORMWAIT set to Enable

Execute Disable Bit set to Disable

DCA set to Enable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on Electron-node-01 Tue Apr 10 13:11:37 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz

4 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 112

On-line CPU(s) list: 0-111

Thread(s) per core: 2

Core(s) per socket: 14

Socket(s): 4

NUMA node(s): 8

Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

## Platform Notes (Continued)

CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz  
Stepping: 4  
CPU MHz: 1995.304  
BogoMIPS: 3990.60  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 19712K  
NUMA node0 CPU(s): 0-3,7-9,56-59,63-65  
NUMA node1 CPU(s): 4-6,10-13,60-62,66-69  
NUMA node2 CPU(s): 14-17,21-23,70-73,77-79  
NUMA node3 CPU(s): 18-20,24-27,74-76,80-83  
NUMA node4 CPU(s): 28-31,35-37,84-87,91-93  
NUMA node5 CPU(s): 32-34,38-41,88-90,94-97  
NUMA node6 CPU(s): 42-45,49-51,98-101,105-107  
NUMA node7 CPU(s): 46-48,52-55,102-104,108-111  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm intel\_pt rsb\_ctxsw spec\_ctrl retrpline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavewc xgetbv1 cqm\_llc cqm\_occup\_llc

/proc/cpuinfo cache data  
cache size : 19712 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 7 8 9 56 57 58 59 63 64 65  
node 0 size: 193130 MB  
node 0 free: 192902 MB  
node 1 cpus: 4 5 6 10 11 12 13 60 61 62 66 67 68 69  
node 1 size: 193528 MB  
node 1 free: 193366 MB  
node 2 cpus: 14 15 16 17 21 22 23 70 71 72 73 77 78 79  
node 2 size: 193528 MB  
node 2 free: 193313 MB  
node 3 cpus: 18 19 20 24 25 26 27 74 75 76 80 81 82 83  
node 3 size: 193528 MB

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

## Platform Notes (Continued)

```
node 3 free: 193348 MB
node 4 cpus: 28 29 30 31 35 36 37 84 85 86 87 91 92 93
node 4 size: 193528 MB
node 4 free: 193371 MB
node 5 cpus: 32 33 34 38 39 40 41 88 89 90 94 95 96 97
node 5 size: 193528 MB
node 5 free: 193382 MB
node 6 cpus: 42 43 44 45 49 50 51 98 99 100 101 105 106 107
node 6 size: 193528 MB
node 6 free: 193382 MB
node 7 cpus: 46 47 48 52 53 54 55 102 103 104 108 109 110 111
node 7 size: 193525 MB
node 7 free: 193391 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  31  31
  1: 11  10  21  21  21  21  31  31
  2: 21  21  10  11  31  31  21  21
  3: 21  21  11  10  31  31  21  21
  4: 21  21  31  31  10  11  21  21
  5: 21  21  31  31  11  10  21  21
  6: 31  31  21  21  21  21  10  11
  7: 31  31  21  21  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      1584974924 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux Electron-node-01 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

Test Date: Apr-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

## Platform Notes (Continued)

(c6ce5db) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Apr 10 13:07

SPEC is set to: /home/cpu2017.1.0.2.ic18.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	688G	274G	415G	40%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE119R-1.22]- 02/06/2018

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base)

=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CC 519.lbm\_r(peak) 544.nab\_r(peak)

=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd\_r(base) 510.parest\_r(base)

=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd\_r(peak) 510.parest\_r(peak)

=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

=====

CC 511.povray\_r(base) 526.blender\_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(peak) 526.blender\_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN\_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN\_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

Test Date: Apr-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

=====

FC 554.roms\_r(peak)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

fort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc fort



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

Test Date: Apr-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

Test Date: Apr-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

Test Date: Apr-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.00 GHz, Intel Xeon Gold 5117)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 254

SPECrate2017\_fp\_peak = 259

Test Date: Apr-2018

Hardware Availability: Aug-2017

Software Availability: Feb-2018

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-10 01:11:36-0400.

Report generated on 2018-10-31 18:03:48 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.