



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

**Huawei 2288H V5 (Intel Xeon Gold 6144)**

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei


**SPECrate2017\_fp\_base = 132**

**SPECrate2017\_fp\_peak = 135**

Test Date: Jul-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

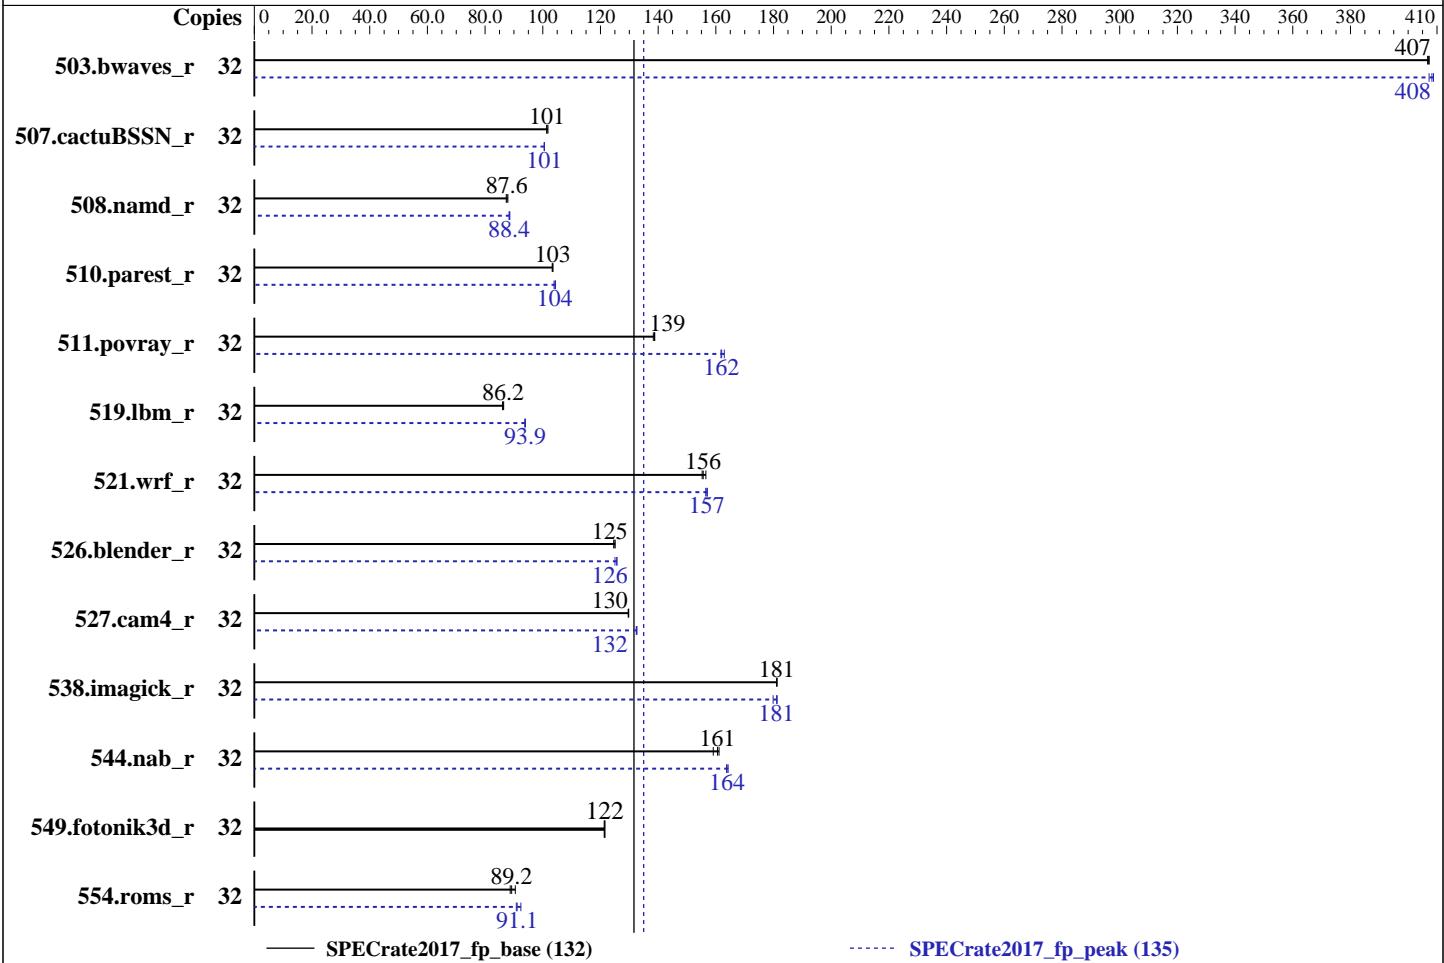

— SPECrate2017\_fp\_base (132)

····· SPECrate2017\_fp\_peak (135)

## Hardware

CPU Name: Intel Xeon Gold 6144  
 Max MHz.: 4200  
 Nominal: 3500  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 1200 GB SAS, 10000 RPM  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 0.62 Released Mar-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 2288H V5 (Intel Xeon Gold 6144)

**SPECrate2017\_fp\_base = 132**

**SPECrate2017\_fp\_peak = 135**

CPU2017 License: 3175

Test Date: Jul-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	789	407	<b>788</b>	<b>407</b>	788	407	32	785	409	788	407	<b>786</b>	<b>408</b>
507.cactuBSSN_r	32	398	102	<b>399</b>	<b>101</b>	400	101	32	403	100	403	101	<b>403</b>	<b>101</b>
508.namd_r	32	346	87.9	<b>347</b>	<b>87.6</b>	348	87.3	32	<b>344</b>	<b>88.4</b>	343	88.6	<b>344</b>	88.4
510.parest_r	32	<b>809</b>	<b>103</b>	811	103	809	103	32	802	104	806	104	<b>803</b>	<b>104</b>
511.povray_r	32	538	139	<b>539</b>	<b>139</b>	540	138	32	<b>461</b>	<b>162</b>	462	162	<b>459</b>	163
519.lbm_r	32	<b>391</b>	<b>86.2</b>	392	86.0	390	86.4	32	<b>359</b>	94.0	<b>359</b>	<b>93.9</b>	360	93.8
521.wrf_r	32	462	155	<b>461</b>	<b>156</b>	458	157	32	<b>457</b>	<b>157</b>	456	157	458	156
526.blender_r	32	391	125	<b>391</b>	<b>125</b>	390	125	32	388	126	390	125	<b>388</b>	<b>126</b>
527.cam4_r	32	432	130	431	130	<b>431</b>	<b>130</b>	32	422	133	423	132	<b>422</b>	<b>132</b>
538.imagick_r	32	<b>439</b>	<b>181</b>	439	181	440	181	32	442	180	<b>440</b>	<b>181</b>	439	181
544.nab_r	32	339	159	334	161	<b>335</b>	<b>161</b>	32	328	164	329	164	<b>329</b>	<b>164</b>
549.fotonik3d_r	32	1026	122	1028	121	<b>1026</b>	<b>122</b>	32	1026	122	1028	121	<b>1026</b>	<b>122</b>
554.roms_r	32	<b>570</b>	<b>89.2</b>	562	90.5	573	88.7	32	550	92.4	<b>558</b>	<b>91.1</b>	560	90.8

**SPECrate2017\_fp\_base = 132**

**SPECrate2017\_fp\_peak = 135**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 132

Huawei 2288H V5 (Intel Xeon Gold 6144)

SPECrate2017\_fp\_peak = 135

CPU2017 License: 3175

Test Date: Jul-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost.localdomain Fri Jul 6 21:29:35 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6144 CPU @ 3.50GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings   : 16
  physical 0: cores 0 1 2 3 10 11 24 27
  physical 1: cores 0 4 5 6 16 19 20 22
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6144 CPU @ 3.50GHz
Stepping:               4
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 132

Huawei 2288H V5 (Intel Xeon Gold 6144)

SPECrate2017\_fp\_peak = 135

CPU2017 License: 3175

Test Date: Jul-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Platform Notes (Continued)

CPU MHz: 3500.000  
BogoMIPS: 7000.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 25344K  
NUMA node0 CPU(s): 0-2,6,16-18,22  
NUMA node1 CPU(s): 3-5,7,19-21,23  
NUMA node2 CPU(s): 8,9,12,13,24,25,28,29  
NUMA node3 CPU(s): 10,11,14,15,26,27,30,31  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pnipclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_13 cdp\_13 invpcid\_single intel\_pt spec\_ctrl ibpb\_support tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavexc xgetbv1 cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts

/proc/cpuinfo cache data  
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 6 16 17 18 22  
node 0 size: 96437 MB  
node 0 free: 93560 MB  
node 1 cpus: 3 4 5 7 19 20 21 23  
node 1 size: 98304 MB  
node 1 free: 95649 MB  
node 2 cpus: 8 9 12 13 24 25 28 29  
node 2 size: 98304 MB  
node 2 free: 95679 MB  
node 3 cpus: 10 11 14 15 26 27 30 31  
node 3 size: 98304 MB  
node 3 free: 95474 MB  
node distances:  
node 0 1 2 3  
0: 10 11 21 21  
1: 11 10 21 21  
2: 21 21 10 11  
3: 21 21 11 10

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 132

Huawei 2288H V5 (Intel Xeon Gold 6144)

SPECrate2017\_fp\_peak = 135

CPU2017 License: 3175

Test Date: Jul-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:       394174484 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
2017 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 5 16:56

SPEC is set to: /spec2017

```
Filesystem           Type   Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs    1.8T  34G  1.8T   2%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.62 03/26/2018

Memory:

```
24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 132

Huawei 2288H V5 (Intel Xeon Gold 6144)

SPECrate2017\_fp\_peak = 135

CPU2017 License: 3175

Test Date: Jul-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Compiler Version Notes (Continued)

=====

CC 519.lbm\_r(peak) 544.nab\_r(peak)

=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd\_r(base) 510.parest\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd\_r(peak) 510.parest\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(base) 526.blender\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(peak) 526.blender\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 132

Huawei 2288H V5 (Intel Xeon Gold 6144)

SPECrate2017\_fp\_peak = 135

CPU2017 License: 3175

Test Date: Jul-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

FC 507.cactuBSSN\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

FC 554.roms\_r(peak)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 132

Huawei 2288H V5 (Intel Xeon Gold 6144)

SPECrate2017\_fp\_peak = 135

CPU2017 License: 3175

Test Date: Jul-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactusBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 2288H V5 (Intel Xeon Gold 6144)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_fp\_base = 132

SPECrate2017\_fp\_peak = 135

Test Date: Jul-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 2288H V5 (Intel Xeon Gold 6144)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_fp\_base = 132

SPECrate2017\_fp\_peak = 135

Test Date: Jul-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 2288H V5 (Intel Xeon Gold 6144)

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

SPECrate2017\_fp\_base = 132

SPECrate2017\_fp\_peak = 135

Test Date: Jul-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

## Peak Optimization Flags (Continued)

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 132

Huawei 2288H V5 (Intel Xeon Gold 6144)

SPECrate2017\_fp\_peak = 135

CPU2017 License: 3175

Test Date: Jul-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-07-06 21:29:34-0400.

Report generated on 2018-10-31 18:30:26 by CPU2017 PDF formatter v6067.

Originally published on 2018-08-07.