



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

**SPECrate2017\_int\_base = 195**

**SPECrate2017\_int\_peak = 206**

CPU2017 License: 9016


Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

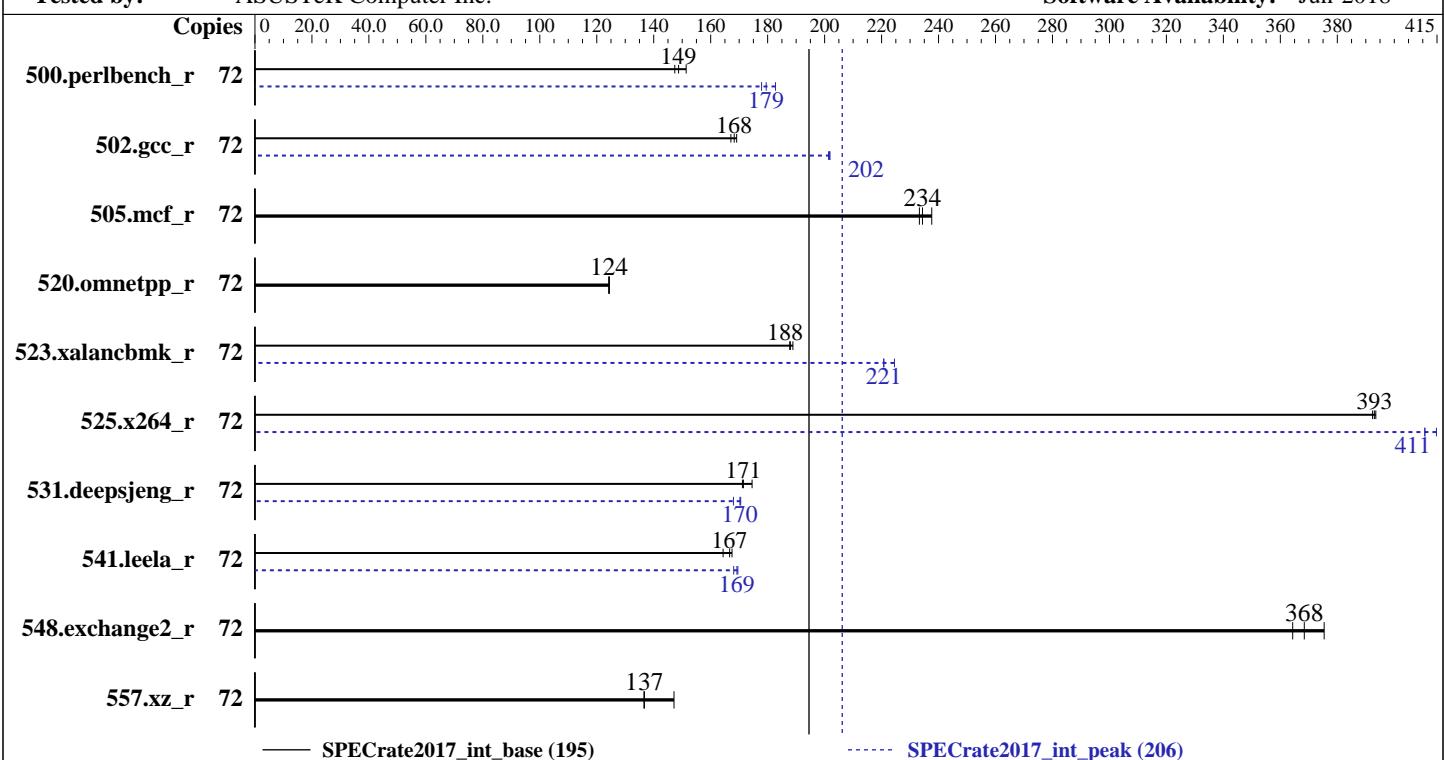

— SPECrate2017\_int\_base (195)

... SPECrate2017\_int\_peak (206)

### Hardware

CPU Name: Intel Xeon Gold 6140  
Max MHz.: 3700  
Nominal: 2300  
Enabled: 36 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 24.75 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 240 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
Compiler: Kernel 4.4.120-94.17-default  
C/C++: Version 18.0.3.222 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.3.222 of Intel Fortran  
Compiler for Linux  
Parallel: No  
Firmware: Version 0905 released Mar-2018  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

**SPECrate2017\_int\_base = 195**

**SPECrate2017\_int\_peak = 206**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	72	757	151	<b>771</b>	<b>149</b>	778	147	<b>72</b>	627	183	<b>639</b>	<b>179</b>	644	178		
502.gcc_r	72	603	169	<b>606</b>	<b>168</b>	610	167	<b>72</b>	505	202	506	201	<b>505</b>	<b>202</b>		
505.mcf_r	72	490	238	499	233	<b>496</b>	<b>234</b>	<b>72</b>	490	238	499	233	<b>496</b>	<b>234</b>		
520.omnetpp_r	72	760	124	<b>760</b>	<b>124</b>	759	124	<b>72</b>	760	124	<b>760</b>	<b>124</b>	759	124		
523.xalancbmk_r	72	<b>404</b>	<b>188</b>	405	188	403	189	<b>72</b>	345	221	339	225	<b>344</b>	<b>221</b>		
525.x264_r	72	321	392	320	394	<b>321</b>	<b>393</b>	<b>72</b>	304	415	307	411	<b>307</b>	<b>411</b>		
531.deepsjeng_r	72	473	175	<b>481</b>	<b>171</b>	482	171	<b>72</b>	484	171	<b>485</b>	<b>170</b>	491	168		
541.leela_r	72	712	167	<b>715</b>	<b>167</b>	725	164	<b>72</b>	<b>705</b>	<b>169</b>	703	170	709	168		
548.exchange2_r	72	518	364	<b>512</b>	<b>368</b>	503	375	<b>72</b>	518	364	<b>512</b>	<b>368</b>	503	375		
557.xz_r	72	529	147	<b>569</b>	<b>137</b>	569	137	<b>72</b>	529	147	<b>569</b>	<b>137</b>	569	137		

**SPECrate2017\_int\_base = 195**

**SPECrate2017\_int\_peak = 206**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

**SPECrate2017\_int\_base = 195**

**SPECrate2017\_int\_peak = 206**

**CPU2017 License:** 9016

**Test Date:** Aug-2018

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2018

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jun-2018

## General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

SNC = Enabled

IMC interleaving = 1 way

Patrol Scrub = Disabled

VT-d = Disabled

ENERGY\_PERF\_BIAS\_CFG mode = Performance

HyperThreading = Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-pmm5 Fri Aug 31 14:51:31 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz

2 "physical id"s (chips)

72 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 72

On-line CPU(s) list: 0-71

Thread(s) per core: 2

Core(s) per socket: 18

Socket(s): 2

NUMA node(s): 4

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

**SPECrate2017\_int\_base = 195**

**SPECrate2017\_int\_peak = 206**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Platform Notes (Continued)

```

Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
Stepping: 4
CPU MHz: 2301.000
CPU max MHz: 2301.0000
CPU min MHz: 1000.0000
BogoMIPS: 4692.18
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,36-38,41,42,45,46,50,51
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,39,40,43,44,47-49,52,53
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,54-56,59,60,63,64,68,69
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,57,58,61,62,65-67,70,71
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pkru ospke

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 9 10 14 15 36 37 38 41 42 45 46 50 51
node 0 size: 95305 MB
node 0 free: 95028 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 39 40 43 44 47 48 49 52 53
node 1 size: 96758 MB
node 1 free: 96550 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 54 55 56 59 60 63 64 68 69
node 2 size: 96758 MB
node 2 free: 96455 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 57 58 61 62 65 66 67 70 71
node 3 size: 96755 MB
node 3 free: 96494 MB

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

SPECrate2017\_int\_base = 195

SPECrate2017\_int\_peak = 206

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Platform Notes (Continued)

```
node distances:  
node  0   1   2   3  
0:  10  11  21  21  
1:  11  10  21  21  
2:  21  21  10  11  
3:  21  21  11  10
```

```
From /proc/meminfo  
MemTotal:      394832088 kB  
HugePages_Total:       0  
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*  
SuSE-release:  
  SUSE Linux Enterprise Server 12 (x86_64)  
  VERSION = 12  
  PATCHLEVEL = 3  
  # This file is deprecated and will be removed in a future service pack or release.  
  # Please check /etc/os-release for details about this release.  
os-release:  
  NAME="SLES"  
  VERSION="12-SP3"  
  VERSION_ID="12.3"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:  
Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):           Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1):  Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2):  Mitigation: IBRS+IBPB
```

run-level 3 Aug 31 14:51

```
SPEC is set to: /spec2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2        btrfs 203G  104G   99G  52%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

SPECrate2017\_int\_base = 195

SPECrate2017\_int\_peak = 206

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0905 03/19/2018

Memory:

12x Kingston D4-26662R4-32G 32 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
-----
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====
```

```
-----
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
    541.leela_r(base)
=====
```

```
-----
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 523.xalancbmk_r(peak) 531.deepsjeng_r(peak) 541.leela_r(peak)
=====
```

```
-----
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
=====
```

```
-----
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

**SPECrate2017\_int\_base = 195**

**SPECrate2017\_int\_peak = 206**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

**SPECrate2017\_int\_base = 195**

**SPECrate2017\_int\_peak = 206**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64 -std=c11

502.gcc\_r: icc -m32 -std=c11 -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

C++ benchmarks (except as noted below):

icpc -m64

523.xalancbmk\_r: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

Fortran benchmarks:

ifort -m64

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc

502.gcc\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: basepeak = yes

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.30 GHz, Intel Xeon Gold 6140)

SPECrate2017\_int\_base = 195

SPECrate2017\_int\_peak = 206

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Peak Optimization Flags (Continued)

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

541.leela\_r: Same as 531.deepsjeng\_r

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-08-31 02:51:30-0400.

Report generated on 2018-10-31 19:14:48 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-02.