



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 257

### Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

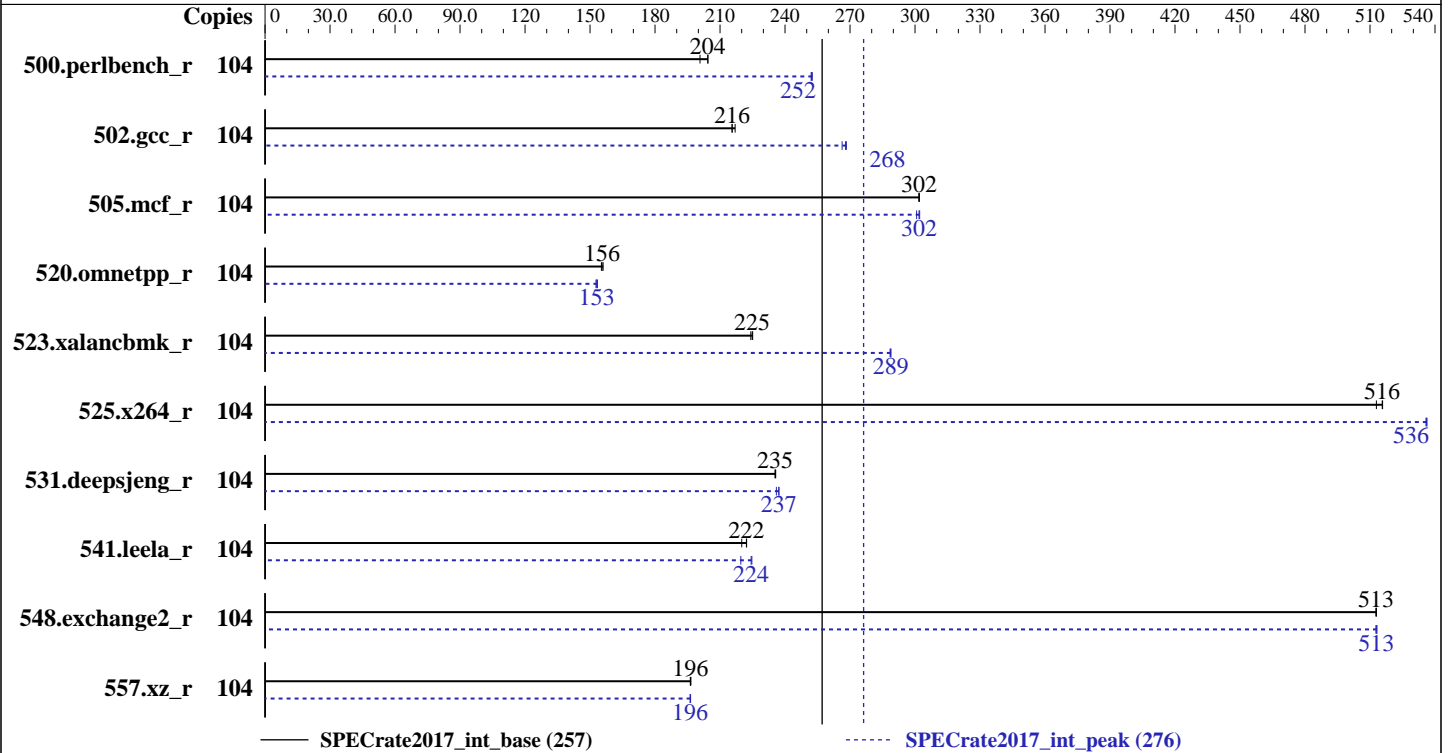

### Hardware

CPU Name: Intel Xeon Platinum 8170  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 52 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 200 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.17.9-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 4.0.4 released Jul-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	104	<b>810</b>	<b>204</b>	825	201	810	204	104	655	253	<b>656</b>	<b>252</b>	657	252
502.gcc_r	104	679	217	683	216	<b>683</b>	<b>216</b>	104	<b>550</b>	<b>268</b>	553	266	549	268
505.mcf_r	104	<b>557</b>	<b>302</b>	557	302	557	302	104	<b>557</b>	<b>302</b>	556	302	559	301
520.omnetpp_r	104	<b>877</b>	<b>156</b>	875	156	879	155	104	889	153	893	153	<b>891</b>	<b>153</b>
523.xalancbmk_r	104	490	224	<b>488</b>	<b>225</b>	488	225	104	<b>380</b>	<b>289</b>	380	289	381	288
525.x264_r	104	<b>353</b>	<b>516</b>	355	513	353	516	104	<b>340</b>	<b>536</b>	340	536	340	536
531.deepsjeng_r	104	506	235	<b>506</b>	<b>235</b>	506	236	104	503	237	505	236	<b>503</b>	<b>237</b>
541.leela_r	104	783	220	775	222	<b>775</b>	<b>222</b>	104	<b>768</b>	<b>224</b>	784	220	766	225
548.exchange2_r	104	<b>531</b>	<b>513</b>	531	513	531	513	104	531	513	<b>531</b>	<b>513</b>	531	513
557.xz_r	104	571	197	<b>572</b>	<b>196</b>	572	196	104	572	196	572	196	<b>572</b>	<b>196</b>

SPECrate2017\_int\_base = 257

SPECrate2017\_int\_peak = 276

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
The OS kernel (ver. 4.17.9) is a part of Inspur's performance boost suite which could be provide to customers who have special requirement. It's maintained and deployed by Inspur field engineer. Please see <http://en.inspur.com/en/2402530/2402532/2402644/2402655/2402659/2404072/index.html> or inquire [lcsd@inspur.com](mailto:lcsd@inspur.com) for further information.

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/ia32:/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-32:/home/CPU2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Sep-2018

**Hardware Availability:** Jul-2018

**Software Availability:** Jul-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS and OS configuration:  
SCALING\_GOVNOR set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
ClE Support set to Disable  
IMC (Integrated memory controller) Interleaving set to 1-way  
Sub NUMA Cluster (SNC) set to Enable  
Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-vzlr Tue Sep 4 12:13:16 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz  
2 "physical id"s (chips)  
104 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 26  
siblings : 52  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Sep-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** Jul-2018

### Platform Notes (Continued)

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               104
On-line CPU(s) list:  0-103
Thread(s) per core:   2
Core(s) per socket:   26
Socket(s):            2
NUMA node(s):        4
Vendor ID:            GenuineIntel
CPU family:           6
Model:               85
Model name:           Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
Stepping:             4
CPU MHz:              2799.984
CPU max MHz:          3700.0000
CPU min MHz:          1000.0000
BogoMIPS:             4200.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             36608K
NUMA node0 CPU(s):   0-3,7-9,13-15,20-22,52-55,59-61,65-67,72-74
NUMA node1 CPU(s):   4-6,10-12,16-19,23-25,56-58,62-64,68-71,75-77
NUMA node2 CPU(s):   26-29,33-35,39-41,46-48,78-81,85-87,91-93,98-100
NUMA node3 CPU(s):   30-32,36-38,42-45,49-51,82-84,88-90,94-97,101-103
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single pti
intel_ppin mba tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 52 53 54 55 59 60 61 65 66 67 72 73 74

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

### Platform Notes (Continued)

```

node 0 size: 192012 MB
node 0 free: 191467 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 56 57 58 62 63 64 68 69 70 71 75 76 77
node 1 size: 193531 MB
node 1 free: 193317 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 78 79 80 81 85 86 87 91 92 93 98 99
100
node 2 size: 193531 MB
node 2 free: 193342 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 82 83 84 88 89 90 94 95 96 97 101
102 103
node 3 size: 193384 MB
node 3 free: 193183 MB
node distances:
node  0  1  2  3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      790998332 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 2

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION\_ID="12.2"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

```

Linux linux-vzir 4.17.9-69-default #1 SMP Wed Jul 25 10:40:26 CST 2018 x86_64 x86_64
x86_64 GNU/Linux

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Sep-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** Jul-2018

### Platform Notes (Continued)

run-level 3 Sep 4 12:12 last=5

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	145G	120G	25G	84%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Inspur 4.0.4 07/19/2018

Memory:

24x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
     541.leela_r(base)
=====
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
=====
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 548.exchange2\_r(base, peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Peak Portability Flags (Continued)

531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc

502.gcc\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc

525.x264\_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017\_int\_base = 257

Inspur NF5280M5 (Intel Xeon Platinum 8170)

SPECrate2017\_int\_peak = 276

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

```
502.gcc_r: -m32 -std=c11
```

C++ benchmarks (except as noted below):

```
-m64
```

```
523.xalancbmk_r: -m32
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-09-04 00:13:15-0400.

Report generated on 2018-10-31 19:09:31 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-30.