



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120h-2M (Intel Xeon Bronze 3106)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation


**SPECrate2017\_fp\_base = 62.0**

**SPECrate2017\_fp\_peak = 64.1**

**Test Date:** Oct-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Mar-2018

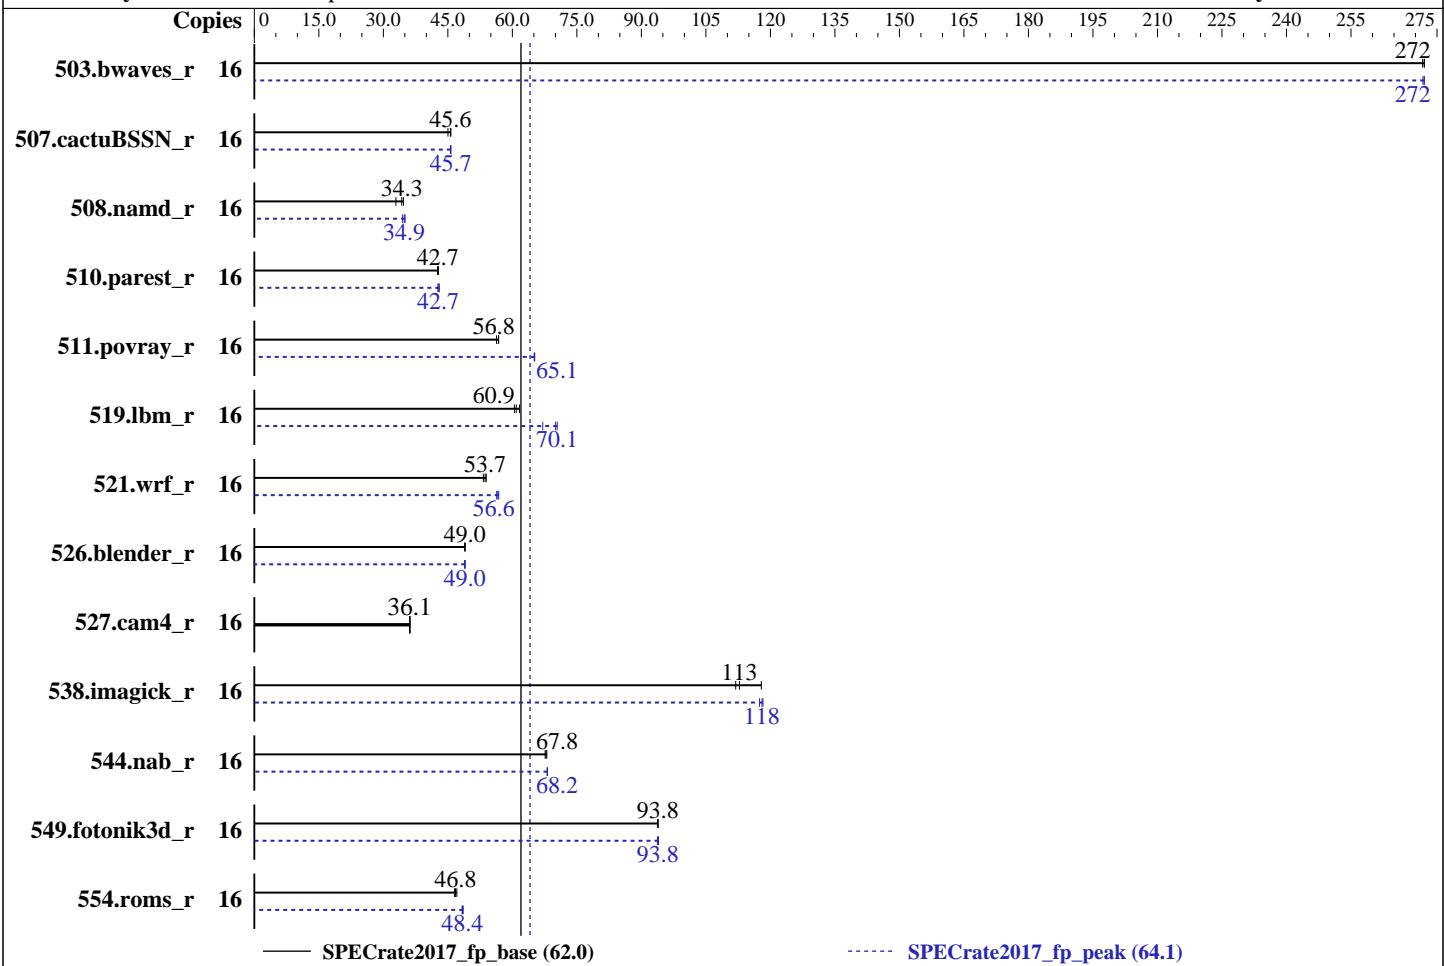

— SPECrate2017\_fp\_base (62.0)

····· SPECrate2017\_fp\_peak (64.1)

## Hardware

CPU Name: Intel Xeon Bronze 3106  
 Max MHz.: 1700  
 Nominal: 1700  
 Enabled: 16 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R,  
 running at 2133)  
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4  
 (Maipo)  
 Compiler: Kernel 3.10.0-693.21.1.el7.x86\_64  
 C/C++: Version 18.0.2.199 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.2.199 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: NEC BIOS Version U30 02/15/2018 released Mar-2018  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-2M (Intel Xeon Bronze 3106)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

**SPECrate2017\_fp\_base = 62.0**

**SPECrate2017\_fp\_peak = 64.1**

Test Date: Oct-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	591	272	590	272	<b>590</b>	<b>272</b>	16	590	272	<b>590</b>	<b>272</b>	590	272
507.cactuBSSN_r	16	<b>444</b>	<b>45.6</b>	443	45.7	450	45.0	16	443	45.7	444	45.6	<b>443</b>	<b>45.7</b>
508.namd_r	16	438	34.7	<b>443</b>	<b>34.3</b>	462	32.9	16	<b>436</b>	<b>34.9</b>	441	34.5	434	35.1
510.parest_r	16	<b>980</b>	<b>42.7</b>	982	42.6	977	42.8	16	979	42.7	<b>979</b>	<b>42.7</b>	973	43.0
511.povray_r	16	663	56.3	<b>658</b>	<b>56.8</b>	658	56.8	16	<b>574</b>	<b>65.1</b>	574	65.1	573	65.2
519.lbm_r	16	274	61.7	<b>277</b>	<b>60.9</b>	279	60.5	16	239	70.4	251	67.1	<b>241</b>	<b>70.1</b>
521.wrf_r	16	673	53.2	665	53.9	<b>668</b>	<b>53.7</b>	16	631	56.8	636	56.4	<b>633</b>	<b>56.6</b>
526.blender_r	16	498	48.9	<b>498</b>	<b>49.0</b>	497	49.0	16	<b>498</b>	<b>49.0</b>	498	48.9	497	49.0
527.cam4_r	16	775	36.1	<b>775</b>	<b>36.1</b>	772	36.2	16	775	36.1	<b>775</b>	<b>36.1</b>	772	36.2
538.imagick_r	16	<b>353</b>	<b>113</b>	338	118	355	112	16	339	117	336	118	<b>337</b>	<b>118</b>
544.nab_r	16	396	68.0	398	67.6	<b>397</b>	<b>67.8</b>	16	396	68.1	<b>395</b>	<b>68.2</b>	395	68.2
549.fotonik3d_r	16	<b>664</b>	<b>93.8</b>	665	93.8	664	93.9	16	665	93.7	663	94.0	<b>664</b>	<b>93.8</b>
554.roms_r	16	540	47.1	<b>543</b>	<b>46.8</b>	546	46.5	16	<b>525</b>	<b>48.4</b>	523	48.6	526	48.3

**SPECrate2017\_fp\_base = 62.0**

**SPECrate2017\_fp\_peak = 64.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECrate2017\_fp\_base = 62.0**

Express5800/R120h-2M (Intel Xeon Bronze 3106)

**SPECrate2017\_fp\_peak = 64.1**

**CPU2017 License:** 9006

**Test Date:** Oct-2018

**Test Sponsor:** NEC Corporation

**Hardware Availability:** Aug-2017

**Tested by:** NEC Corporation

**Software Availability:** Mar-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

**BIOS Settings:**

Thermal Configuration: Maximum Cooling

Workload Profile: General Throughput Compute

Memory Patrol Scrubbing: Disabled

LLC Dead Line Allocation: Disabled

LLC Prefetch: Enabled

Workload Profile: Custom

Sub-NUMA Clustering: Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on r120h2m Mon Oct 22 19:13:08 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 16

On-line CPU(s) list: 0-15

Thread(s) per core: 1

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-2M (Intel Xeon Bronze 3106)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017\_fp\_base = 62.0

SPECrate2017\_fp\_peak = 64.1

Test Date: Oct-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

## Platform Notes (Continued)

Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz  
Stepping: 4  
CPU MHz: 1700.000  
BogoMIPS: 3400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 11264K  
NUMA node0 CPU(s): 0-3,8-11  
NUMA node1 CPU(s): 4-7,12-15  
Flags: fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_l3 cdp\_l3 invpcid\_single intel\_pt spec\_ctrl ibpb\_support tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm arat pln pts

/proc/cpuinfo cache data  
cache size : 11264 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 8 9 10 11  
node 0 size: 196268 MB  
node 0 free: 191712 MB  
node 1 cpus: 4 5 6 7 12 13 14 15  
node 1 size: 196607 MB  
node 1 free: 192138 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 395932148 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-2M (Intel Xeon Bronze 3106)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017\_fp\_base = 62.0

SPECrate2017\_fp\_peak = 64.1

Test Date: Oct-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

## Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux r120h2m 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):	Mitigation: PTI
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2):	Mitigation: IBRS (kernel)

run-level 3 Oct 22 19:07

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	909G	630G	233G	74%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS NEC U30 02/15/2018

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2133

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
icc (ICC) 18.0.2 20180210
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120h-2M (Intel Xeon Bronze 3106)

**SPECrate2017\_fp\_base = 62.0**

**SPECrate2017\_fp\_peak = 64.1**

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Oct-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Mar-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 519.lbm\_r(peak)

====

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 508.namd\_r(base) 510.parest\_r(base, peak)

====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 508.namd\_r(peak)

====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(base) 526.blender\_r(base, peak)

====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

====

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(peak)

====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

====

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN\_r(base, peak)

====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120h-2M (Intel Xeon Bronze 3106)

**SPECrate2017\_fp\_base = 62.0**

**SPECrate2017\_fp\_peak = 64.1**

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Oct-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Mar-2018

## Compiler Version Notes (Continued)

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 554.roms\_r(peak)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-2M (Intel Xeon Bronze 3106)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017\_fp\_base = 62.0

SPECrate2017\_fp\_peak = 64.1

Test Date: Oct-2018

Hardware Availability: Aug-2017

Software Availability: Mar-2018

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-2M (Intel Xeon Bronze 3106)

**SPECrate2017\_fp\_base = 62.0**

**SPECrate2017\_fp\_peak = 64.1**

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Oct-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Mar-2018

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120h-2M (Intel Xeon Bronze 3106)

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**SPECrate2017\_fp\_base = 62.0**

**SPECrate2017\_fp\_peak = 64.1**

**Test Date:** Oct-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Mar-2018

## Peak Optimization Flags (Continued)

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

510.parest\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

521.wrf\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

526.blender\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120h-2M (Intel Xeon Bronze 3106)

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**SPECCrate2017\_fp\_base = 62.0**

**SPECCrate2017\_fp\_peak = 64.1**

**Test Date:** Oct-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Mar-2018

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-10-22 06:13:07-0400.

Report generated on 2018-11-13 15:13:27 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-13.