



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

CPU2017 License: 001176


Test Date: Nov-2018

Test Sponsor: Supermicro

Hardware Availability: Sep-2018

Tested by: Supermicro

Software Availability: Feb-2018

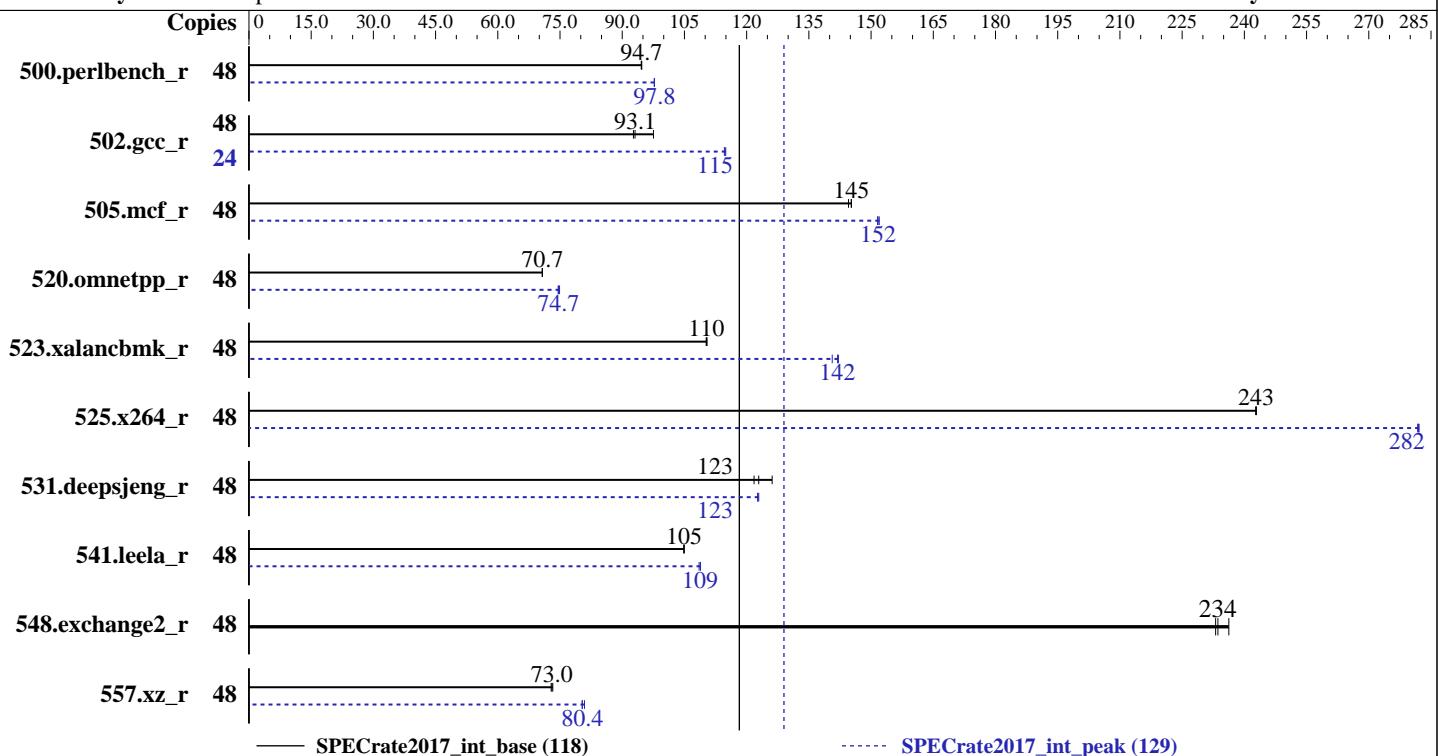

— Specrate2017_int_base (118)

----- Specrate2017_int_peak (129)

Hardware

CPU Name: AMD EPYC 7451
Max MHz.: 3200
Nominal: 2300
Enabled: 24 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores
Other: None
Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2666V-L)
Storage: 1 x 200 GB SATAIII SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
Compiler: kernel 4.4.114-94.11-default
C/C++: Version 1.0.0 of AOCC
Fortran: Version 4.8.2 of GCC
Parallel: No
Firmware: Supermicro BIOS version 1.0 released Sep-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc general purpose malloc implementation V4.5.0



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT, AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	807	94.7	807	94.7	808	94.6	48	782	97.7	782	97.8	782	97.8
502.gcc_r	48	730	93.1	697	97.5	733	92.7	24	296	115	296	115	296	115
505.mcf_r	48	534	145	537	145	534	145	48	511	152	512	152	510	152
520.omnetpp_r	48	891	70.7	890	70.8	890	70.7	48	844	74.7	845	74.5	841	74.9
523.xalancbmk_r	48	460	110	459	110	460	110	48	357	142	357	142	360	141
525.x264_r	48	346	243	346	243	346	243	48	298	282	298	282	298	282
531.deepsjeng_r	48	452	122	448	123	436	126	48	449	123	448	123	448	123
541.leela_r	48	758	105	758	105	758	105	48	732	109	730	109	730	109
548.exchange2_r	48	532	236	538	234	540	233	48	532	236	538	234	540	233
557.xz_r	48	711	72.9	708	73.3	710	73.0	48	641	80.9	645	80.3	645	80.4

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT, AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revD/64;/home/cpu2017/amd1704-rate-libs-revD/32"
MALLOC_CONF = "lg_chunk:26"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4 jemalloc, a general purpose malloc implementation, was obtained at <https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to $2^{21} = 2\text{MiB}$.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-pm02 Fri Nov 2 11:35:17 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7451 24-Core Processor
  1 "physical id"s (chips)
  48 "processors"
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
siblings   : 48
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             1
NUMA node(s):          4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7451 24-Core Processor
Stepping:               2
CPU MHz:               2300.000
CPU max MHz:           2300.0000
CPU min MHz:           1200.0000
BogoMIPS:              4599.74
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0-5,24-29
NUMA node1 CPU(s):    6-11,30-35
NUMA node2 CPU(s):    12-17,36-41
NUMA node3 CPU(s):    18-23,42-47
Flags:     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
          pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
          constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpf eagerfpu dni
          pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
          rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
          osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
          hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
          flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
          smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
          ibpb overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 128826 MB
node 0 free: 128651 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 129021 MB
node 1 free: 128865 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 129021 MB
node 2 free: 128876 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 129020 MB
node 3 free: 128867 MB
node distances:
node   0   1   2   3
  0: 10 16 16 16
  1: 16 10 16 16
  2: 16 16 10 16
  3: 16 16 16 10
```

From /proc/meminfo

```
MemTotal:      528271808 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.

os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-pm02 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

CPU2017 License: 001176

Test Date: Nov-2018

Test Sponsor: Supermicro

Hardware Availability: Sep-2018

Tested by: Supermicro

Software Availability: Feb-2018

Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retrpoline + IBPB

run-level 3 Nov 1 11:47

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	145G	5.6G	139G	4%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0 09/04/2018

Memory:

8x NO DIMM NO DIMM

8x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 502.gcc_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

CXXC 523.xalancbmk_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Compiler Version Notes (Continued)

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base) 557.xz_r(base, peak)
-----
```

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
-----
```

```
AOCC.LLVM.4.0.0.B35.2017_04_26)
-----
```

```
Target: x86_64-unknown-linux-gnu
-----
```

```
Thread model: posix
-----
```

```
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

```
=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
    peak) 541.leela_r(base)
-----
```

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
-----
```

```
Target: x86_64-unknown-linux-gnu
-----
```

```
Thread model: posix
-----
```

```
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

```
=====
CC 500.perlbench_r(peak) 525.x264_r(peak)
-----
```

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
-----
```

```
Target: x86_64-unknown-linux-gnu
-----
```

```
Thread model: posix
-----
```

```
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

```
=====
CXXC 541.leela_r(peak)
-----
```

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
-----
```

```
Target: x86_64-unknown-linux-gnu
-----
```

```
Thread model: posix
-----
```

```
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
GNU Fortran (GCC) 4.8.2
-----
```

```
Copyright (C) 2013 Free Software Foundation, Inc.
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Compiler Version Notes (Continued)

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-flto -Wl,-plugin-opt=-merge-constant

-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp

-O3 -ffast-math -march=znver1 -fstruct-layout=2

-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2

-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -z muldefs

-ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Base Optimization Flags (Continued)

C++ benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -march=znver1 -mlllvm -unroll-threshold=100 -finline-aggressive  
-fremap-arrays -mlllvm -inline-threshold=1000 -mlllvm -disable-vect-cmp  
-z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -maxx -madx -funroll-loops -ffast-math -z muldefs -Ofast  
-fdefault-integer-8 -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-lsr-in-nested-loop  
-fplugin-arg-dragonegg-llvm-option=-enable-iv-split  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc  
-lgfortran -lamdlibm
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Peak Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -fsto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc
```

```
502.gcc_r: -m32 -fsto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -fgnu89-inline -ljemalloc
```

```
505.mcf_r: -fsto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -fsto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc
```

```
523.xalancbmk_r: -m32 -fsto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7451)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 129

Test Date: Nov-2018

Hardware Availability: Sep-2018

Software Availability: Feb-2018

Peak Optimization Flags (Continued)

```
541.leela_r: -fno-lto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1  
-mllvm -unroll-count=8 -mllvm -unroll-threshold=100  
-ljemalloc
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
502.gcc_r: -L/root/work/lib/jemalloc/lib32
```

C++ benchmarks:

```
523.xalancbmk_r: -L/root/work/lib/jemalloc/lib32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aoicc100-flags-revC-I.2018-11-13.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aoicc100-flags-revC-I.2018-11-13.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-11-01 23:35:16-0400.

Report generated on 2018-11-27 13:30:03 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.