



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

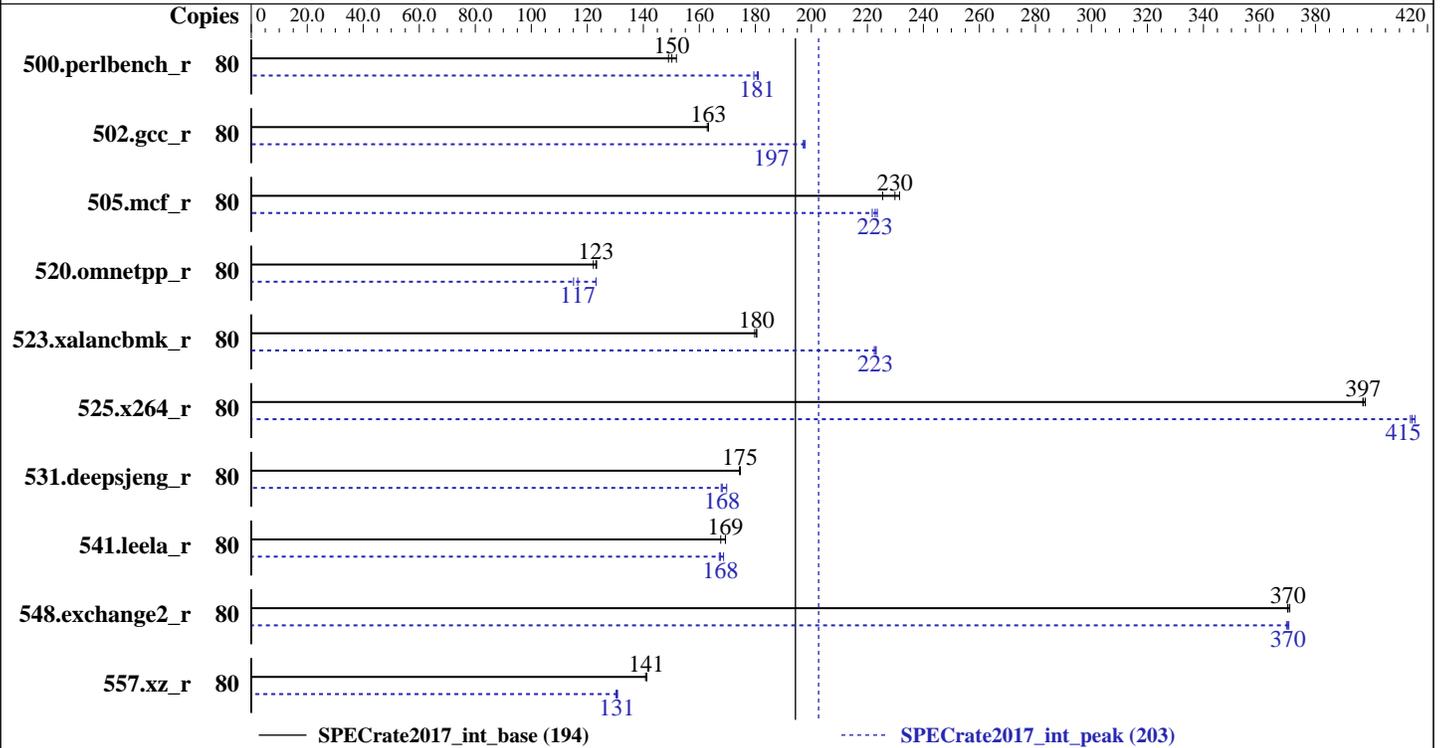

Hardware

CPU Name: Intel Xeon Gold 6138
 Max MHz.: 3700
 Nominal: 2000
 Enabled: 40 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 400 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.120-92.70-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 4.0.1 released Oct-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	848	150	839	152	855	149	80	703	181	705	181	710	179
502.gcc_r	80	694	163	694	163	696	163	80	573	198	575	197	574	197
505.mcf_r	80	559	231	562	230	573	225	80	578	224	583	222	580	223
520.omnetpp_r	80	851	123	853	123	859	122	80	853	123	912	115	900	117
523.xalancbmk_r	80	468	181	468	180	470	180	80	380	222	379	223	379	223
525.x264_r	80	353	397	353	397	352	398	80	337	416	338	414	338	415
531.deepsjeng_r	80	525	175	525	175	526	174	80	540	170	545	168	546	168
541.leela_r	80	782	169	790	168	783	169	80	786	169	791	168	793	167
548.exchange2_r	80	566	370	566	370	565	371	80	566	370	566	371	567	370
557.xz_r	80	614	141	612	141	612	141	80	661	131	663	130	662	131

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
Power Performance Tuning set to OS Controls
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-x58q Sat Jan 26 03:02:31 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
2 "physical id"s (chips)
80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 80
On-line CPU(s) list: 0-79
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 2

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

Platform Notes (Continued)

```

NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
Stepping:              4
CPU MHz:               1000.047
CPU max MHz:           3700.0000
CPU min MHz:           1000.0000
BogoMIPS:              3990.60
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              28160K
NUMA node0 CPU(s):    0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s):    3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s):    20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s):    23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 192097 MB
node 0 free: 191834 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 193528 MB
node 1 free: 193296 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 193528 MB
node 2 free: 193182 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 193525 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

Platform Notes (Continued)

```

node 3 free: 193277 MB
node distances:
node   0   1   2   3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

From /proc/meminfo
MemTotal:          791224448 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-x58q 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):           Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Jan 25 14:13

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   210G   28G  183G  13% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C240M5.4.0.1.139.1003182220 10/03/2018

Memory:

24x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)

icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -DSPEC_LP64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=3 -L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=3 -L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

```
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/opt/intel/lib/ia32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/opt/intel/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/home/cpu2017/je5.0.1-64/  
-ljemalloc
```

```
502.gcc_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/home/cpu2017/je5.0.1-32/ -ljemalloc
```

```
505.mcf_r: -w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/home/cpu2017/je5.0.1-64/  
-ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6138,
2.00 GHz)

SPECrate2017_int_base = 194

SPECrate2017_int_peak = 203

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

Peak Optimization Flags (Continued)

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/home/cpu2017/je5.0.1-64/ -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/home/cpu2017/je5.0.1-64/ -ljemalloc

523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/home/cpu2017/je5.0.1-32/ -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/home/cpu2017/je5.0.1-64/ -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-01-26 06:02:30-0500.

Report generated on 2019-02-19 14:00:00 by CPU2017 PDF formatter v6067.

Originally published on 2019-02-19.