



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55


Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Oct-2018

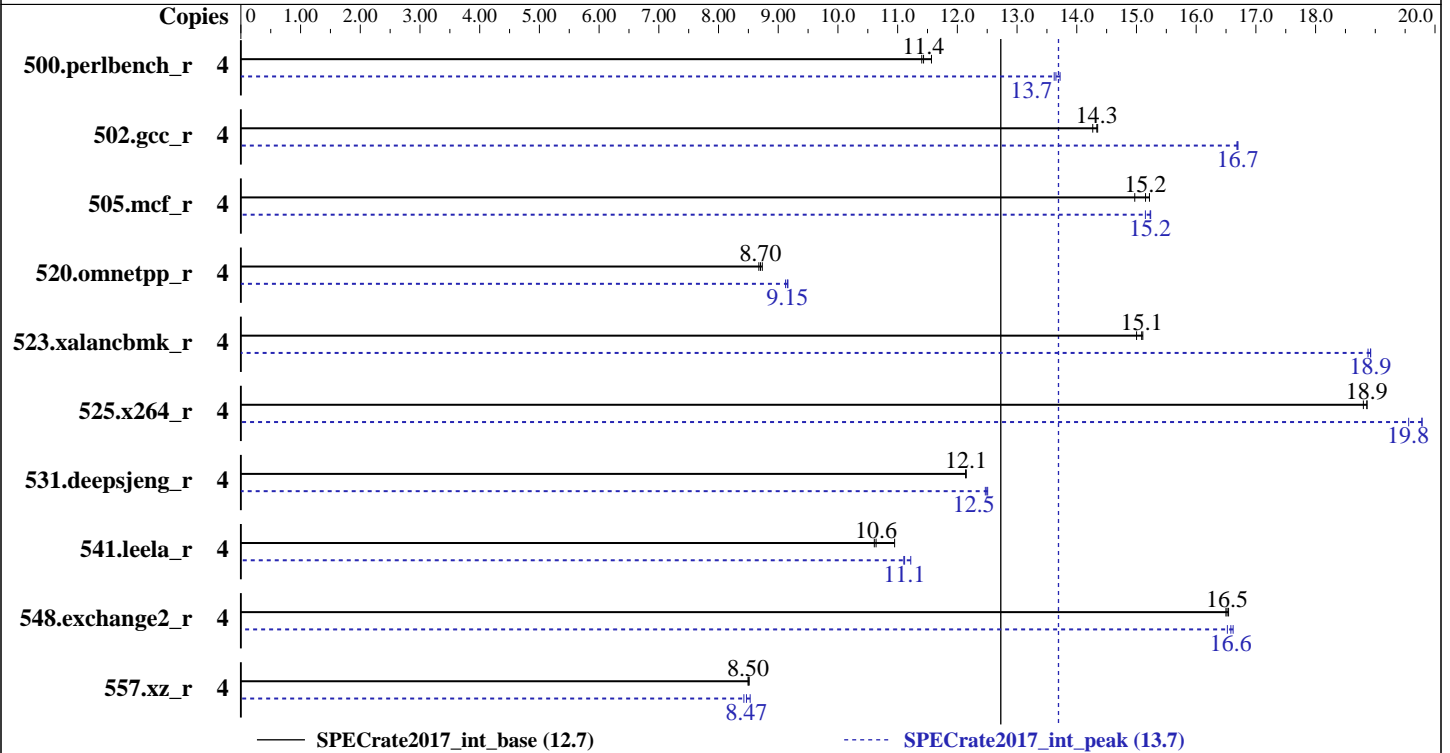

## Hardware

CPU Name: Intel Pentium Gold G5500  
 Max MHz.: 3800  
 Nominal: 3800  
 Enabled: 2 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 4 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3  
 kernel 4.4.126-94.22-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.1 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1;



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2019  
Hardware Availability: Dec-2018  
Software Availability: Oct-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	4	558	11.4	551	11.6	<b>557</b>	<b>11.4</b>	4	<b>466</b>	<b>13.7</b>	464	13.7	467	13.6
502.gcc_r	4	<b>395</b>	<b>14.3</b>	397	14.3	395	14.4	4	340	16.7	339	16.7	<b>339</b>	<b>16.7</b>
505.mcf_r	4	425	15.2	<b>427</b>	<b>15.2</b>	432	15.0	4	<b>424</b>	<b>15.2</b>	427	15.1	424	15.2
520.omnetpp_r	4	<b>603</b>	<b>8.70</b>	605	8.68	601	8.73	4	575	9.12	<b>573</b>	<b>9.15</b>	573	9.16
523.xalancbmk_r	4	282	15.0	280	15.1	<b>280</b>	<b>15.1</b>	4	223	18.9	<b>223</b>	<b>18.9</b>	224	18.9
525.x264_r	4	373	18.8	<b>371</b>	<b>18.9</b>	371	18.9	4	<b>354</b>	<b>19.8</b>	358	19.6	354	19.8
531.deepsjeng_r	4	378	12.1	<b>377</b>	<b>12.1</b>	377	12.1	4	366	12.5	368	12.5	<b>367</b>	<b>12.5</b>
541.leela_r	4	<b>623</b>	<b>10.6</b>	624	10.6	605	10.9	4	<b>596</b>	<b>11.1</b>	597	11.1	590	11.2
548.exchange2_r	4	635	16.5	634	16.5	<b>634</b>	<b>16.5</b>	4	631	16.6	<b>632</b>	<b>16.6</b>	634	16.5
557.xz_r	4	508	8.50	<b>508</b>	<b>8.50</b>	507	8.51	4	513	8.42	<b>510</b>	<b>8.47</b>	506	8.53

SPECrate2017\_int\_base = 12.7

SPECrate2017\_int\_peak = 13.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Dec-2018

Software Availability: Oct-2018

## General Notes (Continued)

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: sources available via jemalloc.net

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-gdas Mon Mar 25 09:46:17 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Pentium(R) Gold G5500 CPU @ 3.80GHz  
1 "physical id"s (chips)  
4 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 2  
siblings : 4  
physical 0: cores 0 1

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 4  
On-line CPU(s) list: 0-3  
Thread(s) per core: 2  
Core(s) per socket: 2  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Oct-2018

## Platform Notes (Continued)

```

CPU family:           6
Model:                158
Model name:           Intel(R) Pentium(R) Gold G5500 CPU @ 3.80GHz
Stepping:             11
CPU MHz:              3800.000
CPU max MHz:          3800.0000
CPU min MHz:          800.0000
BogoMIPS:             7583.98
Virtualization:      VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             256K
L3 cache:             4096K
NUMA node0 CPU(s):   0-3
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16
xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
lahf_lm abm 3dnowprefetch arat epb invpcid_single pln pts dtherm hwp hwp_act_window
hwp_epp intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap
clflushopt xsaveopt xsavec xgetbv1

```

```

/proc/cpuinfo cache data
cache size : 4096 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64278 MB
node 0 free: 63797 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo
MemTotal:          65820840 kB
HugePages_Total:   0
Hugepagesize:      2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Dec-2018

Software Availability: Oct-2018

## Platform Notes (Continued)

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION\_ID="12.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-gdas 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Mar 25 09:46 last=5

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	605G	16G	589G	3%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.1 10/19/2018

Memory:

3x 00AD00000A02 HMA82GU7CJR8N-VK 16 GB 2 rank 2666, configured at 2400

1x 00AD00000A06 HMA82GU7CJR8N-VK 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Dec-2018

Software Availability: Oct-2018

## Compiler Version Notes (Continued)

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Dec-2018

Software Availability: Oct-2018

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Dec-2018

Software Availability: Oct-2018

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib
-ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Oct-2018

## Peak Optimization Flags (Continued)

525.x264\_r: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-qopt-prefetch -qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib  
-ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

Fortran benchmarks:

-m64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 12.7

PowerEdge T140 (Intel Pentium Gold G5500)

SPECrate2017\_int\_peak = 13.7

**CPU2017 License:** 55

**Test Date:** Mar-2019

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Dec-2018

**Tested by:** Dell Inc.

**Software Availability:** Oct-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-25 10:46:17-0400.

Report generated on 2019-04-16 17:15:53 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-16.