



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

**SPECSspeed2017\_fp\_base = 189**

**SPECSspeed2017\_fp\_peak = 185**

CPU2017 License: 55


**Test Date:** Jul-2019

Test Sponsor: Dell Inc.

**Hardware Availability:** Apr-2019

Tested by: Dell Inc.

**Software Availability:** May-2019

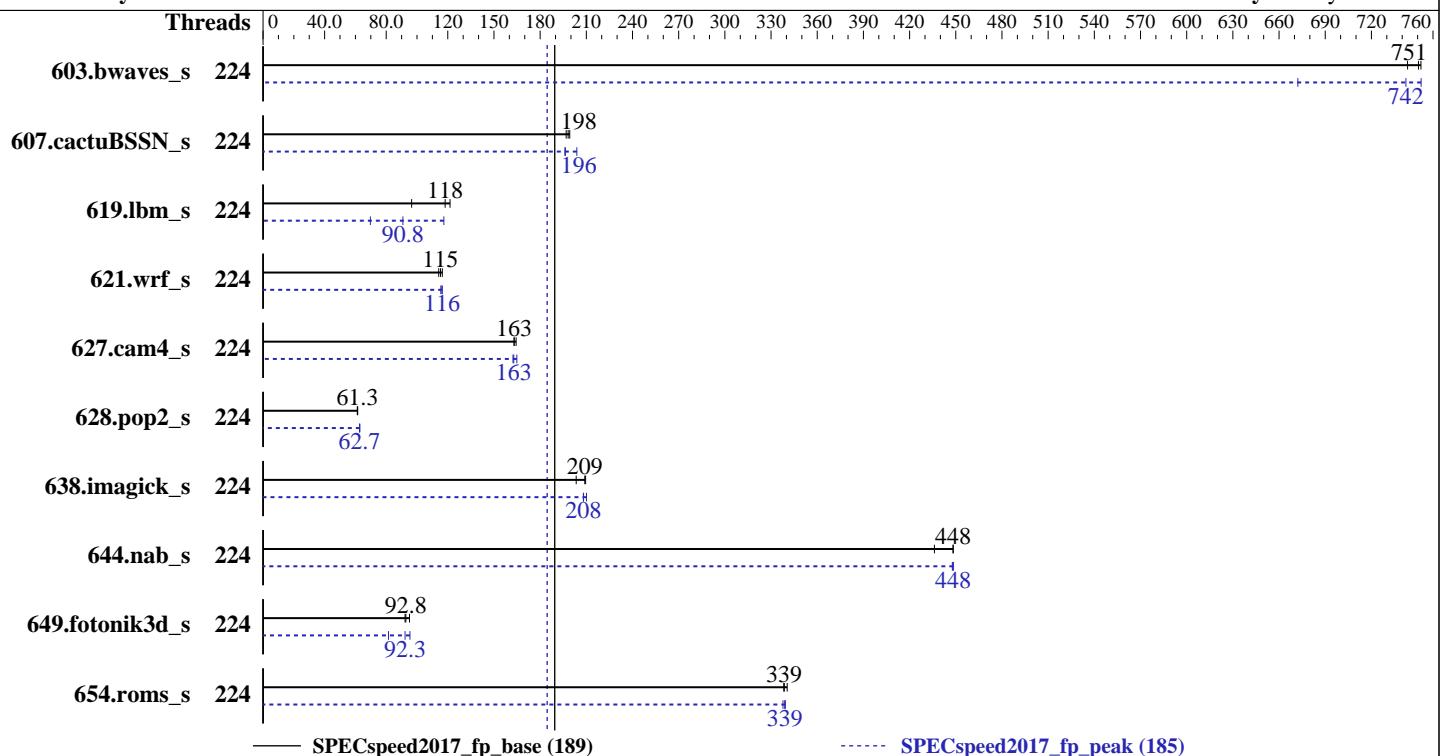

— SPECSspeed2017\_fp\_base (189)

----- SPECSspeed2017\_fp\_peak (185)

## Hardware

CPU Name: Intel Xeon Platinum 8276  
 Max MHz.: 4000  
 Nominal: 2200  
 Enabled: 112 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 1.6 TB NVMe SSD  
 Other: None

## Software

OS: Ubuntu 18.04.2 LTS  
 Compiler: kernel 4.15.0-45-generic  
 C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: Version 2.2.9 released May-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

**SPECSspeed2017\_fp\_base = 189**

**SPECSspeed2017\_fp\_peak = 185**

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	224	79.4	743	<b>78.6</b>	<b>751</b>	78.4	752	224	<b>79.5</b>	<b>742</b>	87.8	672	78.4	752
607.cactuBSSN_s	224	83.7	199	<b>84.1</b>	<b>198</b>	84.7	197	224	<b>84.9</b>	<b>196</b>	81.8	204	85.0	196
619.lbm_s	224	43.1	121	54.3	96.5	<b>44.3</b>	<b>118</b>	224	75.1	69.7	<b>57.7</b>	<b>90.8</b>	44.6	117
621.wrf_s	224	114	116	116	114	<b>115</b>	<b>115</b>	224	<b>114</b>	<b>116</b>	115	115	114	116
627.cam4_s	224	54.4	163	<b>54.3</b>	<b>163</b>	53.9	164	224	<b>54.4</b>	<b>163</b>	53.8	165	54.6	162
628.pop2_s	224	193	61.5	194	61.3	<b>194</b>	<b>61.3</b>	224	189	62.9	<b>189</b>	<b>62.7</b>	189	62.7
638.imagick_s	224	70.9	203	<b>69.0</b>	<b>209</b>	68.8	210	224	69.3	208	68.7	210	<b>69.3</b>	<b>208</b>
644.nab_s	224	40.1	436	39.0	448	<b>39.0</b>	<b>448</b>	224	39.0	448	39.0	448	<b>39.0</b>	<b>448</b>
649.fotonik3d_s	224	98.8	92.2	95.8	95.1	<b>98.3</b>	<b>92.8</b>	224	95.5	95.4	112	81.5	<b>98.8</b>	<b>92.3</b>
654.roms_s	224	46.2	340	46.5	338	<b>46.5</b>	<b>339</b>	224	46.6	338	<b>46.5</b>	<b>339</b>	46.4	339
<b>SPECSspeed2017_fp_base = 189</b>														
<b>SPECSspeed2017_fp_peak = 185</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

## Platform Notes

BIOS settings:

ADDDC setting disabled

Virtualization Technology disabled

DCU Streamer Prefetcher disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

**SPECspeed2017\_fp\_base = 189**

**SPECspeed2017\_fp\_peak = 185**

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**Test Date:** Jul-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Platform Notes (Continued)

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on intel-sut Fri Jul 5 19:41:35 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8276 CPU @ 2.20GHz
  4 "physical id"s (chips)
  224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                224
On-line CPU(s) list:  0-223
Thread(s) per core:   2
Core(s) per socket:   28
Socket(s):             4
NUMA node(s):          8
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8276 CPU @ 2.20GHz
Stepping:               5
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

**SPECspeed2017\_fp\_base = 189**

**SPECspeed2017\_fp\_peak = 185**

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Platform Notes (Continued)

CPU MHz: 3643.845

BogoMIPS: 4400.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 39424K

NUMA node0 CPU(s):

0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,176,184,192  
,200,208,216

NUMA node1 CPU(s):

1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,177,185,193  
,201,209,217

NUMA node2 CPU(s):

2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,178,186,19  
4,202,210,218

NUMA node3 CPU(s):

3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,187,19  
5,203,211,219

NUMA node4 CPU(s):

4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172,180,188,1  
96,204,212,220

NUMA node5 CPU(s):

5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189,1  
97,205,213,221

NUMA node6 CPU(s):

6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174,182,190,1  
98,206,214,222

NUMA node7 CPU(s):

7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,191,1  
99,207,215,223

Flags: fpu vme de pse tsc msr pae mce sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke flush\_l1d arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSspeed2017\_fp\_base = 189

SPECSspeed2017\_fp\_peak = 185

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136 144 152 160 168
176 184 192 200 208 216
node 0 size: 95145 MB
node 0 free: 94890 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137 145 153 161 169
177 185 193 201 209 217
node 1 size: 96741 MB
node 1 free: 96568 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138 146 154 162 170
178 186 194 202 210 218
node 2 size: 96762 MB
node 2 free: 96582 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155 163 171
179 187 195 203 211 219
node 3 size: 96762 MB
node 3 free: 96543 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156 164 172
180 188 196 204 212 220
node 4 size: 96762 MB
node 4 free: 96336 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157 165 173
181 189 197 205 213 221
node 5 size: 96762 MB
node 5 free: 96518 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142 150 158 166 174
182 190 198 206 214 222
node 6 size: 96762 MB
node 6 free: 96534 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159 167 175
183 191 199 207 215 223
node 7 size: 96760 MB
node 7 free: 96565 MB
node distances:
node   0    1    2    3    4    5    6    7
  0: 10  21  21  21  11  21  21  21
  1: 21  10  21  21  21  11  21  21
  2: 21  21  10  21  21  21  11  21
  3: 21  21  21  10  21  21  21  11
  4: 11  21  21  21  10  21  21  21
  5: 21  11  21  21  21  10  21  21
  6: 21  21  11  21  21  21  10  21
  7: 21  21  21  11  21  21  21  10
```

From /proc/meminfo

MemTotal: 791000020 kB

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

SPECSspeed2017\_fp\_base = 189

SPECSspeed2017\_fp\_peak = 185

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full generic retpoline, IBPB, IBRS_FW
```

```
run-level 5 Jul 4 01:02
```

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	47G	370G	12%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.9 05/08/2019

Memory:

24x	00AD00B300AD	HMA84GR7CJR4N-WM	32 GB	2 rank	2933
24x	Not Specified	Not Specified			

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

SPECSspeed2017\_fp\_base = 189

SPECSspeed2017\_fp\_peak = 185

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Compiler Version Notes

```
=====
CC 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base, peak)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base, peak)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

SPECSPEED2017\_fp\_base = 189

SPECSPEED2017\_fp\_peak = 185

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

```
=====
CC      621.wrf_s(peak) 628.pop2_s(peak)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECSPEED2017\_fp\_base = 189

SPECSPEED2017\_fp\_peak = 185

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

SPECSPEED2017\_fp\_base = 189

SPECSPEED2017\_fp\_peak = 185

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

649.fotonik3d\_s: Same as 603.bwaves\_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Platinum 8276, 2.20GHz)

SPECSspeed2017\_fp\_base = 189

SPECSspeed2017\_fp\_peak = 185

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-05 15:41:35-0400.

Report generated on 2019-08-21 12:04:31 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-20.