



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

SPECrate®2017_int_peak = 125

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

CPU2017 License: 9066


Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

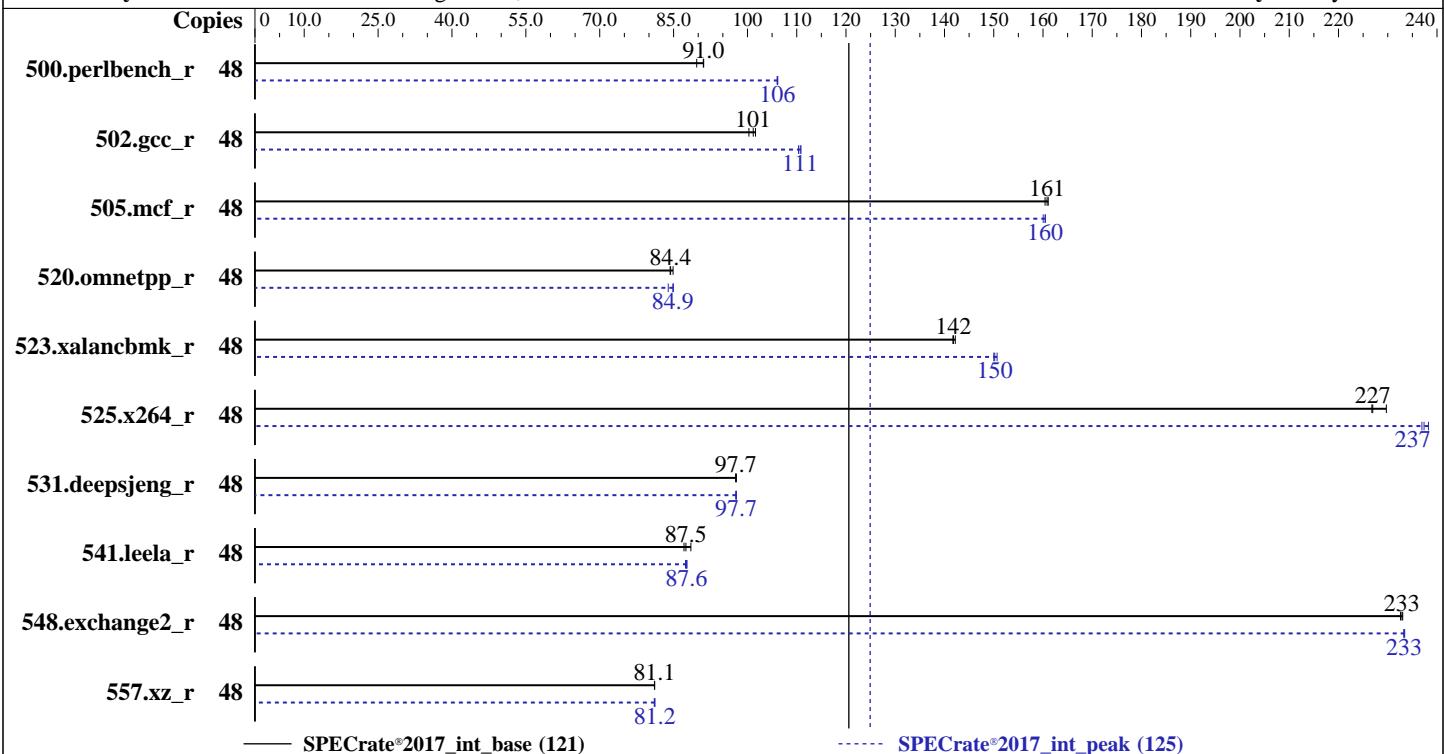

| Hardware | |
|------------|---|
| CPU Name: | Intel Xeon Silver 4116 |
| Max MHz: | 3000 |
| Nominal: | 2100 |
| Enabled: | 24 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 16.5 MB I+D on chip per chip |
| Other: | None |
| Memory: | 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400) |
| Storage: | 1 x 1 TB 7200RPM SATA HDD |
| Other: | None |

| Software | |
|-------------------|--|
| OS: | Red Hat Enterprise Linux Server release 7.5 (Maipo) |
| Compiler: | 3.10.0-957.el7.x86_64 C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; |
| Parallel: | Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux |
| Firmware: | No |
| File System: | Version 2.00.31 released Jul-2019 BIOS |
| System State: | xfs |
| Base Pointers: | Run level 3 (multi-user) |
| Peak Pointers: | 64-bit |
| Other: | 32/64-bit |
| Power Management: | jemalloc memory allocator V5.0.1 |



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|-------------|------------|-------------|------------|-------------|--------|------------|-------------|------------|-------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 48 | 839 | 91.1 | 852 | 89.7 | 839 | 91.0 | 48 | 720 | 106 | 720 | 106 | 721 | 106 |
| 502.gcc_r | 48 | 672 | 101 | 678 | 100 | 669 | 102 | 48 | 613 | 111 | 614 | 111 | 616 | 110 |
| 505.mcf_r | 48 | 484 | 160 | 482 | 161 | 482 | 161 | 48 | 485 | 160 | 483 | 160 | 483 | 160 |
| 520.omnetpp_r | 48 | 747 | 84.3 | 746 | 84.4 | 742 | 84.9 | 48 | 751 | 83.9 | 742 | 84.9 | 741 | 85.0 |
| 523.xalancbmk_r | 48 | 356 | 142 | 358 | 142 | 357 | 142 | 48 | 337 | 150 | 338 | 150 | 336 | 151 |
| 525.x264_r | 48 | 366 | 230 | 371 | 227 | 370 | 227 | 48 | 354 | 237 | 353 | 238 | 355 | 237 |
| 531.deepsjeng_r | 48 | 563 | 97.7 | 564 | 97.6 | 563 | 97.7 | 48 | 564 | 97.6 | 563 | 97.7 | 563 | 97.8 |
| 541.leela_r | 48 | 898 | 88.5 | 912 | 87.1 | 908 | 87.5 | 48 | 907 | 87.6 | 909 | 87.4 | 906 | 87.7 |
| 548.exchange2_r | 48 | 541 | 233 | 540 | 233 | 540 | 233 | 48 | 539 | 233 | 539 | 233 | 539 | 233 |
| 557.xz_r | 48 | 639 | 81.1 | 639 | 81.2 | 639 | 81.1 | 48 | 639 | 81.1 | 639 | 81.2 | 638 | 81.2 |

SPECrate®2017_int_base = 121

SPECrate®2017_int_peak = 125

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from [jemalloc.net](https://github.com/jemalloc/jemalloc/releases) or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Set SNC to Enabled

Set IMC Interleaving to 1-way Interleave

Set LLC Prefetch to Enabled

Set XPT Prefetch to Enabled

Set DCU Streamer Prefetch to Disabled

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on localhost.localdomain Fri Aug 23 03:27:45 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 12
  siblings : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   12
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
Stepping:               4
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Platform Notes (Continued)

CPU MHz: 2101.000
CPU max MHz: 2101.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-2,6-8,24-26,30-32
NUMA node1 CPU(s): 3-5,9-11,27-29,33-35
NUMA node2 CPU(s): 12-14,18-20,36-38,42-44
NUMA node3 CPU(s): 15-17,21-23,39-41,45-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavexc xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke spec_ctrl intel_stibp flush_lld

/proc/cpuinfo cache data
cache size : 16896 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32
node 0 size: 96919 MB
node 0 free: 88455 MB
node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35
node 1 size: 98304 MB
node 1 free: 95559 MB
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
node 2 size: 98304 MB
node 2 free: 95919 MB
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
node 3 size: 98304 MB
node 3 free: 95957 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
1: 11 10 21 21

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Platform Notes (Continued)

```
2: 21 21 10 11  
3: 21 21 11 10
```

```
From /proc/meminfo  
MemTotal: 394623568 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.5 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VARIANT="Server"  
  VARIANT_ID="server"  
  VERSION_ID="7.5"  
  PRETTY_NAME="OpenShift Enterprise"  
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:  
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

run-level 3 Aug 23 03:20

```
SPEC is set to: /home/speccpu  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 876G 79G 798G 9% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.00.31 07/04/2019

Memory:

12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666, configured at 2400
12x NO DIMM NO DIMM

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 523.xalancbmk_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 523.xalancbmk_r(peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 548.exchange2_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Peak Compiler Invocation (Continued)

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 121

H3C UniServer R4900 G3 (Intel Xeon Silver 4116)

SPECrate®2017_int_peak = 125

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Peak Optimization Flags (Continued)

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-23 03:27:44-0400.

Report generated on 2019-09-17 16:04:11 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.