



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276M)

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

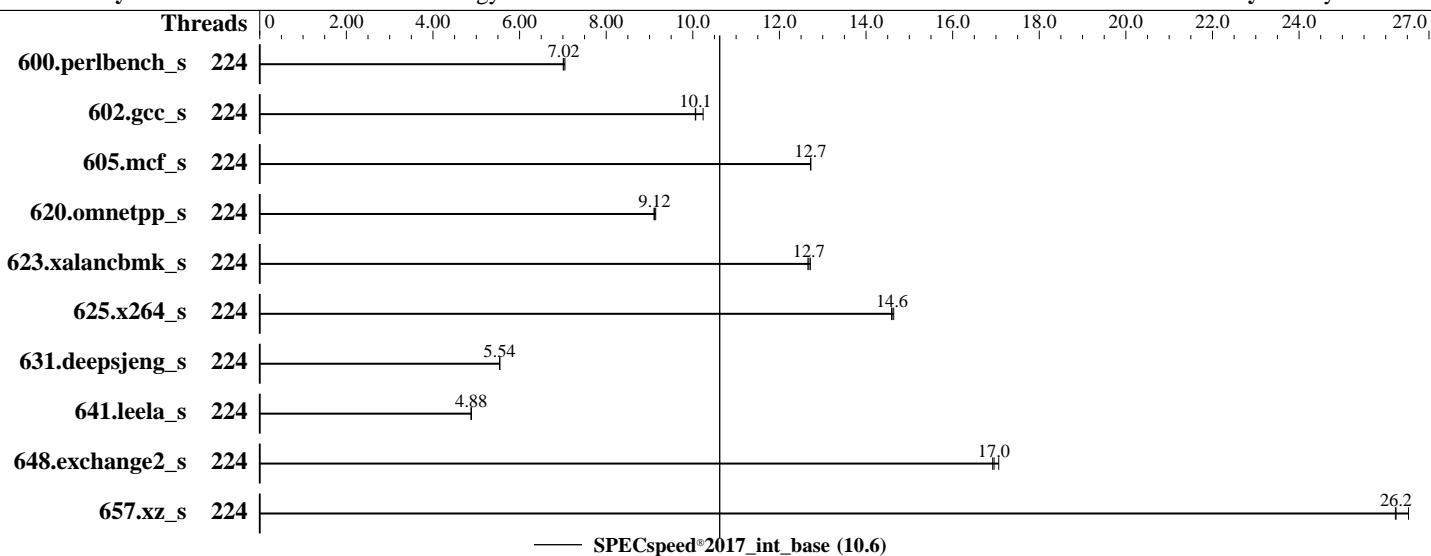

Hardware

CPU Name: Intel Xeon Platinum 8276M
Max MHz: 4000
Nominal: 2200
Enabled: 112 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 38.5 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)
Compiler: Kernel 3.10.0-957.el7.x86_64
C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;
Fortran: Version 19.0.4.227 of Intel Fortran
Compiler for Linux
Parallel: Yes
Firmware: Lenovo BIOS Version IVE142E 2.30 released Aug-2019 tested as IVE141E 2.30 Jul-2019
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: --



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276M)

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|---------|-------|---------|-------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 224 | 253 | 7.02 | 252 | 7.05 | 253 | 7.01 | | | | | | | |
| 602.gcc_s | 224 | 389 | 10.2 | 396 | 10.1 | 396 | 10.1 | | | | | | | |
| 605.mcf_s | 224 | 371 | 12.7 | 371 | 12.7 | 371 | 12.7 | | | | | | | |
| 620.omnetpp_s | 224 | 179 | 9.10 | 178 | 9.14 | 179 | 9.12 | | | | | | | |
| 623.xalancbmk_s | 224 | 111 | 12.7 | 112 | 12.7 | 112 | 12.7 | | | | | | | |
| 625.x264_s | 224 | 120 | 14.6 | 121 | 14.6 | 121 | 14.6 | | | | | | | |
| 631.deepsjeng_s | 224 | 259 | 5.54 | 259 | 5.54 | 259 | 5.54 | | | | | | | |
| 641.leela_s | 224 | 349 | 4.88 | 349 | 4.88 | 349 | 4.89 | | | | | | | |
| 648.exchange2_s | 224 | 173 | 17.0 | 174 | 16.9 | 172 | 17.1 | | | | | | | |
| 657.xz_s | 224 | 233 | 26.5 | 236 | 26.2 | 236 | 26.2 | | | | | | | |

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017-1.0.5-ic19.0u4/je5.0.1-64"
OMP_STACKSIZE = "192M"
```

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276M)

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Custom Mode

Page Policy set to Adaptive

Trusted Execution Technology set to Enable

CPU Frequency Limits set to Restrict Maximum Frequency

Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Tue Sep 10 19:25:18 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8276M CPU @ 2.20GHz
        4 "physical id"s (chips)
        224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 28
    siblings   : 56
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
    28 29 30
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
    28 29 30
    physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
    28 29 30
    physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
    28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               224
On-line CPU(s) list: 0-223
Thread(s) per core:  2
Core(s) per socket:  28
Socket(s):            4
NUMA node(s):         4
Vendor ID:            GenuineIntel
CPU family:           6
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276M)

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

Model: 85
Model name: Intel(R) Xeon(R) Platinum 8276M CPU @ 2.20GHz
Stepping: 6
CPU MHz: 2200.000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27,112-139
NUMA node1 CPU(s): 28-55,140-167
NUMA node2 CPU(s): 56-83,168-195
NUMA node3 CPU(s): 84-111,196-223
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_13 cdp_13 intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts hwp_epp pku ospke avx512_vnni spec_ctrl intel_stibp flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 39424 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133
134 135 136 137 138 139
node 0 size: 392885 MB
node 0 free: 383862 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158
159 160 161 162 163 164 165 166 167
node 1 size: 393216 MB
node 1 free: 383577 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186
187 188 189 190 191 192 193 194 195
node 2 size: 393216 MB
node 2 free: 384419 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276M)

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211
212 213 214 215 216 217 218 219 220 221 222 223
```

```
node 3 size: 393216 MB
```

```
node 3 free: 384171 MB
```

```
node distances:
```

```
node 0 1 2 3
```

```
0: 10 21 21 21
```

```
1: 21 10 21 21
```

```
2: 21 21 10 21
```

```
3: 21 21 21 10
```

```
From /proc/meminfo
```

```
MemTotal: 1584959312 kB
```

```
HugePages_Total: 0
```

```
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
```

```
os-release:
```

```
NAME="Red Hat Enterprise Linux Server"
```

```
VERSION="7.6 (Maipo)"
```

```
ID="rhel"
```

```
ID_LIKE="fedora"
```

```
VARIANT="Server"
```

```
VARIANT_ID="server"
```

```
VERSION_ID="7.6"
```

```
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
```

```
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
```

```
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
```

```
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
```

```
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

```
Kernel self-reported vulnerability status:
```

```
CVE-2017-5754 (Meltdown): Not affected
```

```
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
```

```
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

```
run-level 3 Sep 10 19:23
```

```
SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
```

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda2 | xfs | 839G | 24G | 815G | 3% | /home |

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276M)

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE141E-2.30]- 07/02/2019

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
| 625.x264_s(base) 657.xz_s(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
| 641.leela_s(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

Fortran | 648.exchange2_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276M)

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/jet5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-CLX-D.html>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.20 GHz, Intel Xeon Platinum 8276M)

SPECspeed®2017_int_base = 10.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-10 07:25:17-0400.

Report generated on 2019-10-01 14:27:39 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.