



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

**SPECspeed®2017\_int\_base = 10.8**

**SPECspeed®2017\_int\_peak = 11.0**

CPU2017 License: 001176


Test Date: Oct-2019

Test Sponsor: Supermicro

Hardware Availability: May-2019

Tested by: Supermicro

Software Availability: May-2019

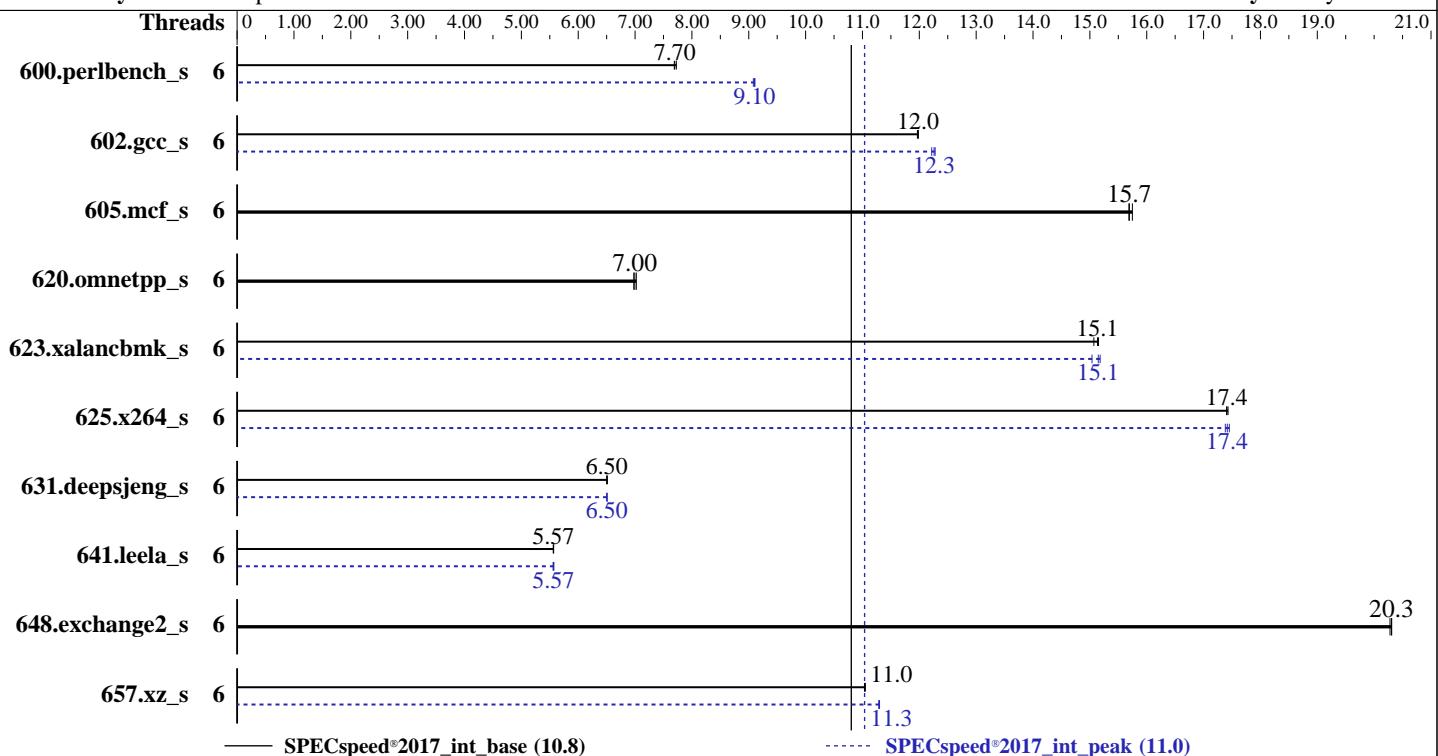

### Hardware

CPU Name: Intel Xeon E-2226G  
Max MHz: 4700  
Nominal: 3400  
Enabled: 6 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 12 MB I+D on chip per chip  
Other: None  
Memory: 128 GB (4 x 32 GB 2Rx8 PC4-2666V-E)  
Storage: 1 x 4 TB SATA III 7200 RPM  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
Compiler: Kernel 4.12.14-94.41-default  
C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: Version 1.0b released May-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: --



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.8

SPECspeed®2017\_int\_peak = 11.0

CPU2017 License: 001176

Test Date: Oct-2019

Test Sponsor: Supermicro

Hardware Availability: May-2019

Tested by: Supermicro

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	6	<b>231</b>	<b>7.70</b>	231	7.69	230	7.73	6	<b>195</b>	9.08	<b>195</b>	<b>9.10</b>	195	9.11
602.gcc_s	6	333	12.0	<b>332</b>	<b>12.0</b>	332	12.0	6	324	12.3	<b>325</b>	<b>12.3</b>	326	12.2
605.mcf_s	6	300	15.7	301	15.7	<b>301</b>	<b>15.7</b>	6	300	15.7	301	15.7	<b>301</b>	<b>15.7</b>
620.omnetpp_s	6	232	7.02	234	6.98	<b>233</b>	<b>7.00</b>	6	232	7.02	234	6.98	<b>233</b>	<b>7.00</b>
623.xalancbmk_s	6	<b>93.6</b>	<b>15.1</b>	93.5	15.2	94.0	15.1	6	93.3	15.2	<b>93.5</b>	<b>15.1</b>	94.2	15.0
625.x264_s	6	101	17.4	<b>101</b>	<b>17.4</b>	101	17.4	6	101	17.4	101	17.5	<b>101</b>	<b>17.4</b>
631.deepsjeng_s	6	220	6.50	<b>220</b>	<b>6.50</b>	220	6.51	6	<b>220</b>	<b>6.50</b>	220	6.50	220	6.51
641.leela_s	6	307	5.56	306	5.57	<b>306</b>	<b>5.57</b>	6	307	5.56	<b>307</b>	<b>5.57</b>	306	5.57
648.exchange2_s	6	<b>145</b>	<b>20.3</b>	145	20.3	145	20.3	6	<b>145</b>	<b>20.3</b>	145	20.3	145	20.3
657.xz_s	6	559	11.1	560	11.0	<b>560</b>	<b>11.0</b>	6	548	11.3	<b>547</b>	<b>11.3</b>	547	11.3
SPECspeed®2017_int_base = 10.8							SPECspeed®2017_int_peak = 11.0							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 10.8

SPECspeed®2017\_int\_peak = 11.0

Test Date: Oct-2019

Hardware Availability: May-2019

Software Availability: May-2019

## General Notes (Continued)

sources available from [jemalloc.net](http://jemalloc.net) or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011

running on linux-cq1s Thu Oct 31 10:05:12 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2226G CPU @ 3.40GHz
  1 "physical id"s (chips)
  6 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 6
  siblings   : 6
  physical 0: cores 0 1 2 3 4 5
```

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	6
On-line CPU(s) list:	0-5
Thread(s) per core:	1
Core(s) per socket:	6
Socket(s):	1
NUMA node(s):	1
Vendor ID:	GenuineIntel
CPU family:	6
Model:	158
Model name:	Intel(R) Xeon(R) E-2226G CPU @ 3.40GHz
Stepping:	10
CPU MHz:	3400.000
CPU max MHz:	4700.0000
CPU min MHz:	800.0000
BogoMIPS:	6816.00
Virtualization:	VT-x
L1d cache:	32K
L1i cache:	32K
L2 cache:	256K

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 10.8

SPECspeed®2017\_int\_peak = 11.0

Test Date: Oct-2019

Hardware Availability: May-2019

Software Availability: May-2019

## Platform Notes (Continued)

```
L3 cache: 12288K
NUMA node0 CPU(s): 0-5
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
pti ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmil hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt
xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window
hwp_epp flush_lll
```

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 128551 MB
node 0 free: 110400 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 131636340 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 10.8

SPECspeed®2017\_int\_peak = 11.0

Test Date: Oct-2019

Hardware Availability: May-2019

Software Availability: May-2019

## Platform Notes (Continued)

```
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
```

```
Linux linux-cq1s 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Mitigation: PTE Inversion; VMX: conditional cache flushes, SMT disabled
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

```
run-level 3 Oct 30 19:28
```

```
SPEC is set to: /home/cpu2017
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	3.6T	117G	3.5T	4%	/home

```
From /sys/devices/virtual/dmi/id
```

BIOS:	American Megatrends Inc.	1.0b	05/16/2019
Vendor:	Supermicro		
Product:	Super Server		
Serial:	0123456789		

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
4x Samsung M391A4G43MB1-CTD 32 GB 2 rank 2667
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 10.8

SPECspeed®2017\_int\_peak = 11.0

Test Date: Oct-2019

Hardware Availability: May-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 648.exchange2\_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_S: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_S: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 10.8

SPECspeed®2017\_int\_peak = 11.0

Test Date: Oct-2019

Hardware Availability: May-2019

Software Availability: May-2019

## Base Portability Flags (Continued)

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/jet5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 10.8

SPECspeed®2017\_int\_peak = 11.0

Test Date: Oct-2019

Hardware Availability: May-2019

Software Availability: May-2019

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
631.deepsjeng_s: Same as 623.xalancbmk_s
```

```
641.leela_s: Same as 623.xalancbmk_s
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-I  
(X11SCL-F , Intel Xeon E-2226G)

SPECspeed®2017\_int\_base = 10.8

SPECspeed®2017\_int\_peak = 11.0

**CPU2017 License:** 001176

**Test Date:** Oct-2019

**Test Sponsor:** Supermicro

**Hardware Availability:** May-2019

**Tested by:** Supermicro

**Software Availability:** May-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-30 22:05:12-0400.

Report generated on 2020-01-08 12:06:15 by CPU2017 PDF formatter v6255.

Originally published on 2020-01-07.