



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

**SPECrate®2017\_int\_base = 540**

**SPECrate®2017\_int\_peak = 562**

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

**Test Date:** Jan-2020

**Hardware Availability:** Oct-2019

**Software Availability:** May-2019

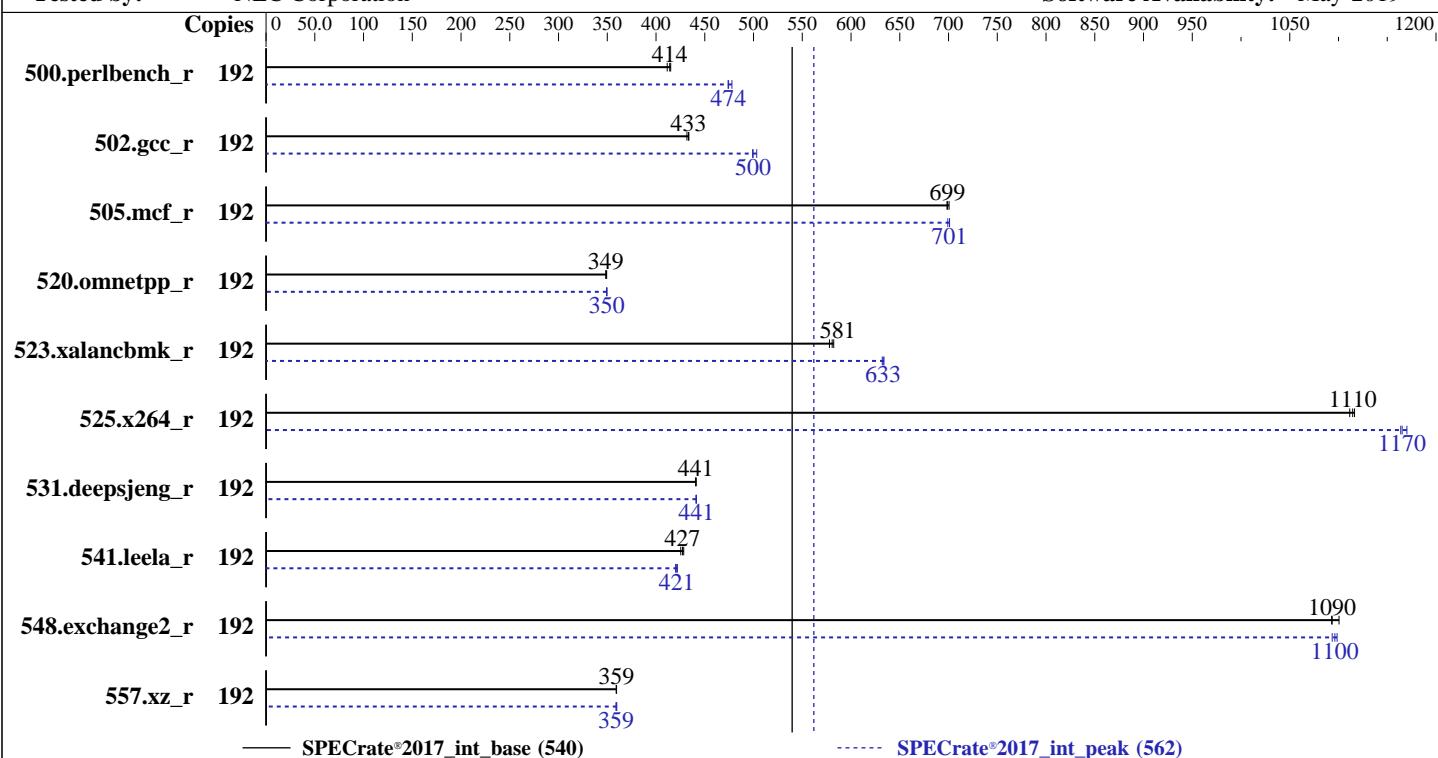

Hardware	
CPU Name:	Intel Xeon Platinum 8260
Max MHz:	3900
Nominal:	2400
Enabled:	96 cores, 4 chips, 2 threads/core
Orderable:	2,3,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	800 GB tmpfs
Other:	None

Software	
OS:	Red Hat Enterprise Linux Server release 7.6 (Maipo)
Compiler:	Kernel 3.10.0-957.10.1.el7.x86_64 C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Parallel:	Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Firmware:	No
File System:	NEC BIOS Version 5.7.0210 08/27/2019 released Oct-2019
System State:	tmpfs
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	64-bit
Other:	32/64-bit
Power Management:	jemalloc memory allocator V5.0.1 BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

**SPECrate®2017\_int\_base = 540**

**SPECrate®2017\_int\_peak = 562**

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	743	411	736	415	<b>738</b>	<b>414</b>	192	<b>644</b>	<b>474</b>	640	478	645	474		
502.gcc_r	192	<b>627</b>	<b>433</b>	630	432	627	434	192	540	503	<b>544</b>	<b>500</b>	545	499		
505.mcf_r	192	443	701	<b>444</b>	<b>699</b>	444	698	192	443	701	<b>443</b>	<b>701</b>	444	699		
520.omnetpp_r	192	723	349	<b>723</b>	<b>349</b>	721	349	192	<b>721</b>	<b>350</b>	721	349	721	350		
523.xalancbmk_r	192	<b>349</b>	<b>581</b>	348	582	351	578	192	<b>320</b>	<b>633</b>	321	632	320	634		
525.x264_r	192	301	1120	<b>302</b>	<b>1110</b>	302	1110	192	<b>289</b>	<b>1170</b>	287	1170	289	1160		
531.deepsjeng_r	192	499	441	<b>499</b>	<b>441</b>	499	441	192	498	441	<b>499</b>	<b>441</b>	499	441		
541.leela_r	192	<b>744</b>	<b>427</b>	748	425	742	428	192	<b>757</b>	420	<b>755</b>	<b>421</b>	754	422		
548.exchange2_r	192	460	1090	457	1100	<b>460</b>	<b>1090</b>	192	460	1090	458	1100	<b>459</b>	<b>1100</b>		
557.xz_r	192	577	359	<b>577</b>	<b>359</b>	577	360	192	577	359	576	360	<b>577</b>	<b>359</b>		

**SPECrate®2017\_int\_base = 540**

**SPECrate®2017\_int\_peak = 562**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
cpupower -c all frequency-set -g performance
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Set Kernel Boot Parameter : nohz_full=1-31
irqbalance disabled with "service irqbalance stop"
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/SPEC/lib/intel64:/home/SPEC/lib/ia32:/home/SPEC/je5.0.1-32"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECrate®2017\_int\_base = 540

SPECrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Memory RAS Mode: SDDC mode

VT-x : Disabled

Processor C6 Report : Disabled

OS Performance Tuning : Disabled

Energy Performance : Performance

Patrol Scrub : Disabled

DCU Streamer Prefetcher : Disabled

Memory P.E. Retry : Disabled

Sub NUMA Clustering : Enabled

Turbo Boost : Enabled

Sysinfo program /home/SPEC/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011

running on localhost.localdomain Sat Jan 25 01:22:03 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

**SPECrate®2017\_int\_base = 540**

**SPECrate®2017\_int\_peak = 562**

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

## Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 22 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
Stepping: 6
CPU MHz: 2401.000
CPU max MHz: 2401.0000
CPU min MHz: 1000.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20,96-99,103-105,109-111,115,116
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23,100-102,106-108,112-114,117-119
NUMA node2 CPU(s): 24-27,31,32,36-38,42-44,120-123,127,128,132-134,138-140
NUMA node3 CPU(s): 28-30,33-35,39-41,45-47,124-126,129-131,135-137,141-143
NUMA node4 CPU(s): 48-51,55,56,60-62,66-68,144-147,151,152,156-158,162-164
NUMA node5 CPU(s): 52-54,57-59,63-65,69-71,148-150,153-155,159-161,165-167
NUMA node6 CPU(s): 72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
NUMA node7 CPU(s): 76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECCrate®2017\_int\_base = 540

SPECCrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

## Platform Notes (Continued)

```
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_ll1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 96 97 98 99 103 104 105 109 110 111 115 116
node 0 size: 195209 MB
node 0 free: 190407 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 100 101 102 106 107 108 112 113 114 117
118 119
node 1 size: 196608 MB
node 1 free: 191403 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 120 121 122 123 127 128 132 133 134
138 139 140
node 2 size: 196608 MB
node 2 free: 192157 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 124 125 126 129 130 131 135 136 137
141 142 143
node 3 size: 196608 MB
node 3 free: 191671 MB
node 4 cpus: 48 49 50 51 55 56 60 61 62 66 67 68 144 145 146 147 151 152 156 157 158
162 163 164
node 4 size: 196608 MB
node 4 free: 192211 MB
node 5 cpus: 52 53 54 57 58 59 63 64 65 69 70 71 148 149 150 153 154 155 159 160 161
165 166 167
node 5 size: 196608 MB
node 5 free: 189772 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
183 187 188
node 6 size: 196608 MB
node 6 free: 192200 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
189 190 191
node 7 size: 196608 MB
node 7 free: 191544 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 15 15 15 15 15 15
 1: 11 10 15 15 15 15 15 15
 2: 15 15 10 11 15 15 15 15
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECrate®2017\_int\_base = 540

SPECrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

## Platform Notes (Continued)

```
3: 15 15 11 10 15 15 15 15  
4: 15 15 15 15 10 11 15 15  
5: 15 15 15 15 11 10 15 15  
6: 15 15 15 15 15 15 10 11  
7: 15 15 15 15 15 15 11 10
```

From /proc/meminfo

```
MemTotal: 1583657940 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.6 (Maipo)"  
ID="rhel"  
ID_LIKE="fedora"  
VARIANT="Server"  
VARIANT_ID="server"  
VERSION_ID="7.6"  
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"  
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-957.10.1.el7.x86_64 #1 SMP Thu Feb 7 07:12:53 UTC  
2019 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS

run-level 3 Jan 25 00:04

SPEC is set to: /home/SPEC

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	800G	4.2G	796G	1%	/home

From /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECCrate®2017\_int\_base = 540

SPECCrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

## Platform Notes (Continued)

BIOS: American Megatrends Inc. 5.7.0210 08/27/2019

Vendor: NEC

Product: NX7700x/A5012M-4 v2 [NE3400-401Y]

Serial: 7800115

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 502.gcc\_r(peak)

-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECrate®2017\_int\_base = 540

SPECrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

## Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 523.xalancbmk\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 523.xalancbmk\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECrate®2017\_int\_base = 540

SPECrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2020

Hardware Availability: Oct-2019

Software Availability: May-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECrate®2017\_int\_base = 540

SPECrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2020

Hardware Availability: Oct-2019

Software Availability: May-2019

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECrate®2017\_int\_base = 540

SPECrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-CLX-A5012M-4-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-CLX-A5012M-4-RevC.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

NX7700x/A5012M-4 v2  
(Intel Xeon Platinum 8260, 2.40GHz)

SPECrate®2017\_int\_base = 540

SPECrate®2017\_int\_peak = 562

CPU2017 License: 9006

Test Date: Jan-2020

Test Sponsor: NEC Corporation

Hardware Availability: Oct-2019

Tested by: NEC Corporation

Software Availability: May-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-24 11:22:02-0500.

Report generated on 2020-04-14 14:10:21 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.