



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro


SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

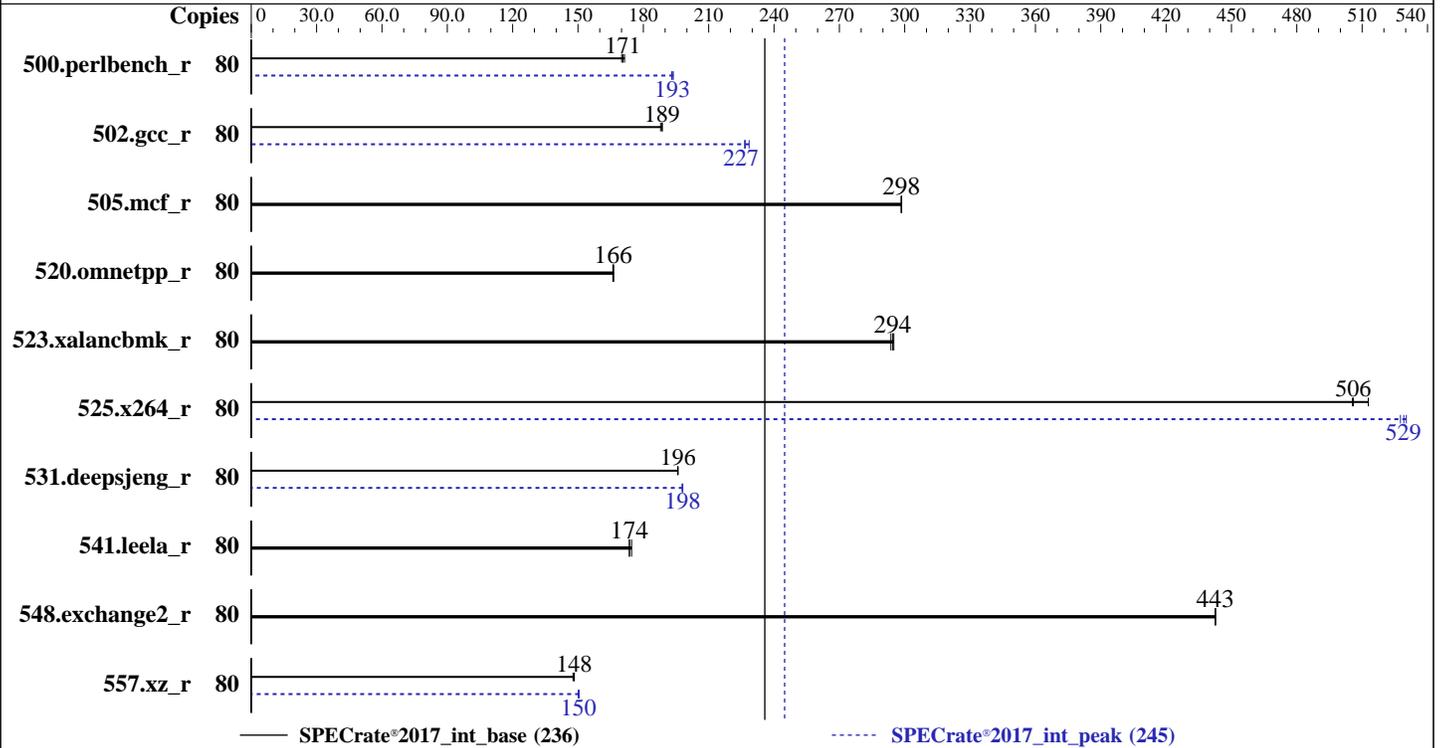

Hardware

CPU Name: Intel Xeon Gold 5218R
 Max MHz: 4000
 Nominal: 2100
 Enabled: 40 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
 Storage: 1 x 200 GB SATA III SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.1
 Kernel 4.18.0-147.el8.x86_64
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 3.3 released Feb-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	749	170	<u>746</u>	<u>171</u>	743	171	80	<u>659</u>	<u>193</u>	660	193	657	194
502.gcc_r	80	603	188	<u>601</u>	<u>189</u>	600	189	80	496	229	<u>499</u>	<u>227</u>	500	226
505.mcf_r	80	433	298	<u>433</u>	<u>298</u>	433	299	80	433	298	<u>433</u>	<u>298</u>	433	299
520.omnetpp_r	80	<u>632</u>	<u>166</u>	631	166	632	166	80	<u>632</u>	<u>166</u>	631	166	632	166
523.xalancbmk_r	80	286	295	<u>287</u>	<u>294</u>	288	294	80	286	295	<u>287</u>	<u>294</u>	288	294
525.x264_r	80	<u>277</u>	<u>506</u>	277	506	273	513	80	264	530	<u>265</u>	<u>529</u>	266	528
531.deepsjeng_r	80	468	196	468	196	<u>468</u>	<u>196</u>	80	<u>463</u>	<u>198</u>	463	198	464	198
541.leela_r	80	759	175	<u>763</u>	<u>174</u>	763	174	80	759	175	<u>763</u>	<u>174</u>	763	174
548.exchange2_r	80	474	443	473	443	<u>474</u>	<u>443</u>	80	474	443	473	443	<u>474</u>	<u>443</u>
557.xz_r	80	585	148	582	148	<u>583</u>	<u>148</u>	80	574	151	575	150	<u>575</u>	<u>150</u>

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Extreme Performance

SNC = Enable

Stale AtoS = Disable

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on RHEL81-01 Thu Apr 23 10:58:57 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Platform Notes (Continued)

```

Byte Order:           Little Endian
CPU(s):               80
On-line CPU(s) list: 0-79
Thread(s) per core:  2
Core(s) per socket:  20
Socket(s):            2
NUMA node(s):        4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
Stepping:             7
CPU MHz:              2899.850
CPU max MHz:          4000.0000
CPU min MHz:          800.0000
BogoMIPS:             4200.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             28160K
NUMA node0 CPU(s):   0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s):   3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s):   20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s):   23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 192117 MB
node 0 free: 191820 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Platform Notes (Continued)

```

node 1 size: 193506 MB
node 1 free: 192227 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 193531 MB
node 2 free: 193322 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 193531 MB
node 3 free: 193324 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

```

From /proc/meminfo
MemTotal:      791231140 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
  redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
  system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

```

```

uname -a:
Linux RHEL81-01 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swaps barriers and __user
pointer sanitization

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Apr 23 10:46

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	185G	13G	173G	7%	/

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 3.3 02/21/2020
Vendor: Supermicro
Product: Super Server
Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x SK Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Base Portability Flags (Continued)

525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto  
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto -mfpmath=sse  
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -flto -O3
-ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029U-TR4
(X11DPU , Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 236

SPECrate®2017_int_peak = 245

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

```
531.deepsjeng_r: -m64 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revF.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revF.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-22 22:58:56-0400.

Report generated on 2020-05-12 14:59:04 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-12.