



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 103

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55


Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

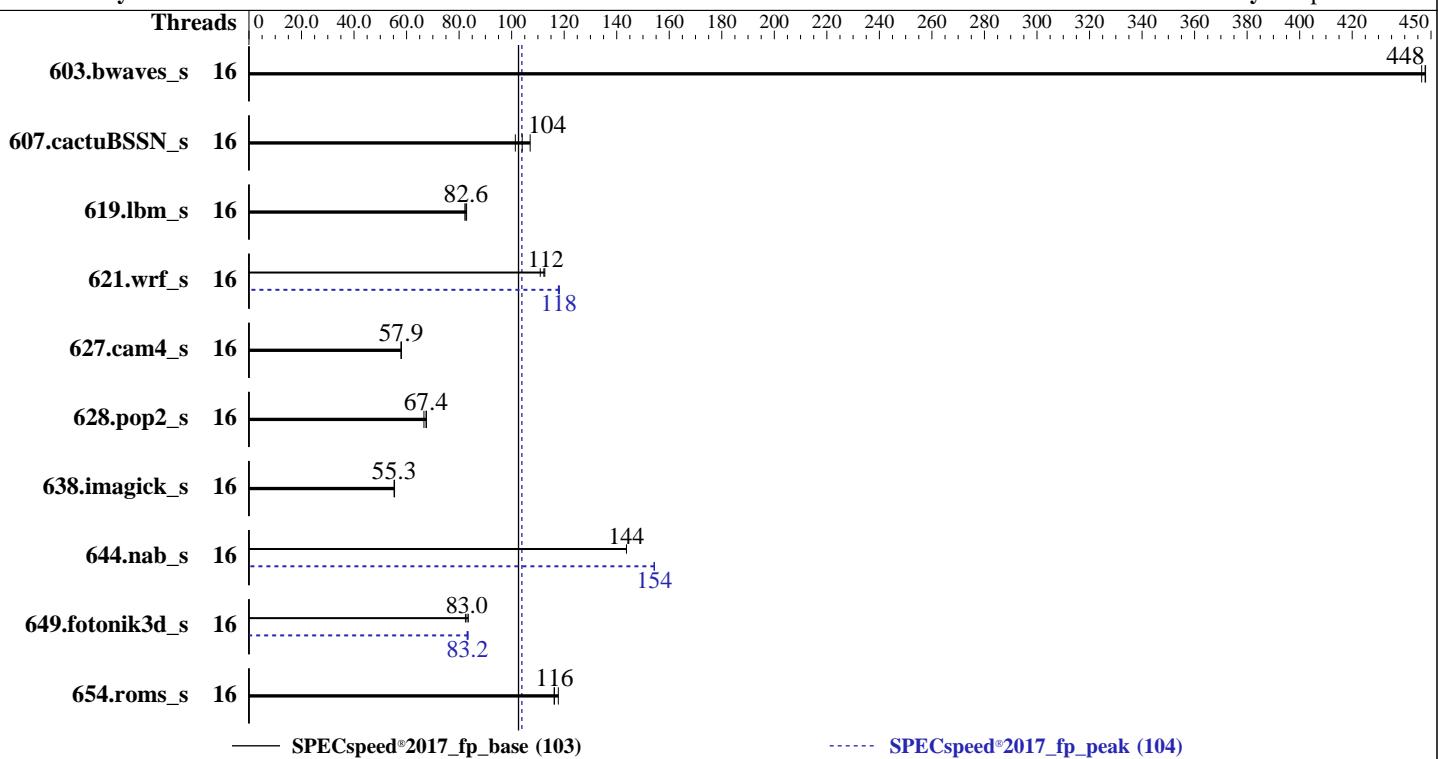

Hardware

CPU Name: Intel Xeon Gold 6250
 Max MHz: 4500
 Nominal: 3900
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933V-R,
 running at 2933)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.1
 Compiler: kernel 4.18.0-147.el8.x86_64
 C/C++: Version 19.1.1.217 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: Version 2.7.7 released May-2020
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: jemalloc memory allocator V5.0.1
BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 103

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	132	446	132	448	<u>132</u>	<u>448</u>	16	132	446	132	448	<u>132</u>	<u>448</u>
607.cactuBSSN_s	16	164	101	156	107	<u>160</u>	<u>104</u>	16	164	101	156	107	<u>160</u>	<u>104</u>
619.lbm_s	16	<u>63.4</u>	<u>82.6</u>	63.7	82.2	63.2	82.9	16	<u>63.4</u>	<u>82.6</u>	63.7	82.2	<u>63.2</u>	82.9
621.wrf_s	16	119	111	117	113	<u>118</u>	<u>112</u>	16	<u>112</u>	<u>118</u>	112	118	112	118
627.cam4_s	16	153	57.9	<u>153</u>	<u>57.9</u>	153	58.1	16	153	57.9	<u>153</u>	<u>57.9</u>	153	58.1
628.pop2_s	16	<u>176</u>	<u>67.4</u>	176	67.6	178	66.6	16	<u>176</u>	<u>67.4</u>	176	67.6	178	66.6
638.imagick_s	16	261	55.3	<u>261</u>	<u>55.3</u>	260	55.4	16	261	55.3	<u>261</u>	<u>55.3</u>	260	55.4
644.nab_s	16	<u>122</u>	<u>144</u>	122	144	122	144	16	<u>113</u>	<u>154</u>	113	154	113	154
649.fotonik3d_s	16	109	83.5	<u>110</u>	<u>83.0</u>	111	82.4	16	109	83.4	110	83.0	<u>110</u>	<u>83.2</u>
654.roms_s	16	<u>135</u>	<u>116</u>	134	118	136	116	16	<u>135</u>	<u>116</u>	134	118	136	116
SPECSpeed®2017_fp_base = 103							SPECSpeed®2017_fp_peak = 104							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-ic19.1u1/lib/intel64:/mnt/ramdisk/cpu2017-ic19.1u1
    /je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 103

PowerEdge R640 (Intel Xeon Gold 6250, 3.90 GHz)

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55

Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

General Notes (Continued)

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk" jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

Sub NUMA Cluster disabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

Logical Processor disabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

UPI Prefetch disabled

LLC Prefetch disabled

Dead Line LLC Alloc enabled

Directory AtoS disabled

Sysinfo program /mnt/ramdisk/cpu2017-ic19.1u1/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on rhel-8-1-sut Tue Jun 2 13:52:32 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6250 CPU @ 3.90GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 3 6 10 12 13 21 24

physical 1: cores 1 2 10 12 13 17 19 29

From lscpu:

Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 103

PowerEdge R640 (Intel Xeon Gold 6250, 3.90 GHz)

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55

Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6250 CPU @ 3.90GHz
Stepping: 7
CPU MHz: 1271.380
CPU max MHz: 4500.0000
CPU min MHz: 1200.0000
BogoMIPS: 7800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpk rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14
node 0 size: 192050 MB
node 0 free: 182629 MB
node 1 cpus: 1 3 5 7 9 11 13 15

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 103

PowerEdge R640 (Intel Xeon Gold 6250, 3.90 GHz)

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55

Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

Platform Notes (Continued)

```
node 1 size: 193533 MB
node 1 free: 186627 MB
node distances:
node   0   1
 0: 10 21
 1: 21 10

From /proc/meminfo
MemTotal:      394837836 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:
Linux rhel-8-1-sut 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:           Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swapgs barriers and __user
                                              pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
                                              RSB filling

run-level 3 Jun 2 10:08 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-ic19.lul
Filesystem      Type    Size  Used Avail Use% Mounted on
tmpfs          tmpfs   150G   11G  140G   7% /mnt/ramdisk
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 103

PowerEdge R640 (Intel Xeon Gold 6250, 3.90 GHz)

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55

Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 2.7.7 05/04/2020
Vendor: Dell Inc.
Product: PowerEdge R640
Product Family: PowerEdge
Serial: FPFXCH2

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x 002C069D002C 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
4x 00AD00B300AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
8x 00AD00B300AD HMA82GR7CJR8N-XN 16 GB 2 rank 3200
2x 00AD063200AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 103

PowerEdge R640 (Intel Xeon Gold 6250, 3.90 GHz)

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55

Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

Compiler Version Notes (Continued)

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R640 (Intel Xeon Gold 6250, 3.90 GHz)

SPECSpeed®2017_fp_base = 103

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

Base Portability Flags (Continued)

```
638.imagick_s: -DSPEC_LP64  
644.nab_s: -DSPEC_LP64  
649.fotonik3d_s: -DSPEC_LP64  
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs  
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R640 (Intel Xeon Gold 6250, 3.90 GHz)

SPECSpeed®2017_fp_base = 103

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 103

PowerEdge R640 (Intel Xeon Gold 6250, 3.90 GHz)

SPECSpeed®2017_fp_peak = 104

CPU2017 License: 55

Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactusBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.l1l-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.l1l-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-02 14:52:31-0400.

Report generated on 2020-06-23 18:08:27 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.