



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97


Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

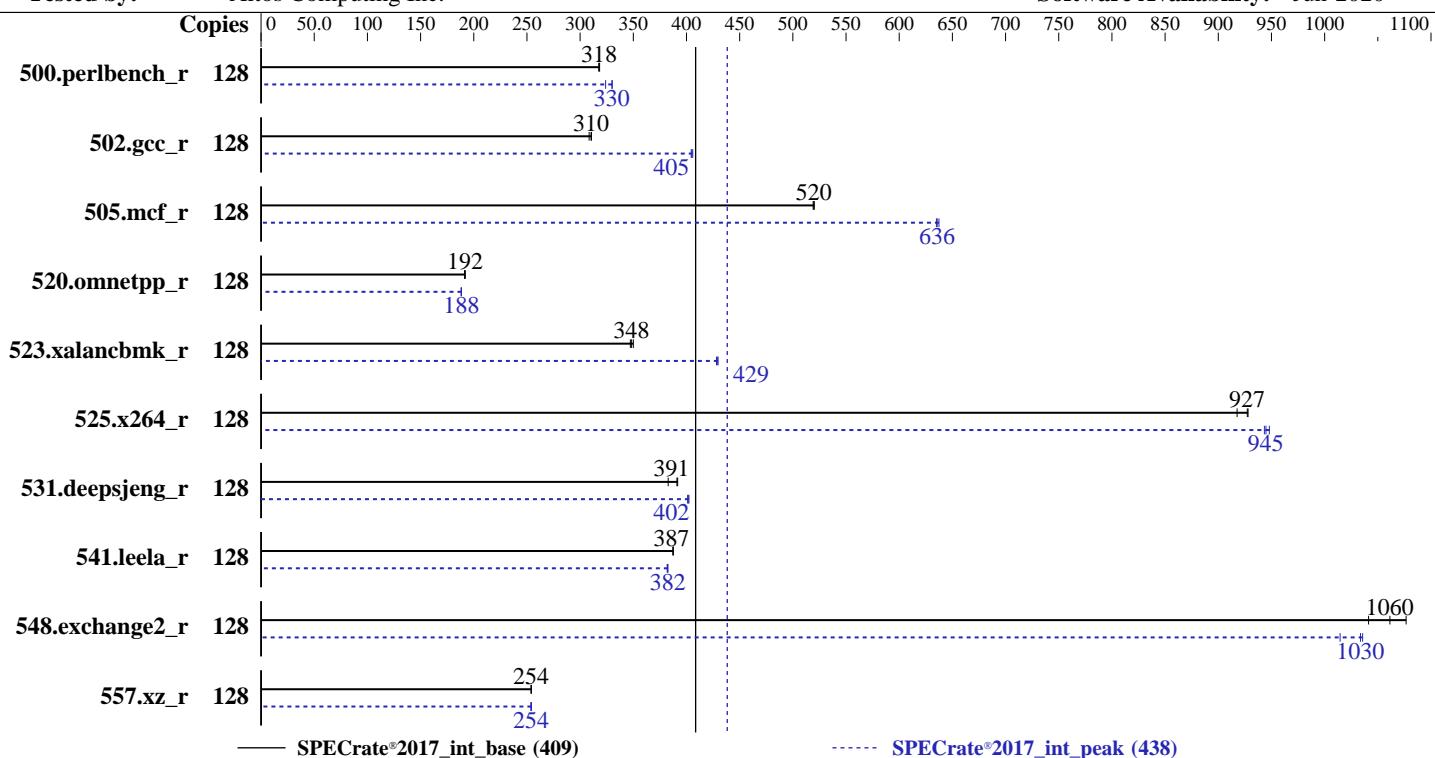

Hardware

CPU Name: AMD EPYC 7502
 Max MHz: 3350
 Nominal: 2500
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 1.6 TB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86_64)
 Kernel 4.12.14-197.45-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version R11 released Oct-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|-----------------|--------|------------|------------|------------|------------|------------|-------------|--------|------------|------------|------------|-------------|------------|------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 128 | 640 | 318 | 641 | 318 | 642 | 318 | 128 | 629 | 324 | 617 | 330 | 618 | 330 | | |
| 502.gcc_r | 128 | 584 | 310 | 583 | 311 | 588 | 308 | 128 | 448 | 404 | 448 | 405 | 447 | 406 | | |
| 505.mcf_r | 128 | 398 | 519 | 398 | 520 | 398 | 520 | 128 | 325 | 636 | 326 | 635 | 325 | 637 | | |
| 520.omnetpp_r | 128 | 876 | 192 | 878 | 191 | 875 | 192 | 128 | 893 | 188 | 891 | 188 | 892 | 188 | | |
| 523.xalancbmk_r | 128 | 386 | 350 | 389 | 347 | 388 | 348 | 128 | 315 | 429 | 316 | 428 | 315 | 430 | | |
| 525.x264_r | 128 | 244 | 918 | 242 | 928 | 242 | 927 | 128 | 237 | 945 | 236 | 948 | 238 | 943 | | |
| 531.deepsjeng_r | 128 | 375 | 391 | 374 | 392 | 383 | 383 | 128 | 365 | 402 | 366 | 401 | 365 | 402 | | |
| 541.leela_r | 128 | 547 | 387 | 547 | 387 | 547 | 387 | 128 | 554 | 382 | 555 | 382 | 554 | 382 | | |
| 548.exchange2_r | 128 | 311 | 1080 | 322 | 1040 | 316 | 1060 | 128 | 324 | 1040 | 324 | 1030 | 331 | 1010 | | |
| 557.xz_r | 128 | 544 | 254 | 544 | 254 | 544 | 254 | 128 | 545 | 254 | 544 | 254 | 544 | 254 | | |

SPECrate®2017_int_base = 409

SPECrate®2017_int_peak = 438

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
 Set swappiness=1 to swap only if necessary
 Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc200_rome_C_lib/64;/home/cpu2017/amd_rate_aoc
    c200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fno-jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Configuration:

Power Policy Quick Settings set to Best Performance

NUMA Nodes Per Socket set to NPS4

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-eq08 Tue Jun 23 02:24:16 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7502 32-Core Processor
  2 "physical id"s (chips)
  128 "processors"
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 32
siblings   : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):           8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7502 32-Core Processor
Stepping:                0
CPU MHz:                2500.000
CPU max MHz:            2500.0000
CPU min MHz:            1500.0000
BogoMIPS:                4999.98
Virtualization:         AMD-V
L1d cache:               32K
L1i cache:               32K
L2 cache:                512K
L3 cache:                16384K
NUMA node0 CPU(s):      0-7,64-71
NUMA node1 CPU(s):      8-15,72-79
NUMA node2 CPU(s):      16-23,80-87
NUMA node3 CPU(s):      24-31,88-95
NUMA node4 CPU(s):      32-39,96-103
NUMA node5 CPU(s):      40-47,104-111
NUMA node6 CPU(s):      48-55,112-119
NUMA node7 CPU(s):      56-63,120-127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Platform Notes (Continued)

```
skinit watchdog tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3
cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
cqmq_rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmlload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 64220 MB
node 0 free: 63952 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 64505 MB
node 1 free: 64207 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 64505 MB
node 2 free: 64320 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 64493 MB
node 3 free: 64349 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 64505 MB
node 4 free: 64354 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 64505 MB
node 5 free: 64363 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 64505 MB
node 6 free: 64365 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 64287 MB
node 7 free: 64152 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      527901660 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-eq08 4.12.14-197.45-default #1 SMP Thu Jun 4 11:06:04 UTC 2020 (2b6c749)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

| | |
|---|--|
| itlb_multihit: | Not affected |
| CVE-2018-3620 (L1 Terminal Fault): | Not affected |
| Microarchitectural Data Sampling: | Not affected |
| CVE-2017-5754 (Meltdown): | Not affected |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl and seccomp |
| CVE-2017-5753 (Spectre variant 1): | Mitigation: usercopy/swapgs barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2): | Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling |
| srbd: | Not affected |
| tsx_async_abort: | Not affected |

run-level 3 Jun 23 02:16 last=5

SPEC is set to: /home/cpu2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda3 | xfs | 946G | 6.9G | 939G | 1% | /home |

From /sys/devices/virtual/dmi/id

```
BIOS:      GIGABYTE R11 10/25/2019
Vendor:    Acer
Product:   Altos R365 F4
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Platform Notes (Continued)

Product Family: Server

Serial: DJ7002921A0002

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE 32 kB 2 rank 3200

16x Unknown Unknown

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C | 502.gcc_r(peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Compiler Version Notes (Continued)

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++ | 523.xalancbmk_r(peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++ | 523.xalancbmk_r(peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Compiler Version Notes (Continued)

AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran | 548.exchange2_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins

AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Base Optimization Flags

C benchmarks:

```
-floop -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc  
-lflang
```

C++ benchmarks:

```
-floop -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-floop -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECRate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECRate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Peak Optimization Flags (Continued)

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-fLv-function-specialization -lmvec -lamdlibm -ljemalloc  
-lflang
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -fLv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc  
-lflang
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -fLv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Altos Computing Inc.

SPECrate®2017_int_base = 409

BrainSphere R385 F4 (AMD EPYC 7502)

SPECrate®2017_int_peak = 438

CPU2017 License: 97

Test Date: Jun-2020

Test Sponsor: Altos Computing Inc.

Hardware Availability: Dec-2019

Tested by: Altos Computing Inc.

Software Availability: Jun-2020

Peak Optimization Flags (Continued)

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

502.gcc_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

C++ benchmarks:

523.xalancbmk_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Altos-Platform-Settings-V1.0-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-22 14:24:16-0400.

Report generated on 2020-07-07 14:39:21 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-07.