



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6240L)

**SPECspeed®2017\_int\_base = 11.0**

**SPECspeed®2017\_int\_peak = Not Run**

CPU2017 License: 001176


**Test Date:** Oct-2020

Test Sponsor: Supermicro

**Hardware Availability:** Feb-2020

Tested by: Supermicro

**Software Availability:** Apr-2020

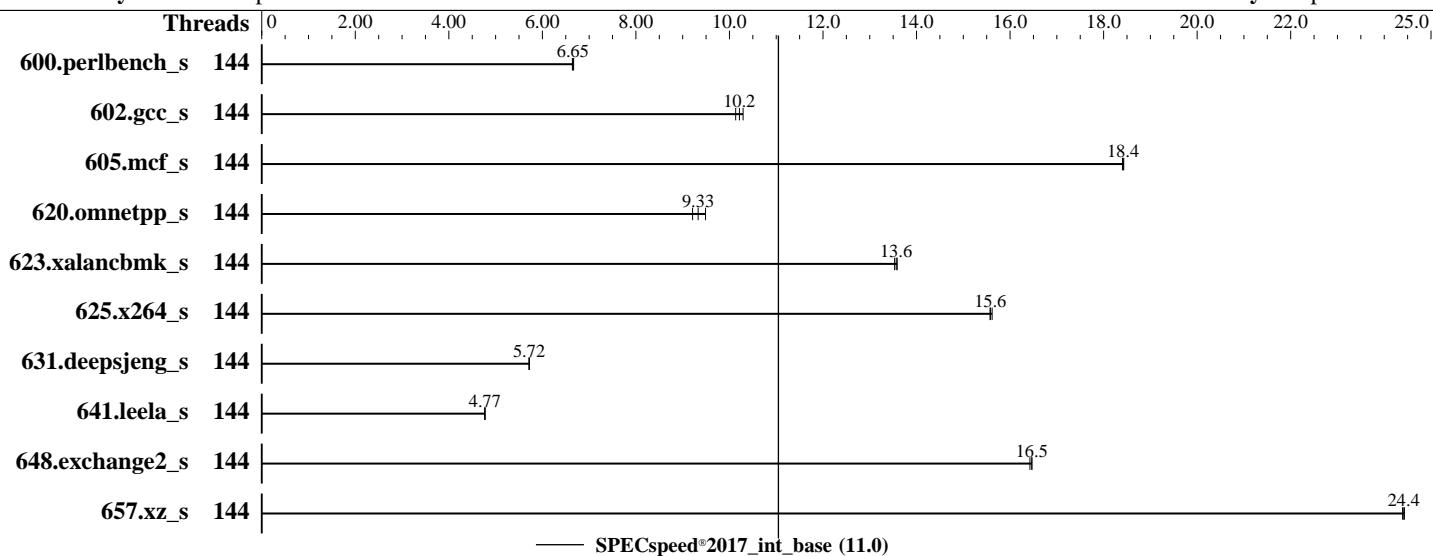

### Hardware

CPU Name: Intel Xeon Gold 6240L  
Max MHz: 3900  
Nominal: 2600  
Enabled: 72 cores, 4 chips, 2 threads/core  
Orderable: 1,2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 24.75 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)  
Storage: 800 GB SATA 3 SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86\_64  
Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: version 3.3a released Jul-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to max performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6240L)

SPECspeed®2017\_int\_base = 11.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Oct-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	144	<b>267</b>	<b>6.65</b>	266	6.67	267	6.64							
602.gcc_s	144	<b>390</b>	<b>10.2</b>	393	10.1	387	10.3							
605.mcf_s	144	256	18.4	<b>256</b>	<b>18.4</b>	257	18.4							
620.omnetpp_s	144	172	9.49	177	9.21	<b>175</b>	<b>9.33</b>							
623.xalancbmk_s	144	104	13.6	<b>104</b>	<b>13.6</b>	105	13.5							
625.x264_s	144	<b>113</b>	<b>15.6</b>	113	15.6	113	15.6							
631.deepsjeng_s	144	<b>251</b>	<b>5.72</b>	251	5.72	250	5.72							
641.leela_s	144	358	4.77	357	4.77	<b>357</b>	<b>4.77</b>							
648.exchange2_s	144	179	16.4	<b>179</b>	<b>16.5</b>	179	16.5							
657.xz_s	144	253	24.4	<b>253</b>	<b>24.4</b>	253	24.4							

SPECspeed®2017\_int\_base = 11.0

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.  
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6240L)

SPECspeed®2017\_int\_base = 11.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Oct-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Apr-2020

## General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance

Super Performance = Enable

Stale AtoS = Enable

Patrol Scrub = Disable

Intel Virtualization Technology = Disable

SNC = Disable

LLC Dead Line Alloc = Disable

Enhanced Halt State (C1E) = Disable

IMC Interleaving = 1-way Interleave

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on 142-39.pnet Thu Oct 15 16:09:05 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6240L CPU @ 2.60GHz

4 "physical id"s (chips)

144 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6240L)

SPECspeed®2017\_int\_base = 11.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Oct-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Apr-2020

## Platform Notes (Continued)

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                144
On-line CPU(s) list:   0-143
Thread(s) per core:    2
Core(s) per socket:    18
Socket(s):              4
NUMA node(s):           4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Gold 6240L CPU @ 2.60GHz
Stepping:               7
CPU MHz:                1798.862
CPU max MHz:            3900.0000
CPU min MHz:            1000.0000
BogoMIPS:               5200.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                25344K
NUMA node0 CPU(s):      0-17,72-89
NUMA node1 CPU(s):      18-35,90-107
NUMA node2 CPU(s):      36-53,108-125
NUMA node3 CPU(s):      54-71,126-143
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
                        aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
                        invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
                        cqmq mpq rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occu_llc cqmq_mbmb_total
                        cqmq_mbmb_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
                        arch_capabilities
```

/proc/cpuinfo cache data  
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6240L)

SPECspeed®2017\_int\_base = 11.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Oct-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Apr-2020

## Platform Notes (Continued)

```
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 72 73 74 75 76 77 78 79 80 81
82 83 84 85 86 87 88 89
node 0 size: 257634 MB
node 0 free: 257195 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 90 91 92 93 94 95 96
97 98 99 100 101 102 103 104 105 106 107
node 1 size: 387036 MB
node 1 free: 386837 MB
node 2 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 108 109 110 111 112
113 114 115 116 117 118 119 120 121 122 123 124 125
node 2 size: 387063 MB
node 2 free: 386332 MB
node 3 cpus: 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 126 127 128 129 130
131 132 133 134 135 136 137 138 139 140 141 142 143
node 3 size: 387061 MB
node 3 free: 386851 MB
node distances:
node 0 1 2 3
 0: 10 21 21 21
 1: 21 10 21 21
 2: 21 21 10 21
 3: 21 21 21 10
```

```
From /proc/meminfo
MemTotal: 1452846936 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux 142-39.pnet 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6240L)

SPECspeed®2017\_int\_base = 11.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Oct-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Apr-2020

## Platform Notes (Continued)

itlb_multihit:	KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
tsx_async_abort:	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Oct 15 15:27

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	690G	55G	636G	8%	/home

From /sys/devices/virtual/dmi/id

BIOS:	American Megatrends Inc.	3.3a	07/23/2020
Vendor:	Supermicro		
Product:	X11QPH+		
Product Family:	SMC X11		
Serial:	123456789		

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x Samsung M393A4K40DB3-CWE	2 rank	3200	
44x Samsung M393A4K40DB3-CWE	32 GB	2 rank	3200

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
	625.x264_s(base) 657.xz_s(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6240L)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 11.0

SPECspeed®2017\_int\_peak = Not Run

Test Date: Oct-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

```
=====
C++      | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
          | 641.leela_s(base)
-----
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 648.exchange2_s(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2049U-TR4  
(X11QPH+, Intel Xeon Gold 6240L)

SPECspeed®2017\_int\_base = 11.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX512
-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-15 19:09:04-0400.

Report generated on 2020-11-10 15:18:51 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-10.