



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280


(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

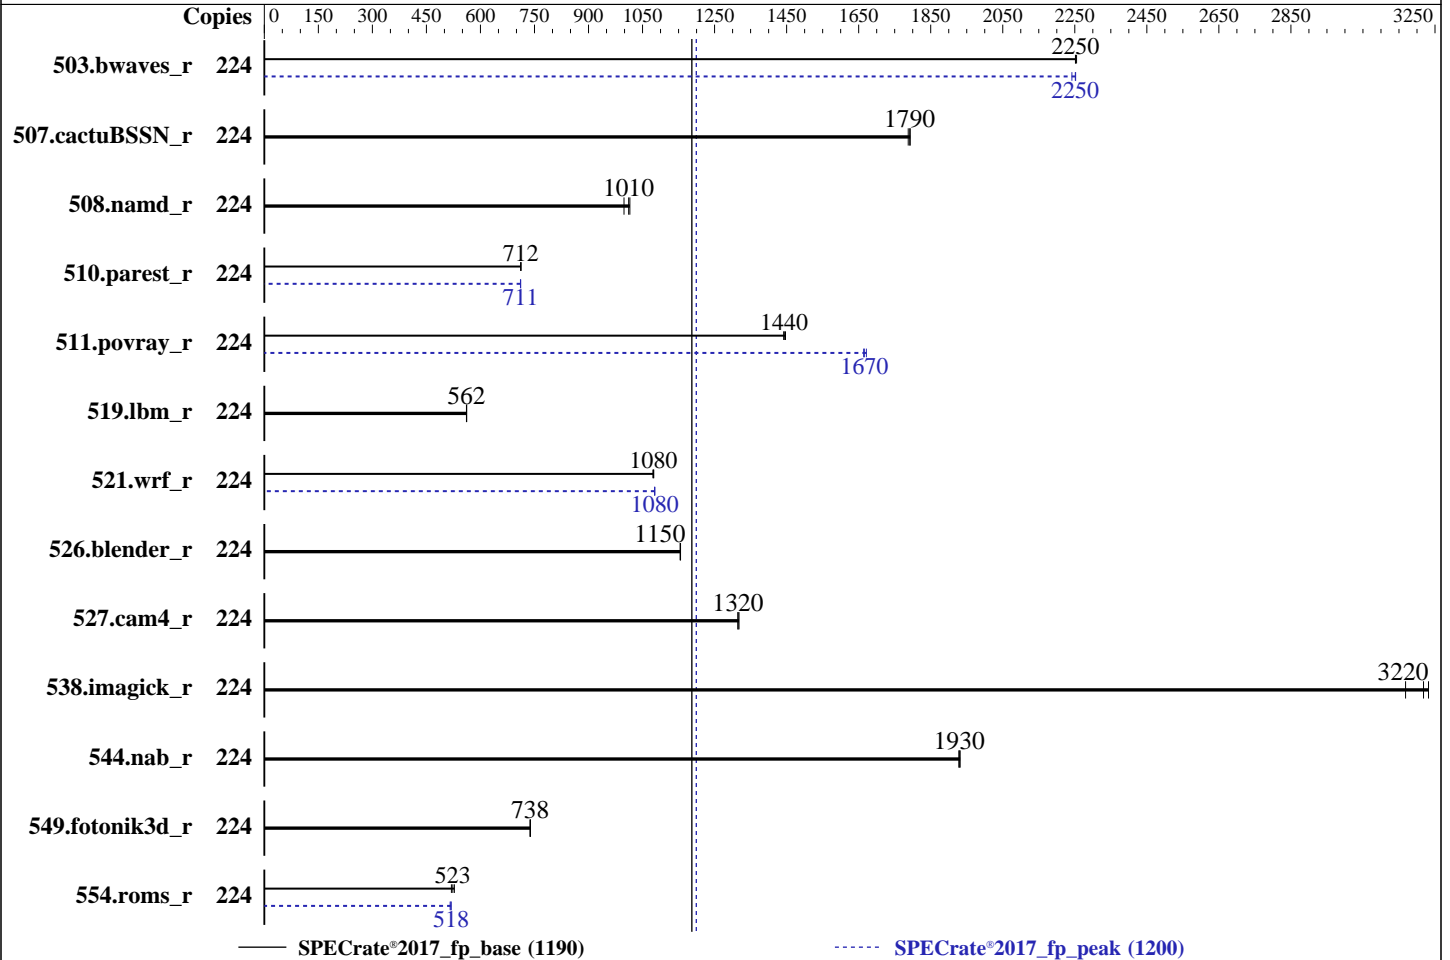

Hardware

CPU Name: Intel Xeon Platinum 8376HL
 Max MHz: 4300
 Nominal: 2600
 Enabled: 224 cores, 8 chips
 Orderable: 2, 4, 8 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 6 TB (48 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 2 x 480 GB SSD SATA
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa)
 Kernel 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++
 Compiler Build 20200306 for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran
 Compiler Build 20200306 for Linux;
 Parallel: No
 Firmware: HPE Firmware Bundle Version 1.0.142 released Oct-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 HPE Foundation Software 2.4,
 Build 734.0820.200723T0100.a.rhel82hpe-200723T0100
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	996	2250	998	2250	997	2250	224	998	2250	997	2250	1002	2240
507.cactuBSSN_r	224	159	1790	158	1790	158	1790	224	159	1790	158	1790	158	1790
508.namd_r	224	210	1010	213	999	210	1010	224	210	1010	213	999	210	1010
510.parest_r	224	823	712	823	712	823	712	224	824	712	824	711	824	711
511.povray_r	224	362	1450	362	1440	363	1440	224	313	1670	314	1660	314	1670
519.lbm_r	224	420	562	420	562	421	561	224	420	562	420	562	421	561
521.wrf_r	224	464	1080	465	1080	465	1080	224	463	1080	463	1080	463	1080
526.blender_r	224	295	1160	295	1150	295	1150	224	295	1160	295	1150	295	1150
527.cam4_r	224	298	1320	297	1320	298	1310	224	298	1320	297	1320	298	1310
538.imagick_r	224	176	3170	172	3230	173	3220	224	176	3170	172	3230	173	3220
544.nab_r	224	195	1930	196	1930	195	1930	224	195	1930	196	1930	195	1930
549.fotonik3d_r	224	1183	738	1183	738	1182	739	224	1183	738	1183	738	1182	739
554.roms_r	224	685	519	680	523	675	528	224	687	518	687	518	690	516

SPECrate®2017_fp_base = **1190**

SPECrate®2017_fp_peak = **1200**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to HPC
Intel Hyper-Threading set to Disabled
Workload Profile set to Custom
Minimum Processor Idle Power Core C-State set to C6 State
Sub-NUMA Clustering set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on ch-622.fchst.rdlabs.hpccorp.net Tue Nov 3 05:59:14 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8376HL CPU @ 2.60GHz
 8 "physical id"s (chips)
224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Platform Notes (Continued)

```

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 224
On-line CPU(s) list:   0-223
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):              8
NUMA node(s):          16
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8376HL CPU @ 2.60GHz
Stepping:               11
CPU MHz:                3884.734
CPU max MHz:           4300.0000
CPU min MHz:           1000.0000
BogoMIPS:               5199.97
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0-3,7-9,14-17,21-23
NUMA node1 CPU(s):     4-6,10-13,18-20,24-27
NUMA node2 CPU(s):     28-31,35-37,42-45,49-51
NUMA node3 CPU(s):     32-34,38-41,46-48,52-55
NUMA node4 CPU(s):     56-59,63-65,70-73,77-79
NUMA node5 CPU(s):     60-62,66-69,74-76,80-83
NUMA node6 CPU(s):     84-87,91-93,98-101,105-107
NUMA node7 CPU(s):     88-90,94-97,102-104,108-111

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Platform Notes (Continued)

NUMA node8 CPU(s): 112-115,119-121,126-129,133-135
NUMA node9 CPU(s): 116-118,122-125,130-132,136-139
NUMA node10 CPU(s): 140-143,147-149,154-157,161-163
NUMA node11 CPU(s): 144-146,150-153,158-160,164-167
NUMA node12 CPU(s): 168-171,175-177,182-185,189-191
NUMA node13 CPU(s): 172-174,178-181,186-188,192-195
NUMA node14 CPU(s): 196-199,203-205,210-213,217-219
NUMA node15 CPU(s): 200-202,206-209,214-216,220-223

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear
flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23
node 0 size: 385509 MB
node 0 free: 384837 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27
node 1 size: 387068 MB
node 1 free: 386924 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51
node 2 size: 387068 MB
node 2 free: 386932 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55
node 3 size: 387068 MB
node 3 free: 386853 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79
node 4 size: 387040 MB
node 4 free: 386884 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83
node 5 size: 387068 MB
node 5 free: 386855 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107
node 6 size: 387068 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Platform Notes (Continued)

```

node 6 free: 386982 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111
node 7 size: 387068 MB
node 7 free: 386973 MB
node 8 cpus: 112 113 114 115 119 120 121 126 127 128 129 133 134 135
node 8 size: 387068 MB
node 8 free: 386978 MB
node 9 cpus: 116 117 118 122 123 124 125 130 131 132 136 137 138 139
node 9 size: 387068 MB
node 9 free: 386975 MB
node 10 cpus: 140 141 142 143 147 148 149 154 155 156 157 161 162 163
node 10 size: 387068 MB
node 10 free: 386717 MB
node 11 cpus: 144 145 146 150 151 152 153 158 159 160 164 165 166 167
node 11 size: 387068 MB
node 11 free: 386971 MB
node 12 cpus: 168 169 170 171 175 176 177 182 183 184 185 189 190 191
node 12 size: 387068 MB
node 12 free: 386972 MB
node 13 cpus: 172 173 174 178 179 180 181 186 187 188 192 193 194 195
node 13 size: 387068 MB
node 13 free: 386977 MB
node 14 cpus: 196 197 198 199 203 204 205 210 211 212 213 217 218 219
node 14 size: 387068 MB
node 14 free: 386981 MB
node 15 cpus: 200 201 202 206 207 208 209 214 215 216 220 221 222 223
node 15 size: 386036 MB
node 15 free: 385941 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 13 16 16 16 16 24 24 16 16 16 16 16 16 16 16
  1: 13 10 16 16 16 16 24 24 16 16 16 16 16 16 16 16
  2: 16 16 10 13 24 24 16 16 16 16 16 16 16 16 16 16
  3: 16 16 13 10 24 24 16 16 16 16 16 16 16 16 16 16
  4: 16 16 24 24 10 13 16 16 16 16 16 16 16 16 16 16
  5: 16 16 24 24 13 10 16 16 16 16 16 16 16 16 16 16
  6: 24 24 16 16 16 16 10 13 16 16 16 16 16 16 16 16
  7: 24 24 16 16 16 16 13 10 16 16 16 16 16 16 16 16
  8: 16 16 16 16 16 16 16 16 10 13 16 16 16 16 24 24
  9: 16 16 16 16 16 16 16 16 13 10 16 16 16 16 24 24
 10: 16 16 16 16 16 16 16 16 16 16 10 13 24 24 16 16
 11: 16 16 16 16 16 16 16 16 16 16 13 10 24 24 16 16
 12: 16 16 16 16 16 16 16 16 16 16 24 24 10 13 16 16
 13: 16 16 16 16 16 16 16 16 16 16 24 24 13 10 16 16
 14: 16 16 16 16 16 16 16 16 24 24 16 16 16 16 10 13
 15: 16 16 16 16 16 16 16 16 24 24 16 16 16 16 13 10

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 6339047128 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

Red Hat Enterprise Linux release 8.2 (Ootpa)

From /etc/*release* /etc/*version*

hpe-foundation-release: HPE Foundation Software 2.4, Build

734.0820.200723T0100.a.rhel82hpe-200723T0100

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.2"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:

Linux ch-622.fchst.rdlabs.hpecorp.net 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58

UTC 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

tsx_async_abort:

Not affected

run-level 3 Nov 3 05:56

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	392G	263G	130G	67%	/home

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

BIOS: HPE Bundle:1.0.142 SFW:008.000.189.000.2010080501 10/08/2020

Vendor: HPE

Product: Superdome Flex 280

Product Family: 1590PID02020001

Serial: 5UF0090539

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Hynix HMABAGL7ABR4N-XN 128 GB 4 rank 3200

48x NO DIMM NO DIMM

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)  
 | 544.nab_r(base, peak)  
-----
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
-----
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++, C | 511.povray_r(base) 526.blender_r(base, peak)  
-----
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 521.wrf_r(peak)
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

`-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:

`icc`

C++ benchmarks:

`icpc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`ifort icc`

Benchmarks using both C and C++:

`icpc icc`

Benchmarks using Fortran, C, and C++:

`icpc icc ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`519.lbm_r: basepeak = yes`

`538.imagick_r: basepeak = yes`

`544.nab_r: basepeak = yes`

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

510.parest_r: -m64 -qnextgen
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:

503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex 280

(2.60 GHz, Intel Xeon Platinum 8376HL)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1200

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.3-CLX-revC.html>

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.3-CLX-revC.xml>

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-02 19:29:13-0500.

Report generated on 2020-12-08 17:14:26 by CPU2017 PDF formatter v6255.

Originally published on 2020-12-08.