



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2020

Hardware Availability: Nov-2020

Software Availability: Aug-2020

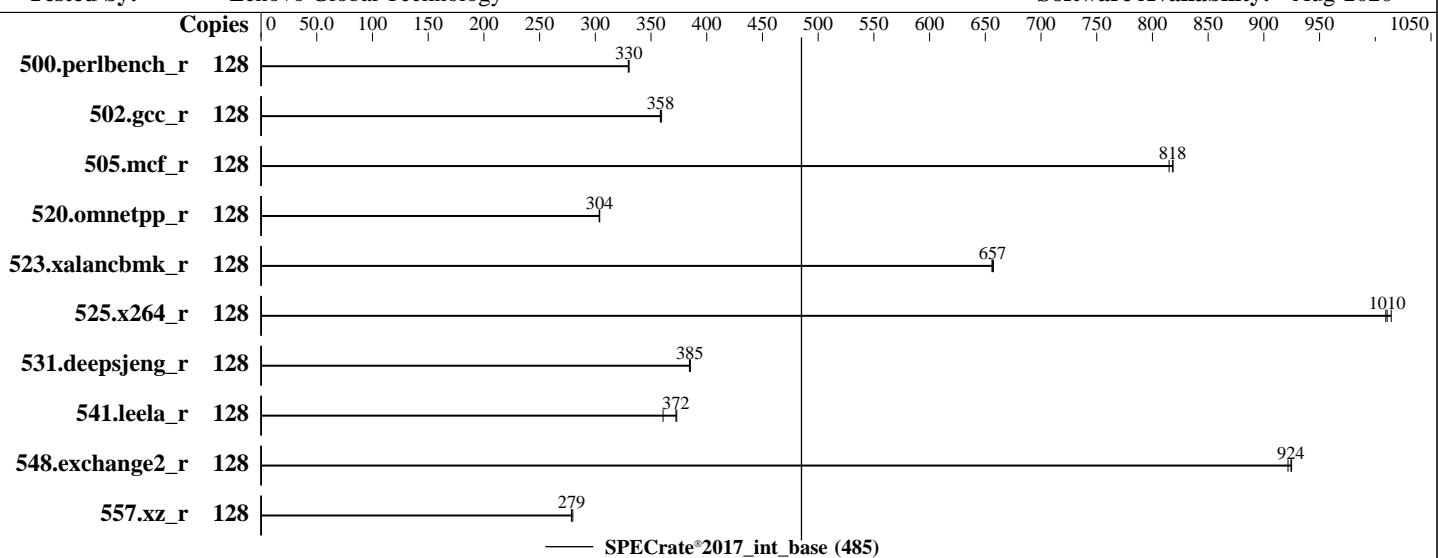

Hardware

CPU Name: Intel Xeon Gold 6328HL
Max MHz: 4300
Nominal: 2800
Enabled: 64 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 22 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux 8.2 (Ootpa)
Compiler: Kernel 4.18.0-193.el8.x86_64
C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux;
Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Lenovo BIOS Version M5E107H 1.00 released Oct-2020
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	617	330	617	330	618	330							
502.gcc_r	128	506	358	504	359	506	358							
505.mcf_r	128	253	818	253	818	254	815							
520.omnetpp_r	128	553	304	553	303	553	304							
523.xalancbmk_r	128	206	657	206	656	206	657							
525.x264_r	128	222	1010	221	1010	222	1010							
531.deepsjeng_r	128	381	385	382	384	381	385							
541.leela_r	128	569	372	588	361	568	373							
548.exchange2_r	128	363	925	364	922	363	924							
557.xz_r	128	496	279	494	280	496	279							

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.0-ic19.1u2/lib/intel64:/home/cpu2017-1.1.0-ic19.1u2/l
     ib/ia32:/home/cpu2017-1.1.0-ic19.1u2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

MONITOR/MWAIT set to Enabled

DCU Streamer Prefetcher set to Disabled

SNC set to Enabled

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2017-1.1.0-ic19.lu2/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Tue Dec 1 13:24:02 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6328HL CPU @ 2.80GHz
4 "physical id"s (chips)
128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Platform Notes (Continued)

Core(s) per socket: 16
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6328HL CPU @ 2.80GHz
Stepping: 11
CPU MHz: 3713.100
CPU max MHz: 4300.0000
CPU min MHz: 1000.0000
BogoMIPS: 5600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K
NUMA node0 CPU(s): 0-3,8-11,64-67,72-75
NUMA node1 CPU(s): 4-7,12-15,68-71,76-79
NUMA node2 CPU(s): 16-19,24-27,80-83,88-91
NUMA node3 CPU(s): 20-23,28-31,84-87,92-95
NUMA node4 CPU(s): 32-35,40-43,96-99,104-107
NUMA node5 CPU(s): 36-39,44-47,100-103,108-111
NUMA node6 CPU(s): 48-51,56-59,112-115,120-123
NUMA node7 CPU(s): 52-55,60-63,116-119,124-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpq rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occult_llc cqm_mbm_total cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lll arch_capabilities

/proc/cpuinfo cache data
cache size : 22528 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
node 0 size: 193121 MB
node 0 free: 192934 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Platform Notes (Continued)

```
node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79
node 1 size: 193532 MB
node 1 free: 193184 MB
node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
node 2 size: 193532 MB
node 2 free: 193380 MB
node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
node 3 size: 193504 MB
node 3 free: 193373 MB
node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
node 4 size: 193532 MB
node 4 free: 193378 MB
node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
node 5 size: 193532 MB
node 5 free: 193376 MB
node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
node 6 size: 193532 MB
node 6 free: 193397 MB
node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
node 7 size: 193531 MB
node 7 free: 193270 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  20  20  20  20  20  20
  1: 11  10  20  20  20  20  20  20
  2: 20  20  10  11  20  20  20  20
  3: 20  20  11  10  20  20  20  20
  4: 20  20  20  20  10  11  20  20
  5: 20  20  20  20  11  10  20  20
  6: 20  20  20  20  20  20  10  11
  7: 20  20  20  20  20  20  11  10
```

From /proc/meminfo

```
MemTotal:      1584966420 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Platform Notes (Continued)

```
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
tsx_async_abort:	Not affected

run-level 3 Dec 1 13:23

SPEC is set to: /home/cpu2017-1.1.0-ic19.1u2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	839G	23G	816G	3%	/home

From /sys/devices/virtual/dmi/id

```
BIOS: Lenovo M5E107H-1.00 10/18/2020
Vendor: Lenovo
Product: ThinkSystem SR860 V2
Product Family: ThinkSystem
Serial: none
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
```

(End of data from sysinfo program)

Memory on this system run at 2933 MHz due to CPU limitation.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
      | 525.x264_r(base) 557.xz_r(base)
```

```
-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

```
=====  
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
      | 541.leela_r(base)
```

```
-----  
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

```
=====  
Fortran | 548.exchange2_r(base)
```

```
-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.2.275 Build 20200623  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flfl -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.l1l-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.l1l-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(2.80 GHz, Intel Xeon Gold 6328HL)

SPECrate®2017_int_base = 485

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-12-01 13:24:01-0500.

Report generated on 2020-12-28 09:45:10 by CPU2017 PDF formatter v6255.

Originally published on 2020-12-22.