



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Date: Nov-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

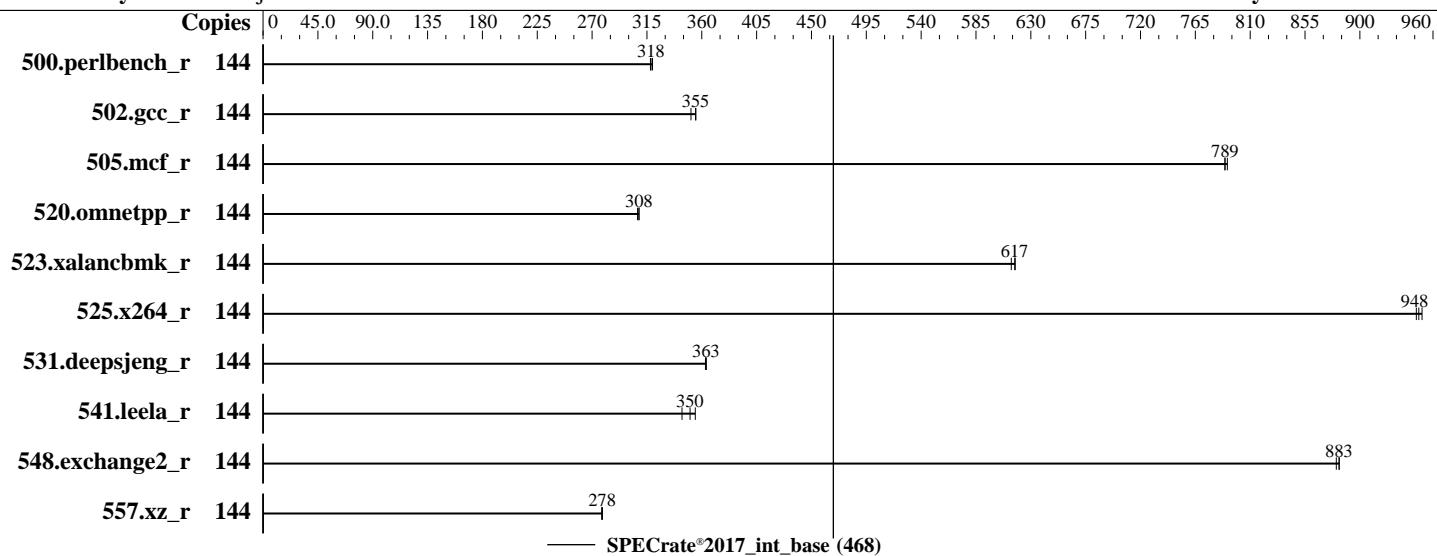

Hardware

CPU Name: Intel Xeon Gold 5318H
 Max MHz: 3800
 Nominal: 2500
 Enabled: 72 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 1 x SATA M.2 SSD, 480GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 5.3.18-22-default
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0 R1.8.0 for D3892-A1x. Released Jan-2021 tested as V1.0.0 R1.1.1 for D3892-A1x Sep-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: binutils-gold 2.32-7.11.4
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	720	318	717	320	721	318									
502.gcc_r	144	574	355	581	351	574	355									
505.mcf_r	144	294	791	295	789	295	789									
520.omnetpp_r	144	612	308	613	308	615	307									
523.xalancbmk_r	144	248	614	246	617	247	617									
525.x264_r	144	265	951	266	948	266	946									
531.deepsjeng_r	144	455	363	454	363	454	364									
541.leela_r	144	694	344	681	350	672	355									
548.exchange2_r	144	427	883	427	883	428	881									
557.xz_r	144	560	278	559	278	559	278									

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-143
echo 15000000 > /proc/sys/kernel/sched_min_granularity_ns
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/Benchmark/speccpu-ic19_lu1/lib/intel64:/home/Benchmark/speccpu-ic
    19_lu1/lib/ia32:/home/Benchmark/speccpu-ic19_lu1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

General Notes

Binaries compiled on a system with 4x Intel Xeon Platinum 8360H CPU + 1536GB RAM memory using SUSE Linux Enterprise Server 15 SP2

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

binutils-gold, an ELF linker

package available from <https://software.opensuse.org/package/binutils-gold> as follows:

- Click "Show bunutils-gold for other distributions"

- Click "Show community packages" of SUSE SLE-15-SP2

- Click "Expert Download" selecting package corresponding to 2.32 release identified by "home:gabrielftg:ulp-preview"

- Click "Grab binary packages directly"

- Click "binutils-gold-xxxx.rpm"

package was installed with rpm command i.e.:

rpm -i --nodeps bunutils-gold-xxxx.rpm

Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

Intel Virtualization Technology = Disabled

Utilization Profile = Unbalanced

Stale AtoS = Disabled

LLC Deadline Alloc = Disabled

XPT Prefetch = Enabled

Patrol Scrub = Enabled

SNC = Enabled

FAN Control = Full

Sysinfo program /home/Benchmark/speccpu-ic19_1u1/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost Wed Nov 25 13:48:03 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Nov-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) Gold 5318H CPU @ 2.50GHz
  4 "physical id"s (chips)
  144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          46 bits physical, 48 bits virtual
CPU(s):                 144
On-line CPU(s) list:   0-143
Thread(s) per core:    2
Core(s) per socket:    18
Socket(s):              4
NUMA node(s):           8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 5318H CPU @ 2.50GHz
Stepping:                11
CPU MHz:                1000.260
CPU max MHz:            3800.0000
CPU min MHz:            1000.0000
BogoMIPS:                5000.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                25344K
NUMA node0 CPU(s):      0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
NUMA node1 CPU(s):      3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
NUMA node2 CPU(s):      18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
NUMA node3 CPU(s):      21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
NUMA node4 CPU(s):      36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
NUMA node5 CPU(s):      39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
NUMA node6 CPU(s):      54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
NUMA node7 CPU(s):      57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Nov-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms
invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req pku ospke avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
node 0 size: 192128 MB
node 0 free: 191703 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
node 1 size: 193531 MB
node 1 free: 193255 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
node 2 size: 193531 MB
node 2 free: 193352 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
node 3 size: 193531 MB
node 3 free: 193348 MB
node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
node 4 size: 193497 MB
node 4 free: 193345 MB
node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
node 5 size: 193531 MB
node 5 free: 193359 MB
node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
node 6 size: 193531 MB
node 6 free: 193369 MB
node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
node 7 size: 193305 MB
node 7 free: 193121 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 20 20 20 20 20 20
 1: 11 10 20 20 20 20 20 20
 2: 20 20 10 11 20 20 20 20
 3: 20 20 11 10 20 20 20 20
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Nov-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

Platform Notes (Continued)

```
4: 20 20 20 20 10 11 20 20  
5: 20 20 20 20 11 10 20 20  
6: 20 20 20 20 20 20 10 11  
7: 20 20 20 20 20 20 11 10
```

```
From /proc/meminfo  
MemTotal: 1583707728 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
  NAME="SLES"  
  VERSION="15-SP2"  
  VERSION_ID="15.2"  
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"  
  ID="sles"  
  ID_LIKE="suse"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

```
uname -a:  
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aebe) x86_64  
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds:	Not affected
tsx_async_abort:	Not affected

run-level 3 Nov 25 13:46

```
SPEC is set to: /home/Benchmark/speccpu-ic19_lu1  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda3        xfs   376G   94G  283G  25% /home
```

From /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Nov-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

Platform Notes (Continued)

BIOS: FUJITSU V1.0.0.0 R1.1.1 for D3892-A1x

09/25/2020

Vendor: FUJITSU

Product: PRIMERGY RX4770 M6

Product Family: SERVER

Serial: MABTxxxxxx

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
| 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
| 541.leela_r(base)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-lld=gold -qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-lld=gold -qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5318H,
2.50GHz

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CPL-RevA.html>

http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CPL-RevA.xml>

http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-24 23:48:02-0500.

Report generated on 2021-01-05 14:45:29 by CPU2017 PDF formatter v6255.

Originally published on 2021-01-05.