



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**GIGA-BYTE TECHNOLOGY CO., LTD.**  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

**SPECrate®2017\_int\_base = 832**  
**SPECrate®2017\_int\_peak = 884**

CPU2017 License: 9082


Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

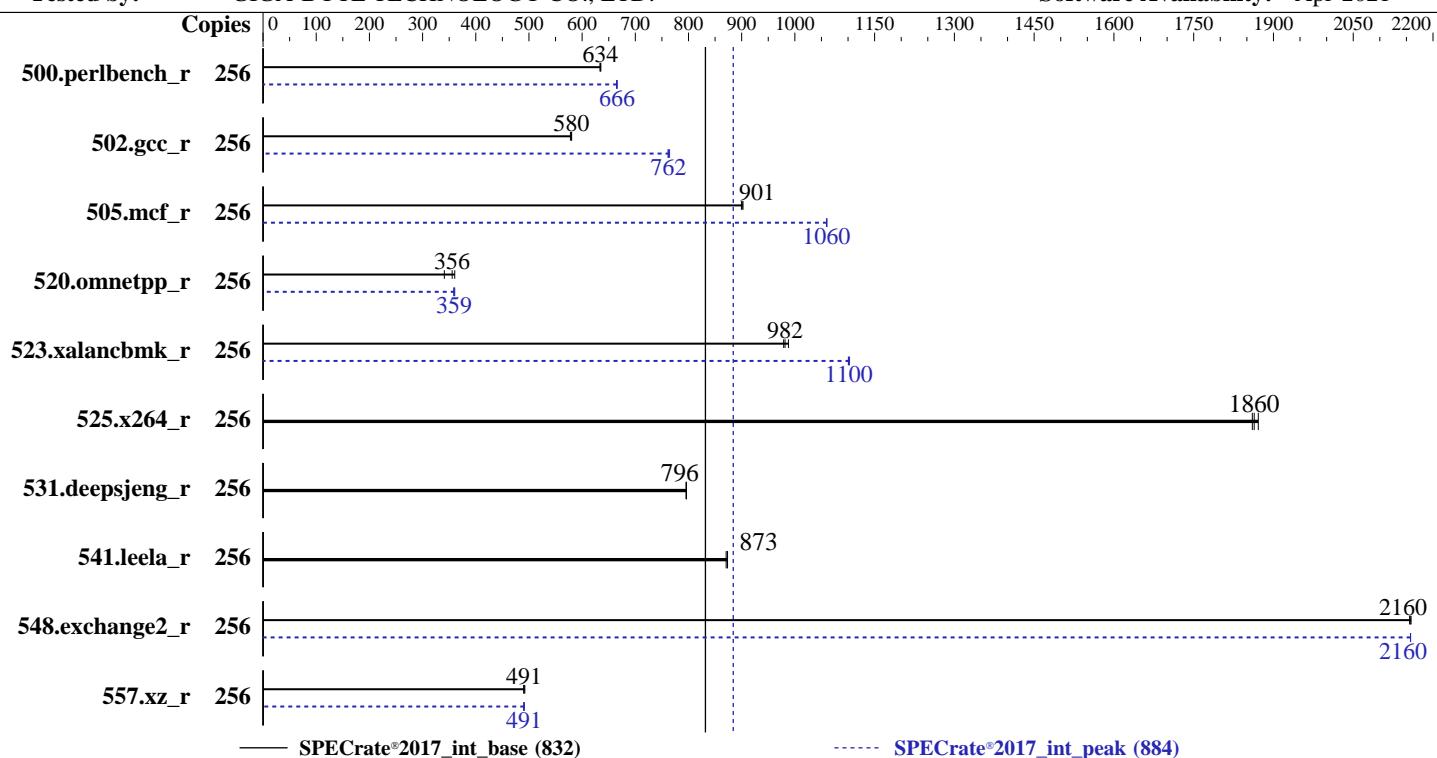

Hardware		Software	
CPU Name:	AMD EPYC 7763	OS:	Ubuntu 20.04.2 LTS (x86_64)
Max MHz:	3500		5.8.0-50-generic
Nominal:	2450	Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Enabled:	128 cores, 2 chips, 2 threads/core	Parallel:	No
Orderable:	1,2 chips	Firmware:	Version M05 released Jun-2021
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	ext4
L2:	512 KB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	32/64-bit
Memory:	1 TB (16 x 64 GB 4DRx4 PC4-3200AA-L)	Other:	jemalloc: jemalloc memory allocator library v5.2.0
Storage:	1 x 1.92 TB SATA SSD	Power Management:	BIOS set to prefer performance at the cost of additional power usage
Other:	None		



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

**SPECrate®2017\_int\_base = 832**  
**SPECrate®2017\_int\_peak = 884**

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	643	634	<b>643</b>	<b>634</b>	642	635	256	<b>612</b>	<b>666</b>	613	665	612	666		
502.gcc_r	256	<b>625</b>	<b>580</b>	627	578	625	580	256	476	762	<b>476</b>	<b>762</b>	474	764		
505.mcf_r	256	458	903	460	900	<b>459</b>	<b>901</b>	256	390	1060	<b>390</b>	<b>1060</b>	390	1060		
520.omnetpp_r	256	932	360	<b>944</b>	<b>356</b>	985	341	256	937	359	<b>935</b>	<b>359</b>	932	360		
523.xalancbmk_r	256	274	988	276	979	<b>275</b>	<b>982</b>	256	<b>245</b>	<b>1100</b>	246	1100	245	1100		
525.x264_r	256	240	1870	<b>241</b>	<b>1860</b>	241	1860	256	240	1870	<b>241</b>	<b>1860</b>	241	1860		
531.deepsjeng_r	256	369	796	<b>369</b>	<b>796</b>	369	796	256	369	796	<b>369</b>	<b>796</b>	369	796		
541.leela_r	256	487	871	485	873	<b>486</b>	<b>873</b>	256	487	871	485	873	<b>486</b>	<b>873</b>		
548.exchange2_r	256	311	2160	311	2160	<b>311</b>	<b>2160</b>	256	<b>311</b>	<b>2160</b>	311	2160	311	2160		
557.xz_r	256	562	492	564	490	<b>563</b>	<b>491</b>	256	563	491	564	490	<b>563</b>	<b>491</b>		

**SPECrate®2017\_int\_base = 832**

**SPECrate®2017\_int\_peak = 884**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Operating System Notes (Continued)

randomization (ASLR) to reduce run-to-run variability.

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak
runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base
runs to enable THP only on request.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc300_milan_A_lib/64;/home/cpu2017/amd_rate_ao
    cc300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fllto  
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:

cTDP = 280

Determinism Slider set to Power

SMT set to auto

IOMMU set to enable

Package Power Limit set to 280

NUMA nodes per socket set to NPS4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Platform Notes (Continued)

4-link xGMI max speed set to auto

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on amd-R282-Z90-00 Tue Jun  8 13:26:15 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7763 64-Core Processor
  2 "physical id"s (chips)
  256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                256
On-line CPU(s) list:   0-255
Thread(s) per core:    2
Core(s) per socket:   64
Socket(s):             2
NUMA node(s):          16
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 1
Model name:            AMD EPYC 7763 64-Core Processor
Stepping:               1
Frequency boost:       enabled
CPU MHz:               3103.368
CPU max MHz:           2450.0000
CPU min MHz:           1500.0000
BogoMIPS:              4899.92
Virtualization:        AMD-V
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**GIGA-BYTE TECHNOLOGY CO., LTD.**  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

**SPECCrate®2017\_int\_base = 832**  
**SPECCrate®2017\_int\_peak = 884**

**CPU2017 License:** 9082

**Test Date:** Jun-2021

**Test Sponsor:** GIGA-BYTE TECHNOLOGY CO., LTD.

**Hardware Availability:** Jun-2021

**Tested by:** GIGA-BYTE TECHNOLOGY CO., LTD.

**Software Availability:** Apr-2021

## Platform Notes (Continued)

L1d cache:	4 MiB
L1i cache:	4 MiB
L2 cache:	64 MiB
L3 cache:	512 MiB
NUMA node0 CPU(s):	0-7,128-135
NUMA node1 CPU(s):	8-15,136-143
NUMA node2 CPU(s):	16-23,144-151
NUMA node3 CPU(s):	24-31,152-159
NUMA node4 CPU(s):	32-39,160-167
NUMA node5 CPU(s):	40-47,168-175
NUMA node6 CPU(s):	48-55,176-183
NUMA node7 CPU(s):	56-63,184-191
NUMA node8 CPU(s):	64-71,192-199
NUMA node9 CPU(s):	72-79,200-207
NUMA node10 CPU(s):	80-87,208-215
NUMA node11 CPU(s):	88-95,216-223
NUMA node12 CPU(s):	96-103,224-231
NUMA node13 CPU(s):	104-111,232-239
NUMA node14 CPU(s):	112-119,240-247
NUMA node15 CPU(s):	120-127,248-255
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full AMD retrpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cq_m_rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cq_m_llc cq_m_occup_llc cq_m_mb_m_total cq_m_mb_m_local clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca fsrm

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECCrate®2017\_int\_base = 832  
SPECCrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Platform Notes (Continued)

cache size : 512 KB

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7 128 129 130 131 132 133 134 135
node 0 size: 64385 MB
node 0 free: 63941 MB
node 1 cpus: 8 9 10 11 12 13 14 15 136 137 138 139 140 141 142 143
node 1 size: 64506 MB
node 1 free: 64141 MB
node 2 cpus: 16 17 18 19 20 21 22 23 144 145 146 147 148 149 150 151
node 2 size: 64508 MB
node 2 free: 64184 MB
node 3 cpus: 24 25 26 27 28 29 30 31 152 153 154 155 156 157 158 159
node 3 size: 64507 MB
node 3 free: 64187 MB
node 4 cpus: 32 33 34 35 36 37 38 39 160 161 162 163 164 165 166 167
node 4 size: 64508 MB
node 4 free: 64206 MB
node 5 cpus: 40 41 42 43 44 45 46 47 168 169 170 171 172 173 174 175
node 5 size: 64507 MB
node 5 free: 64222 MB
node 6 cpus: 48 49 50 51 52 53 54 55 176 177 178 179 180 181 182 183
node 6 size: 64508 MB
node 6 free: 64226 MB
node 7 cpus: 56 57 58 59 60 61 62 63 184 185 186 187 188 189 190 191
node 7 size: 64495 MB
node 7 free: 64213 MB
node 8 cpus: 64 65 66 67 68 69 70 71 192 193 194 195 196 197 198 199
node 8 size: 64508 MB
node 8 free: 64213 MB
node 9 cpus: 72 73 74 75 76 77 78 79 200 201 202 203 204 205 206 207
node 9 size: 64507 MB
node 9 free: 64203 MB
node 10 cpus: 80 81 82 83 84 85 86 87 208 209 210 211 212 213 214 215
node 10 size: 64483 MB
node 10 free: 64194 MB
node 11 cpus: 88 89 90 91 92 93 94 95 216 217 218 219 220 221 222 223
node 11 size: 64507 MB
node 11 free: 64230 MB
node 12 cpus: 96 97 98 99 100 101 102 103 224 225 226 227 228 229 230 231
node 12 size: 64508 MB
node 12 free: 64200 MB
node 13 cpus: 104 105 106 107 108 109 110 111 232 233 234 235 236 237 238 239
node 13 size: 64507 MB
node 13 free: 64159 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Platform Notes (Continued)

```
node 14 cpus: 112 113 114 115 116 117 118 119 240 241 242 243 244 245 246 247
node 14 size: 64508 MB
node 14 free: 64205 MB
node 15 cpus: 120 121 122 123 124 125 126 127 248 249 250 251 252 253 254 255
node 15 size: 64505 MB
node 15 free: 64173 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  11  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  1: 11  10  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  2: 12  12  10  11  12  12  12  32  32  32  32  32  32  32  32  32
  3: 12  12  11  10  12  12  12  32  32  32  32  32  32  32  32  32
  4: 12  12  12  12  10  11  12  32  32  32  32  32  32  32  32  32
  5: 12  12  12  12  11  10  12  32  32  32  32  32  32  32  32  32
  6: 12  12  12  12  12  10  11  32  32  32  32  32  32  32  32  32
  7: 12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
  8: 32  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12
  9: 32  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12
 10: 32  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12
 11: 32  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12
 12: 32  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12
 13: 32  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12
 14: 32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10
 15: 32  32  32  32  32  32  32  32  32  12  12  12  12  12  11  10
```

From /proc/meminfo

```
MemTotal:      1056729084 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

/usr/bin/lsb\_release -d  
Ubuntu 20.04.2 LTS

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.2 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.2 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Platform Notes (Continued)

```
uname -a:  
Linux amd-R282-Z90-00 5.8.0-50-generic #56~20.04.1-Ubuntu SMP Mon Apr 12 21:46:35 UTC  
2021 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Mar 18 05:36

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	ext4	1.8T	156G	1.5T	10%	/

From /sys/devices/virtual/dmi/id  
Vendor: GIGABYTE  
Product: R282-Z90-00  
Product Family: Server  
Serial: GKM7N1112A0058

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M386A8K40DM2-CWE	64 GB	4 rank	3200
16x Unknown	Unknown		

BIOS:

BIOS Vendor:	GIGABYTE
BIOS Version:	M05
BIOS Date:	06/02/2021

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Platform Notes (Continued)

BIOS Revision: 5.22

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----


=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----


=====
C      | 502.gcc_r(peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----


=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Compiler Version Notes (Continued)

```
=====
C++      | 523.xalancbmk_r(peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
    LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
    LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

=====
C++      | 523.xalancbmk_r(peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
    LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
    LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

=====
Fortran | 548.exchange2_r(base, peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp  
-fsto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -futo  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc  
  
502.gcc\_r: -m32 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -futo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Peak Optimization Flags (Continued)

502.gcc\_r (continued):

```
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf\_r: -m64 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -m64 -std=c++98

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

523.xalancbmk\_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v115aocc3/amd\_rate\_aocc300\_milan\_A\_lib/32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v115aocc3/amd\_rate\_aocc300\_milan\_A\_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.2-Milan.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7763, 2.45GHz)

SPECrate®2017\_int\_base = 832  
SPECrate®2017\_int\_peak = 884

CPU2017 License: 9082

Test Date: Jun-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Jun-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Apr-2021

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.2-Milan.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-06-08 01:26:15-0400.

Report generated on 2021-07-06 18:36:33 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-06.