



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECSpeed®2017_fp_base = 165

SPECSpeed®2017_fp_peak = 167

CPU2017 License: 3


Test Date: Sep-2021

Test Sponsor: HPE

Hardware Availability: Jun-2021

Tested by: HPE

Software Availability: Aug-2021

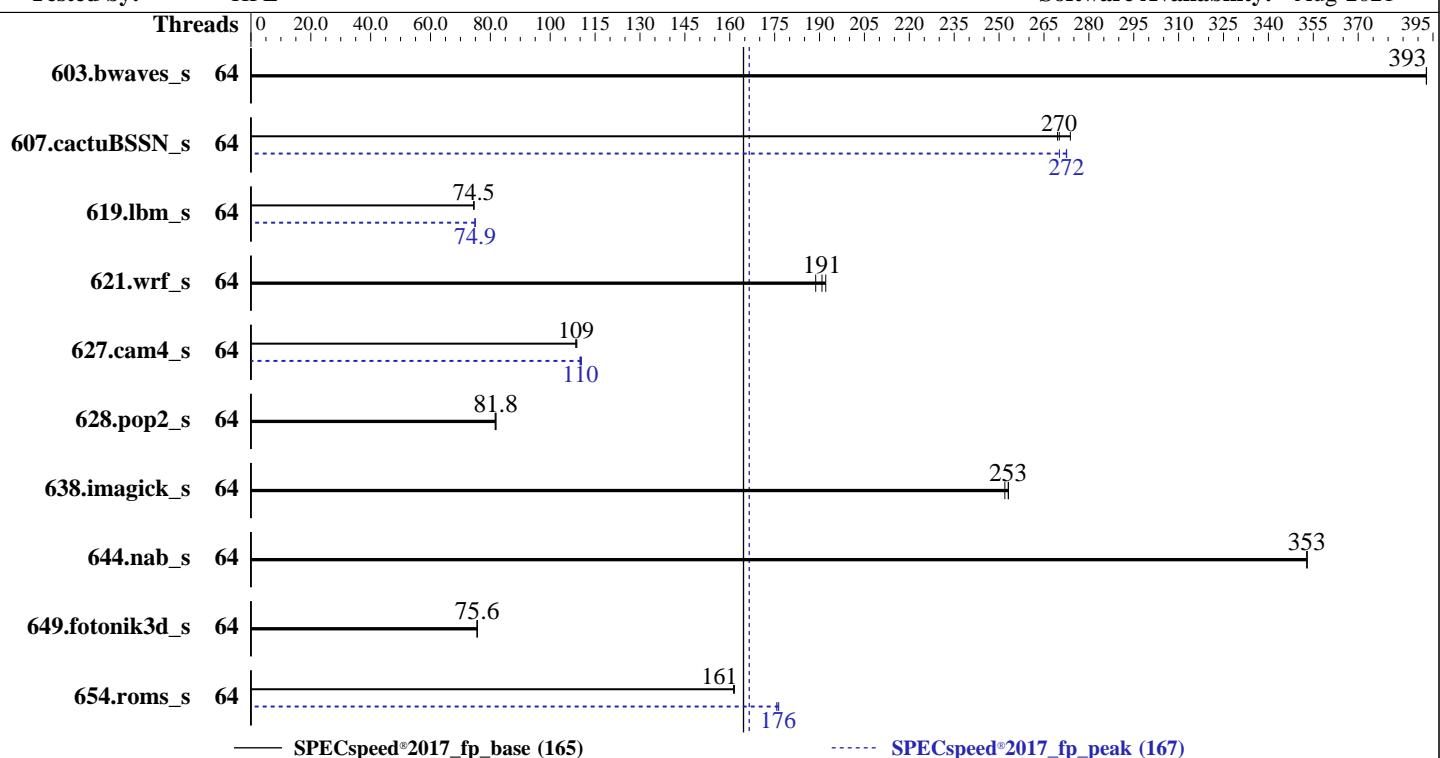

Hardware		Software	
CPU Name:	AMD EPYC 7713P	OS:	Ubuntu 20.04.1 LTS (x86_64)
Max MHz:	3675	Compiler:	Kernel 5.4.0-84-generic
Nominal:	2000	Parallel:	C/C++/Fortran: Version 3.0.0 of AOCC
Enabled:	64 cores, 1 chip	Firmware:	Yes
Orderable:	1 chip	File System:	HPE BIOS Version A43 v2.52 08/24/2021 released Aug-2021
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	ext4
L2:	512 KB I+D on chip per core	Base Pointers:	Run level 5 (multi-user)
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores	Peak Pointers:	64-bit
Other:	None	Other:	64-bit
Memory:	1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)	Power Management:	jemalloc: jemalloc memory allocator library v5.1.0
Storage:	1 x 480 GB SAS SSD, RAID 0		BIOS set to prefer performance at the cost of additional power usage
Other:	None		



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Date: Sep-2021

Test Sponsor: HPE

Hardware Availability: Jun-2021

Tested by: HPE

Software Availability: Aug-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	150	393	150	393	150	393	64	150	393	150	393	150	393
607.cactuBSSN_s	64	60.9	274	61.7	270	61.8	270	64	61.2	272	61.2	273	61.7	270
619.lbm_s	64	70.3	74.5	70.3	74.5	70.3	74.5	64	69.9	74.9	70.0	74.9	69.9	74.9
621.wrf_s	64	68.9	192	69.3	191	70.1	189	64	68.9	192	69.3	191	70.1	189
627.cam4_s	64	81.4	109	81.6	109	81.6	109	64	80.2	110	80.6	110	80.5	110
628.pop2_s	64	145	81.8	146	81.6	145	81.9	64	145	81.8	146	81.6	145	81.9
638.imagick_s	64	57.0	253	57.3	252	57.0	253	64	57.0	253	57.3	252	57.0	253
644.nab_s	64	49.5	353	49.5	353	49.5	353	64	49.5	353	49.5	353	49.5	353
649.fotonik3d_s	64	121	75.6	121	75.6	121	75.6	64	121	75.6	121	75.6	121	75.6
654.roms_s	64	97.5	162	97.6	161	97.6	161	64	89.4	176	89.6	176	89.3	176

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
```

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/cpu2017/amd_speed
    _aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 607.cactubSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 627.cam4_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Date: Sep-2021

Test Sponsor: HPE

Hardware Availability: Jun-2021

Tested by: HPE

Software Availability: Aug-2021

General Notes (Continued)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

AMD SMT Option set to Disabled

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to One memory domain per socket

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Infinity Fabric Power Management set to Disabled

Infinity Fabric Performance State set to P0

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d

running on admin1 Wed Sep 15 12:34:23 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7713P 64-Core Processor

1 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

From lscpu from util-linux 2.34:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 48 bits physical, 48 bits virtual

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 1

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Date: Sep-2021

Test Sponsor: HPE

Hardware Availability: Jun-2021

Tested by: HPE

Software Availability: Aug-2021

Platform Notes (Continued)

Core(s) per socket:	64
Socket(s):	1
NUMA node(s):	8
Vendor ID:	AuthenticAMD
CPU family:	25
Model:	1
Model name:	AMD EPYC 7713P 64-Core Processor
Stepping:	1
Frequency boost:	enabled
CPU MHz:	1407.106
CPU max MHz:	2000.0000
CPU min MHz:	1500.0000
BogoMIPS:	3992.76
Virtualization:	AMD-V
L1d cache:	2 MiB
L1i cache:	2 MiB
L2 cache:	32 MiB
L3 cache:	256 MiB
NUMA node0 CPU(s):	0-7
NUMA node1 CPU(s):	8-15
NUMA node2 CPU(s):	16-23
NUMA node3 CPU(s):	24-31
NUMA node4 CPU(s):	32-39
NUMA node5 CPU(s):	40-47
NUMA node6 CPU(s):	48-55
NUMA node7 CPU(s):	56-63
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Platform Notes (Continued)

```
cqm_mbm_total cqm_mbm_local clzero irperf xsaverptr wbnoinvd arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmlload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	2M	8	Data	1
L1i	32K	2M	8	Instruction	1
L2	512K	32M	8	Unified	2
L3	32M	256M	16	Unified	3

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 128776 MB
node 0 free: 128619 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 129022 MB
node 1 free: 128632 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 129022 MB
node 2 free: 128838 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 129022 MB
node 3 free: 128898 MB
node 4 cpus: 32 33 34 35 36 37 38 39
node 4 size: 129022 MB
node 4 free: 128874 MB
node 5 cpus: 40 41 42 43 44 45 46 47
node 5 size: 128997 MB
node 5 free: 128874 MB
node 6 cpus: 48 49 50 51 52 53 54 55
node 6 size: 129022 MB
node 6 free: 128851 MB
node 7 cpus: 56 57 58 59 60 61 62 63
node 7 size: 116908 MB
node 7 free: 116787 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 11 11 11 11 11 11
 1: 11 10 11 11 11 11 11 11
 2: 11 11 10 11 11 11 11 11
 3: 11 11 11 10 11 11 11 11
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Date: Sep-2021

Test Sponsor: HPE

Hardware Availability: Jun-2021

Tested by: HPE

Software Availability: Aug-2021

Platform Notes (Continued)

```
4: 11 11 11 11 10 11 11 11
5: 11 11 11 11 11 10 11 11
6: 11 11 11 11 11 11 10 11
7: 11 11 11 11 11 11 11 10
```

From /proc/meminfo

```
MemTotal:      1044267872 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
ondemand

/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS

From /etc/*release* /etc/*version*

```
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.1 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.1 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux admin1 5.4.0-84-generic #94-Ubuntu SMP Thu Aug 26 20:27:37 UTC 2021 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Platform Notes (Continued)

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Sep 15 12:30

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	17G	170G	9%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL345 Gen10 Plus
Product Family:	ProLiant
Serial:	J20APP000K

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M386AAG40AM3-CWE	128 GB	4 rank	3200
8x UNKNOWN	NOT AVAILABLE		

BIOS:

BIOS Vendor:	HPE
BIOS Version:	A43
BIOS Date:	08/24/2021
BIOS Revision:	2.52
Firmware Revision:	2.55

(End of data from sysinfo program)

Compiler Version Notes

=====

C	619.lbm_s(base, peak) 638.imagick_s(base, peak)
	644.nab_s(base, peak)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Compiler Version Notes (Continued)

C++, C, Fortran | 607.cactusBSSN_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Fortran benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fsto
-fstruct-layout=5 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Peak Optimization Flags (Continued)

619.lbm_s (continued):

```
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

```
654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

Peak Optimization Flags (Continued)

627.cam4_s (continued):

```
-mllvm -reduce-array-computations=3 -Mrecursive  
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm  
-ljemalloc -lflang
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true -mllvm -function-specialize  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revQ.html>
<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revQ.xml>
<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_fp_base = 165

SPECspeed®2017_fp_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2021

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-15 08:34:23-0400.

Report generated on 2021-10-12 17:16:49 by CPU2017 PDF formatter v6442.

Originally published on 2021-10-12.