



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019


Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

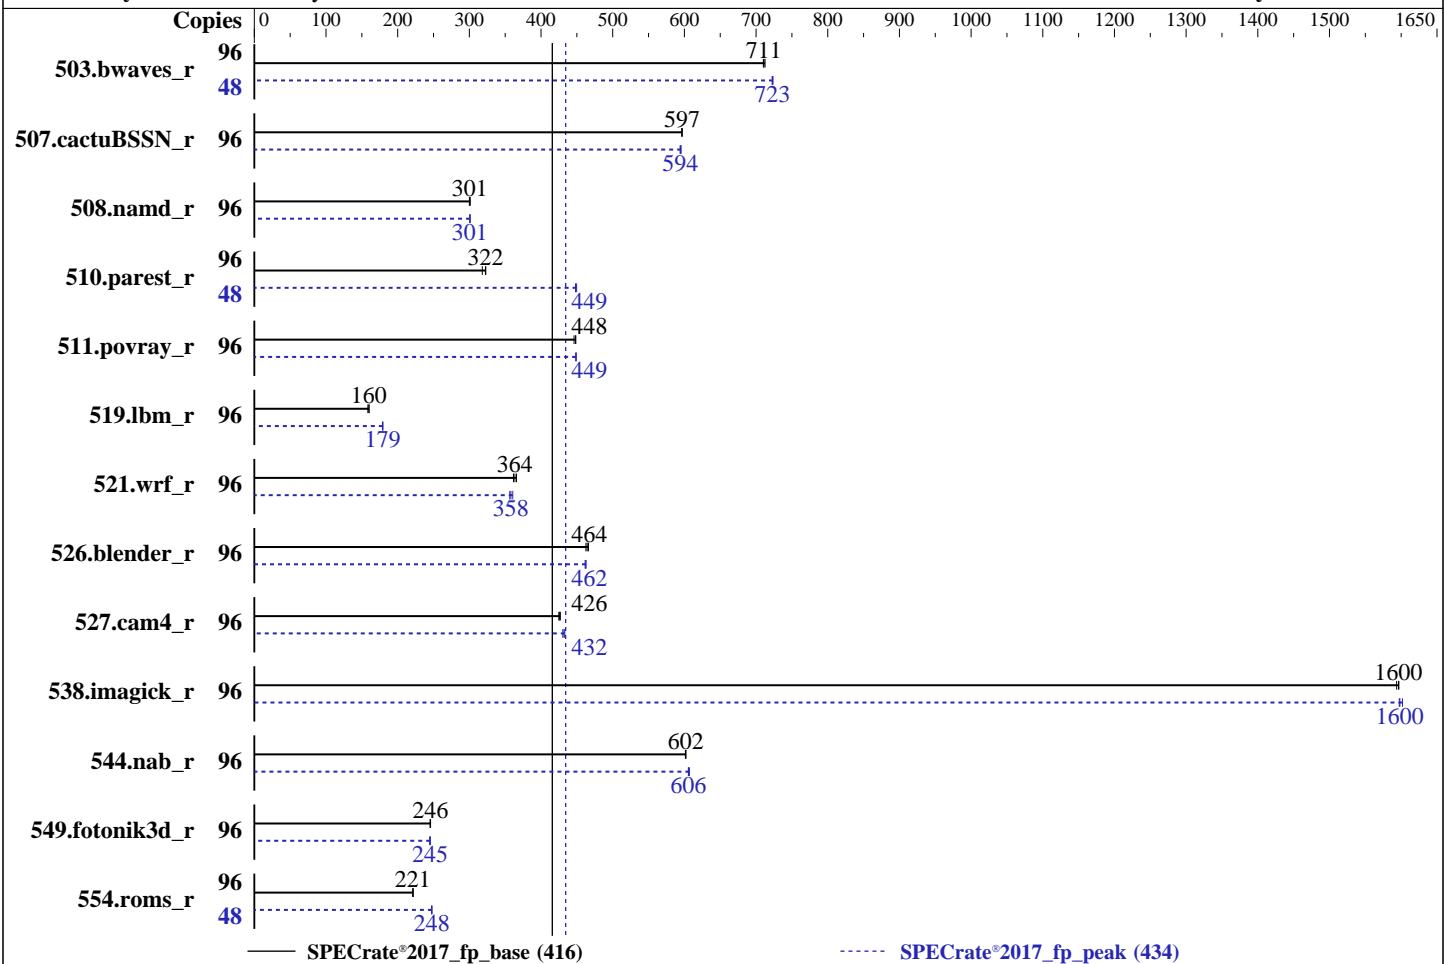

— SPECrate®2017_fp_base (416)

----- SPECrate®2017_fp_peak (434)

Hardware

CPU Name: AMD EPYC 7443
 Max MHz: 4000
 Nominal: 2850
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 32 MB shared / 6 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200V-L)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

OS:

SUSE Linux Enterprise Server 15 SP2 (x86_64)

kernel version 5.3.18-22-default

Compiler: C/C++/Fortran: Version 3.0.0 of AOCC

Parallel: No

Firmware: Version 4.2.200.3 released May-2021

File System: btrfs

System State: Run level 5 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 64-bit

Other: jemalloc: jemalloc memory allocator library v5.1.0

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage

Software



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1354	711	1356	710	1351	713	48	666	722	666	723	665	724
507.cactubSSN_r	96	204	596	204	597	204	597	96	204	595	205	594	204	594
508.namd_r	96	303	301	303	301	304	300	96	303	301	303	301	303	301
510.parest_r	96	790	318	778	323	779	322	48	280	449	280	448	279	450
511.povray_r	96	500	448	503	446	500	448	96	500	449	500	449	499	449
519.lbm_r	96	639	158	632	160	633	160	96	565	179	565	179	564	179
521.wrf_r	96	588	366	595	362	591	364	96	601	358	596	361	603	356
526.blender_r	96	316	463	315	464	314	466	96	317	461	316	462	316	463
527.cam4_r	96	395	426	395	425	393	427	96	389	432	390	430	388	433
538.imagick_r	96	150	1600	150	1600	150	1590	96	149	1600	149	1600	149	1600
544.nab_r	96	268	602	268	602	269	601	96	267	606	267	606	266	607
549.fotonik3d_r	96	1523	246	1526	245	1522	246	96	1529	245	1526	245	1524	245
554.roms_r	96	688	222	690	221	690	221	48	308	247	308	248	308	248

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
'cpupower frequency-set -g performance' run as root to set the scaling governor to performance.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc300_milan_B_lib/lib;/home/cpu2017/amd_rate_a
    occ300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

SMT Mode set to Auto

NUMA nodes per socket set to NPS4

ACPI SRAT L3 Cache As NUMA Domain set to Enabled

DRAM Scrub Time set to Disabled

Determinism Slider set to Power

cTDP Control set to Manual

cTDP set to 280

EDC Control set to Manual

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Platform Notes (Continued)

EDC set to 300
L2 Stream HW Prefetcher set to Disabled
Memory Interleaving set to Disabled
APBDIS set to 1
xGMI Link config set to 4

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on install Wed Aug 18 01:28:16 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7443 24-Core Processor
2 "physical id"s (chips)
96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu from util-linux 2.33.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 96
On-line CPU(s) list: 0-95
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7443 24-Core Processor
Stepping: 1
CPU MHz: 1825.012
CPU max MHz: 2850.0000
CPU min MHz: 1500.0000
BogoMIPS: 5689.45
Virtualization: AMD-V
L1d cache: 32K

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Platform Notes (Continued)

L1i cache: 32K
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_l1c cqmq_occup_l1c cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmlload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 257854 MB
node 0 free: 257496 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 258010 MB
node 1 free: 257677 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 258043 MB
node 2 free: 257834 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 258031 MB
node 3 free: 257626 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 258043 MB
node 4 free: 257841 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 258043 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Platform Notes (Continued)

```
node 5 free: 257849 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 258043 MB
node 6 free: 257836 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 258042 MB
node 7 free: 257844 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

From /proc/meminfo
MemTotal:        2113653288 kB
HugePages_Total:          0
Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP2"
  VERSION_ID="15.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:
Linux install 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeба) x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Apr 17 06:12

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb2	btrfs	222G	17G	204G	8%	/home

From /sys/devices/virtual/dmi/id
Vendor: Cisco Systems Inc
Product: UCSC-C245-M6SX
Serial: WZP25130VQH

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200
16x Unknown Unknown

BIOS:

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C245M6.4.2.200.3.0518212014
BIOS Date: 05/18/2021
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Compiler Version Notes (Continued)

LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

Fortran	503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
	554.roms_r(base, peak)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

Fortran, C	521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------	--

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -fno -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fno -
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -unroll-threshold=100 -finline-aggressive  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false  
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc  
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1  
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs  
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false  
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fsto  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIB -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false  
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop  
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-lamdlibm -ljemalloc -lflang -lflangrti
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -Kieee -Mrecursive  
-lamdlibm -ljemalloc -lflang -lflangrti
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -O3 -ffast-math  
-funroll-loops -mllvm -extra-vectorizer-passes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

527.cam4_r (continued):

```
-mllvm -lsrc-in-nested-loop -Mrecursive -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp  
-festo -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true -mllvm -function-specialize  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp  
-festo -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true -mllvm -function-specialize  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-finline-aggressive -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes  
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C245 M6 (AMD EPYC 7443 24-Core, Processor)

SPECrate®2017_fp_base = 416

SPECrate®2017_fp_peak = 434

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Mar-2021

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-18 04:28:16-0400.

Report generated on 2021-10-25 17:07:35 by CPU2017 PDF formatter v6442.

Originally published on 2021-10-25.