



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

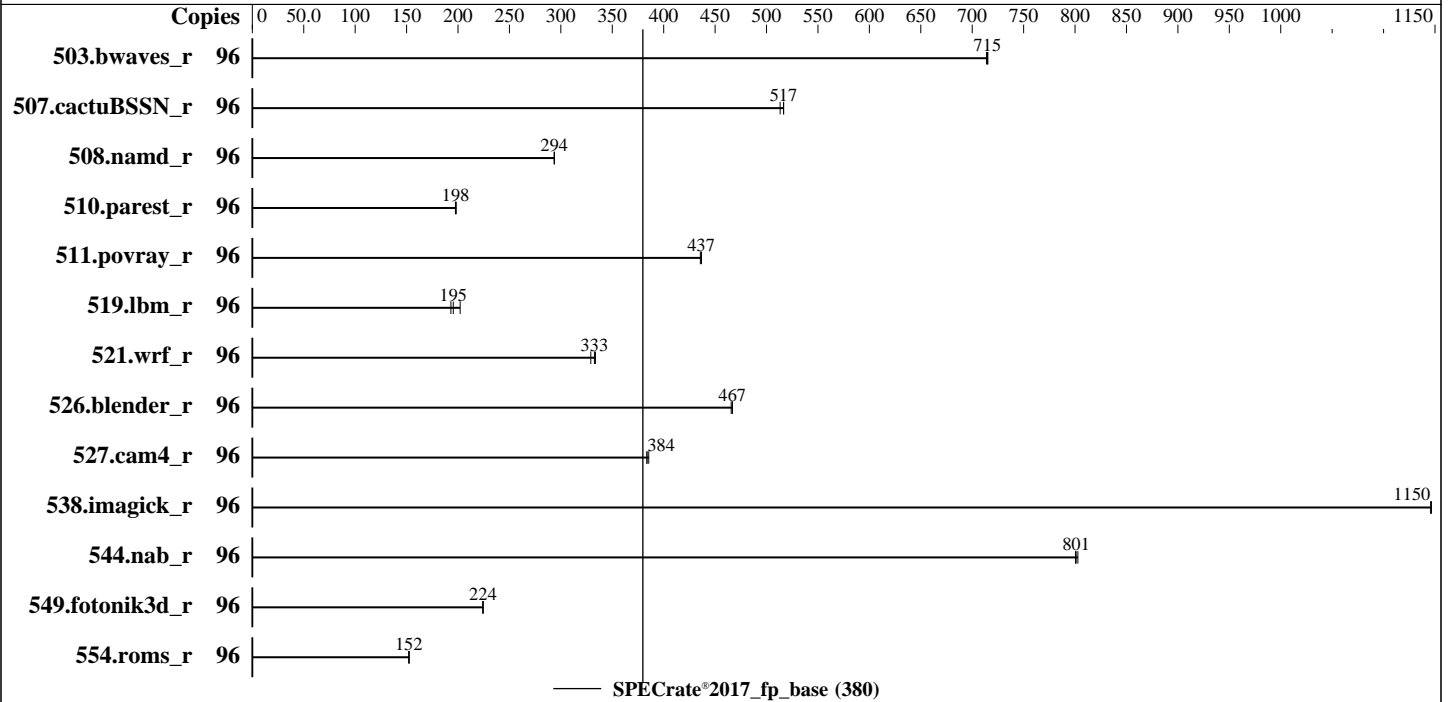

Hardware

CPU Name: Intel Xeon Gold 6342
 Max MHz: 3500
 Nominal: 2800
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 36 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 240 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP3 5.3.18-57-default
 Compiler: C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++ Compiler Build 20210924 for Linux;
 Fortran: Version 2021.4.0 of Intel Fortran Compiler Classic Build 20210910 for Linux;
 Parallel: No
 Firmware: Version 5.0.1d released Aug-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2021
Hardware Availability: Sep-2021
Software Availability: Sep-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	<u>1347</u>	<u>715</u>	1346	715	1349	714							
507.cactuBSSN_r	96	<u>235</u>	<u>517</u>	235	517	237	513							
508.namd_r	96	311	294	<u>311</u>	<u>294</u>	310	294							
510.parest_r	96	<u>1270</u>	<u>198</u>	1272	198	1267	198							
511.povray_r	96	513	437	515	436	<u>514</u>	<u>437</u>							
519.lbm_r	96	501	202	<u>518</u>	<u>195</u>	524	193							
521.wrf_r	96	653	329	<u>646</u>	<u>333</u>	645	334							
526.blender_r	96	<u>313</u>	<u>467</u>	314	466	313	467							
527.cam4_r	96	436	385	<u>438</u>	<u>384</u>	438	384							
538.imagick_r	96	208	1150	<u>208</u>	<u>1150</u>	208	1150							
544.nab_r	96	<u>202</u>	<u>801</u>	201	803	202	800							
549.fotonik3d_r	96	<u>1667</u>	<u>224</u>	1667	224	1669	224							
554.roms_r	96	1000	153	1002	152	<u>1002</u>	<u>152</u>							

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM memory using openSUSE Leap 15.2
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Disabled

DCU Streamer Prefetch set to Disabled

Sub NUMA Clustering set to Enabled

LLC Dead Line set to Disabled

Memory Refresh Rate set to 1x Refresh

ADDDC Sparing set to Disabled

Patrol Scrub set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on perf-bladel Wed Dec 1 23:38:56 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6342 CPU @ 2.80GHz
```

```
2 "physical id"s (chips)
```

```
96 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
```

```
siblings : 48
```

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

```
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

From lscpu from util-linux 2.36.2:

```
Architecture: x86_64
```

```
CPU op-mode(s): 32-bit, 64-bit
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

Platform Notes (Continued)

```

Byte Order:                Little Endian
Address sizes:             46 bits physical, 57 bits virtual
CPU(s):                   96
On-line CPU(s) list:      0-95
Thread(s) per core:       2
Core(s) per socket:      24
Socket(s):                2
NUMA node(s):            4
Vendor ID:                GenuineIntel
CPU family:               6
Model:                   106
Model name:               Intel(R) Xeon(R) Gold 6342 CPU @ 2.80GHz
Stepping:                 6
CPU MHz:                  3153.583
CPU max MHz:              3500.0000
CPU min MHz:              800.0000
BogoMIPS:                 5600.00
Virtualization:          VT-x
L1d cache:               2.3 MiB
L1i cache:               1.5 MiB
L2 cache:                60 MiB
L3 cache:                72 MiB
NUMA node0 CPU(s):       0-11,48-59
NUMA node1 CPU(s):       12-23,60-71
NUMA node2 CPU(s):       24-35,72-83
NUMA node3 CPU(s):       36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

Platform Notes (Continued)

```
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat
pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid fsrm md_clear pconfig flush_lld arch_capabilities
```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1.3M	60M	20	Unified	2	1024	1	64
L3	36M	72M	12	Unified	3	49152	1	64

```
/proc/cpuinfo cache data
cache size : 36864 KB
```

From `numactl --hardware`

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 48 49 50 51 52 53 54 55 56 57 58 59

node 0 size: 515684 MB

node 0 free: 515034 MB

node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 60 61 62 63 64 65 66 67 68 69 70 71

node 1 size: 516089 MB

node 1 free: 515470 MB

node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 72 73 74 75 76 77 78 79 80 81 82 83

node 2 size: 516089 MB

node 2 free: 515343 MB

node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 84 85 86 87 88 89 90 91 92 93 94 95

node 3 size: 516052 MB

node 3 free: 515466 MB

node distances:

node 0 1 2 3

0: 10 11 20 20

1: 11 10 20 20

2: 20 20 10 11

3: 20 20 11 10

From `/proc/meminfo`

MemTotal: 2113450040 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

From `/etc/*release* /etc/*version*`

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2021
Hardware Availability: Sep-2021
Software Availability: Sep-2021

Platform Notes (Continued)

```
os-release:
  NAME="SLES"
  VERSION="15-SP3"
  VERSION_ID="15.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

```
uname -a:
Linux perf-blade1 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Dec 1 20:13
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   181G   54G  128G  30% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Cisco Systems Inc
Product:         UCSX-210C-M6
Serial:         FCH25057AMV
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2021
Hardware Availability: Sep-2021
Software Availability: Sep-2021

Platform Notes (Continued)

32x 0xCE00 M393A8G40AB2-CWE 64 GB 2 rank 3200

BIOS:

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: X210M6.5.0.1d.0.0816211754
BIOS Date: 08/16/2021
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

Compiler Version Notes (Continued)

Version 2021.4.0 Build 20210924
 Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
 Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.4.0 Build 20210910_000000
 Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
 Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
 =====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.4.0 Build 20210910_000000
 Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
 Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
 =====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
 Intel(R) 64, Version 2021.4.0 Build 20210910_000000
 Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
 Version 2021.4.0 Build 20210924
 Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2021
Hardware Availability: Sep-2021
Software Availability: Sep-2021

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc -L/home/cpu2017/je5.0.1-64

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc -L/home/cpu2017/je5.0.1-64

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-mbranches-within-32B-boundaries -ljemalloc -L/home/cpu2017/je5.0.1-64

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -ljemalloc -L/home/cpu2017/je5.0.1-64

Benchmarks using both C and C++:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6342, 2.80GHz)

SPECrate®2017_fp_base = 380

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mbranches-within-32B-boundaries -ljemalloc -L/home/cpu2017/je5.0.1-64
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -ljemalloc -L/home/cpu2017/je5.0.1-64
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.2021-12-22.html

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revJ.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.2021-12-22.xml

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revJ.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-02 02:38:55-0500.

Report generated on 2021-12-22 12:31:06 by CPU2017 PDF formatter v6442.

Originally published on 2021-12-21.