



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

CPU2017 License: 9019


Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

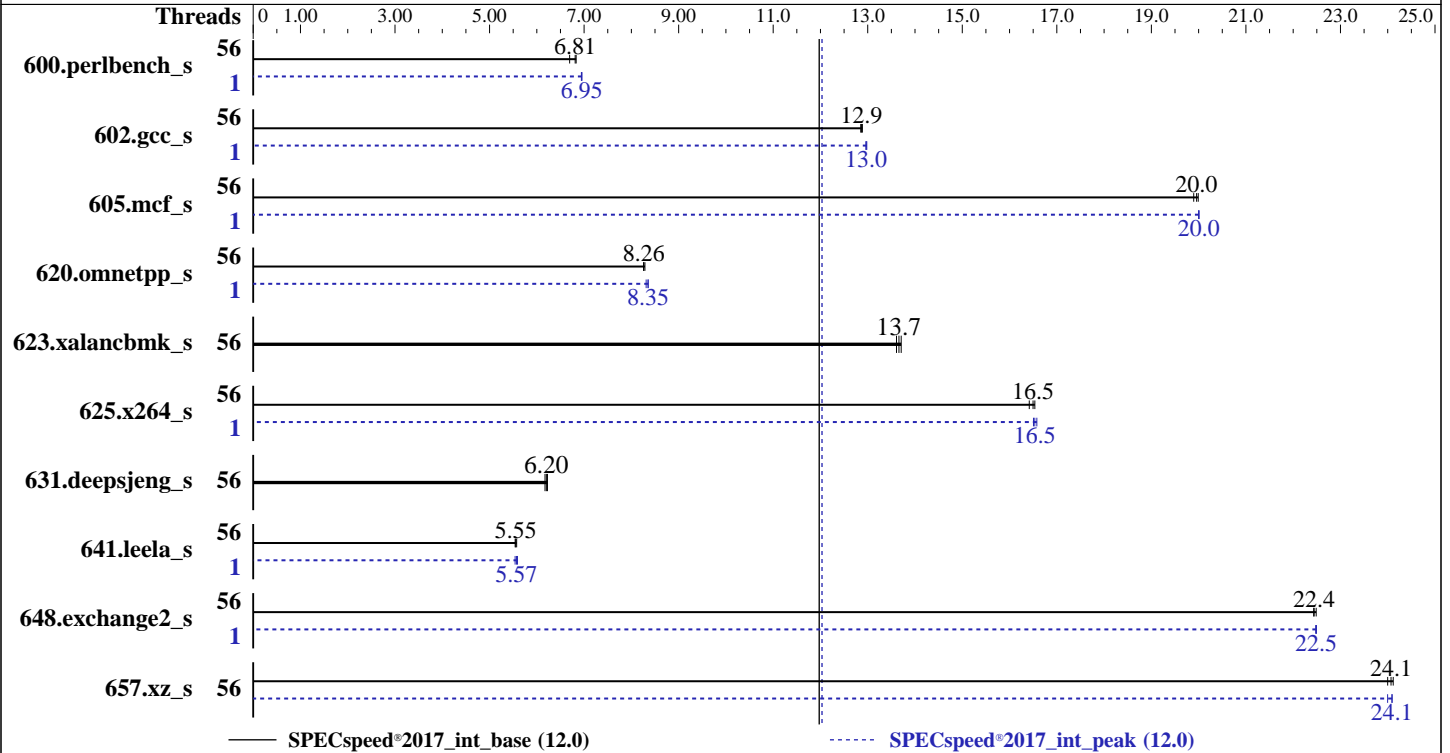

### Hardware

CPU Name: AMD EPYC 7663  
 Max MHz: 3500  
 Nominal: 2000  
 Enabled: 56 cores, 1 chip  
 Orderable: 1 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 7 cores  
 Other: None  
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200V-L)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP3 (x86\_64)  
 kernel version  
 5.3.18-57-default  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 4.2.1c released Aug-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	56	<b><u>261</u></b>	<b><u>6.81</u></b>	265	6.69	260	6.83	1	256	6.94	<b><u>255</u></b>	<b><u>6.95</u></b>	255	6.95
602.gcc_s	56	310	12.9	<b><u>309</u></b>	<b><u>12.9</u></b>	309	12.9	1	307	13.0	<b><u>307</u></b>	<b><u>13.0</u></b>	307	13.0
605.mcf_s	56	236	20.0	237	19.9	<b><u>237</u></b>	<b><u>20.0</u></b>	1	236	20.0	236	20.0	<b><u>236</u></b>	<b><u>20.0</u></b>
620.omnetpp_s	56	197	8.26	197	8.29	<b><u>197</u></b>	<b><u>8.26</u></b>	1	195	8.36	196	8.31	<b><u>195</u></b>	<b><u>8.35</u></b>
623.xalancbmk_s	56	104	13.6	103	13.7	<b><u>104</u></b>	<b><u>13.7</u></b>	56	104	13.6	103	13.7	<b><u>104</u></b>	<b><u>13.7</u></b>
625.x264_s	56	107	16.5	<b><u>107</u></b>	<b><u>16.5</u></b>	107	16.4	1	107	16.5	106	16.6	<b><u>107</u></b>	<b><u>16.5</u></b>
631.deepsjeng_s	56	<b><u>231</u></b>	<b><u>6.20</u></b>	230	6.23	232	6.17	56	<b><u>231</u></b>	<b><u>6.20</u></b>	230	6.23	232	6.17
641.leela_s	56	<b><u>307</u></b>	<b><u>5.55</u></b>	308	5.54	306	5.57	1	308	5.54	<b><u>306</u></b>	<b><u>5.57</u></b>	305	5.59
648.exchange2_s	56	131	22.5	131	22.4	<b><u>131</u></b>	<b><u>22.4</u></b>	1	131	22.5	<b><u>131</u></b>	<b><u>22.5</u></b>	131	22.5
657.xz_s	56	256	24.1	<b><u>257</u></b>	<b><u>24.1</u></b>	258	24.0	56	<b><u>257</u></b>	<b><u>24.1</u></b>	258	24.0	257	24.1

SPECspeed®2017\_int\_base = **12.0**

SPECspeed®2017\_int\_peak = **12.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-55"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/amd\_speed\_aocc300\_milan\_B\_lib/lib;/home/cpu2017/amd\_speed  
\_aocc300\_milan\_B\_lib/lib32:"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "592M"  
OMP\_THREAD\_LIMIT = "56"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-55"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using opensUSE 15.2

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Nov-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

### General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
 jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

SMT Mode set to Disabled  
 NUMA nodes per socket set to NPS1  
 ACPI SRAT L3 Cache As NUMA Domain set to Enabled  
 DRAM Scrub Time set to Disabled  
 Determinism Slider set to Power  
 L1 Stream HW Prefetcher set to Enabled  
 APBDIS set to 1

sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
 running on localhost Sat Nov 27 00:40:50 2021

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7663 56-Core Processor
  1 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 56
  siblings  : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
60 61 62
```

```
From lscpu from util-linux 2.36.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

**CPU2017 License:** 9019

**Test Date:** Nov-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Jun-2021

### Platform Notes (Continued)

```

CPU(s): 56
On-line CPU(s) list: 0-55
Thread(s) per core: 1
Core(s) per socket: 56
Socket(s): 1
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7663 56-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 1795.208
CPU max MHz: 2000.0000
CPU min MHz: 1500.0000
BogoMIPS: 3992.40
Virtualization: AMD-V
L1d cache: 1.8 MiB
L1i cache: 1.8 MiB
L2 cache: 28 MiB
L3 cache: 256 MiB
NUMA node0 CPU(s): 0-6
NUMA node1 CPU(s): 7-13
NUMA node2 CPU(s): 14-20
NUMA node3 CPU(s): 21-27
NUMA node4 CPU(s): 28-34
NUMA node5 CPU(s): 35-41
NUMA node6 CPU(s): 42-48
NUMA node7 CPU(s): 49-55
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

### Platform Notes (Continued)

```

bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx
smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov
succor smca fsrm

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.8M	8	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	512K	28M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6
node 0 size: 128838 MB
node 0 free: 128655 MB
node 1 cpus: 7 8 9 10 11 12 13
node 1 size: 129021 MB
node 1 free: 128757 MB
node 2 cpus: 14 15 16 17 18 19 20
node 2 size: 128988 MB
node 2 free: 128735 MB
node 3 cpus: 21 22 23 24 25 26 27
node 3 size: 129021 MB
node 3 free: 128885 MB
node 4 cpus: 28 29 30 31 32 33 34
node 4 size: 129021 MB
node 4 free: 128835 MB
node 5 cpus: 35 36 37 38 39 40 41
node 5 size: 129021 MB
node 5 free: 128879 MB
node 6 cpus: 42 43 44 45 46 47 48
node 6 size: 129021 MB
node 6 free: 128865 MB
node 7 cpus: 49 50 51 52 53 54 55
node 7 size: 116908 MB
node 7 free: 116717 MB
node distances:
node  0  1  2  3  4  5  6  7

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

### Platform Notes (Continued)

```

0:  10  11  11  11  11  11  11  11
1:  11  10  11  11  11  11  11  11
2:  11  11  10  11  11  11  11  11
3:  11  11  11  10  11  11  11  11
4:  11  11  11  11  10  11  11  11
5:  11  11  11  11  11  10  11  11
6:  11  11  11  11  11  11  10  11
7:  11  11  11  11  11  11  11  10

```

From /proc/meminfo

```

MemTotal:      1044320872 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"

```

uname -a:

```

Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):      Not affected
CVE-2018-3620 (L1 Terminal Fault):   Not affected
Microarchitectural Data Sampling:   Not affected
CVE-2017-5754 (Meltdown):           Not affected
CVE-2018-3639 (Speculative Store Bypass):
Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):
Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):
Mitigation: Full AMD retpoline,
IBPB: conditional, IBRS_FW, STIBP:
disabled, RSB filling

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

**CPU2017 License:** 9019

**Test Date:** Nov-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Jun-2021

### Platform Notes (Continued)

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected  
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Nov 25 12:50

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	223G	11G	213G	5%	/

```

From /sys/devices/virtual/dmi/id
Vendor:          Cisco Systems Inc
Product:         UCSC-C225-M6N
Serial:          WZP25230TMR

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
8x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200

```

BIOS:
  BIOS Vendor:      Cisco Systems, Inc.
  BIOS Version:     C225M6.4.2.1c.0.0806211349
  BIOS Date:        08/06/2021
  BIOS Revision:    5.22

```

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
          |
=====

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
          |
=====

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Nov-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

### Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

-----  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

### Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

### Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Nov-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Base Optimization Flags

### C benchmarks:

```

-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

```

### C++ benchmarks:

```

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti

```

### Fortran benchmarks:

```

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti

```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true -mllvm -function-specialize  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Nov-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
620.omnetpp_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_int\_base = 12.0

Cisco UCS C225 M6 (AMD EPYC 7663 56-Core)

SPECspeed®2017\_int\_peak = 12.0

**CPU2017 License:** 9019

**Test Date:** Nov-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Jun-2021

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-27 03:40:50-0500.

Report generated on 2021-12-22 12:37:23 by CPU2017 PDF formatter v6442.

Originally published on 2021-12-21.