



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

**SPECrate®2017\_fp\_base = 209**

**SPECrate®2017\_fp\_peak = 215**

CPU2017 License: 9016


**Test Date:** Jan-2022

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** May-2021

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Mar-2021

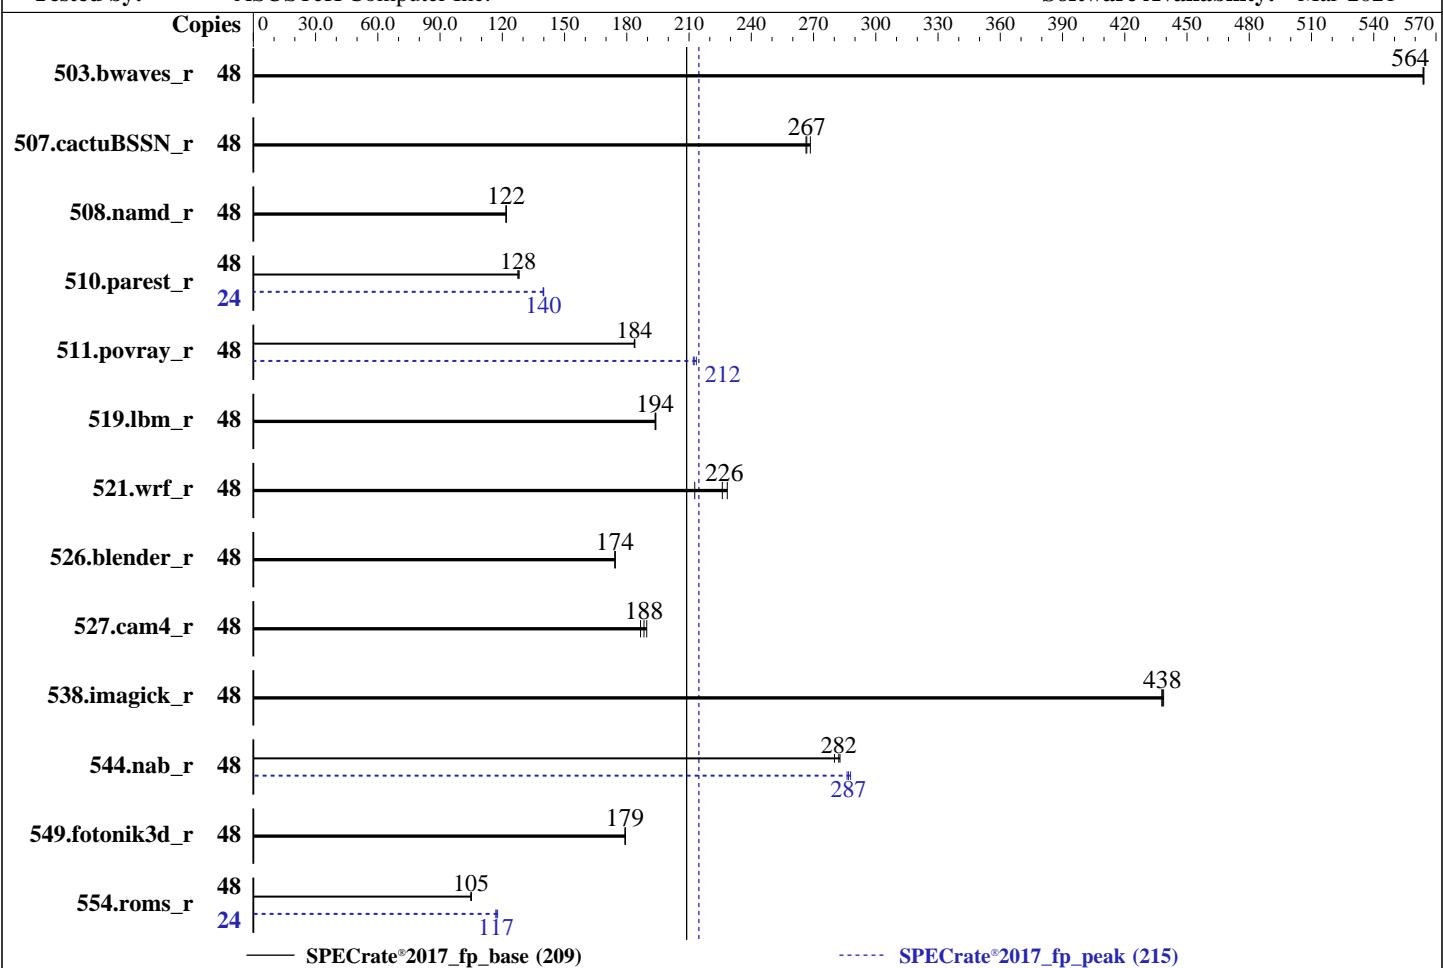

### Hardware

CPU Name: Intel Xeon Silver 4310  
Max MHz: 3300  
Nominal: 2100  
Enabled: 24 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 18 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)  
Storage: 1 x 4 TB PCIE NVME SSD  
Other: None

### OS:

Red Hat Enterprise Linux release 8.3 (Ootpa)  
4.18.0-240.22.1.el8\_3.x86\_64

### Compiler:

C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux

### Parallel:

No

### Firmware:

Version 0504 released May-2021

### File System:

xfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

64-bit

### Other:

jemalloc memory allocator V5.0.1

### Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

**SPECrate®2017\_fp\_base = 209**

**SPECrate®2017\_fp\_peak = 215**

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	<b>854</b>	<b>564</b>	853	564	854	564	48	<b>854</b>	<b>564</b>	853	564	854	564	854	564
507.cactusBSSN_r	48	228	266	226	268	<b>228</b>	<b>267</b>	48	228	266	226	268	<b>228</b>	<b>267</b>		
508.namd_r	48	374	122	374	122	<b>374</b>	<b>122</b>	48	374	122	374	122	<b>374</b>	<b>122</b>		
510.parest_r	48	980	128	984	128	<b>984</b>	<b>128</b>	24	449	140	<b>449</b>	<b>140</b>			450	140
511.povray_r	48	610	184	610	184	<b>610</b>	<b>184</b>	48	529	212	<b>527</b>	<b>212</b>			525	214
519.lbm_r	48	261	194	<b>261</b>	<b>194</b>	261	194	48	261	194	<b>261</b>	<b>194</b>			261	194
521.wrf_r	48	505	213	<b>476</b>	<b>226</b>	471	228	48	505	213	<b>476</b>	<b>226</b>			471	228
526.blender_r	48	419	174	<b>419</b>	<b>174</b>	419	174	48	419	174	<b>419</b>	<b>174</b>			419	174
527.cam4_r	48	450	187	443	190	<b>446</b>	<b>188</b>	48	450	187	443	190	<b>446</b>	<b>188</b>		
538.imagick_r	48	<b>272</b>	<b>438</b>	272	439	273	438	48	<b>272</b>	<b>438</b>	272	439	273	438		
544.nab_r	48	286	283	288	280	<b>286</b>	<b>282</b>	48	<b>282</b>	<b>287</b>	281	288	282	286		
549.fotonik3d_r	48	1043	179	<b>1044</b>	<b>179</b>	1044	179	48	1043	179	<b>1044</b>	<b>179</b>	1044	179		
554.roms_r	48	726	105	<b>726</b>	<b>105</b>	728	105	24	326	117	324	118	<b>326</b>	<b>117</b>		

**SPECrate®2017\_fp\_base = 209**

**SPECrate®2017\_fp\_peak = 215**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpul18/lib/intel64:/home/cpul18/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## General Notes (Continued)

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

SNC = Enable SNC2 (2-clusters)

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

```
Sysinfo program /home/cpu118/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Wed Jan  5 16:26:45 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11

From lscpu from util-linux 2.32.1:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Platform Notes (Continued)

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 48  
On-line CPU(s) list: 0-47  
Thread(s) per core: 2  
Core(s) per socket: 12  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 106  
Model name: Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz  
Stepping: 6  
CPU MHz: 1114.525  
CPU max MHz: 3300.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 48K  
L1i cache: 32K  
L2 cache: 1280K  
L3 cache: 18432K  
NUMA node0 CPU(s): 0-5,24-29  
NUMA node1 CPU(s): 6-11,30-35  
NUMA node2 CPU(s): 12-17,36-41  
NUMA node3 CPU(s): 18-23,42-47  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperfmpf perf\_pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect wbnoinvd dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpocntdq la57 rdpid md\_clear pconfig flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 18432 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Platform Notes (Continued)

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 254853 MB
node 0 free: 257020 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 255088 MB
node 1 free: 257417 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 255172 MB
node 2 free: 257296 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 255272 MB
node 3 free: 257258 MB
node distances:
node   0   1   2   3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10
```

```
From /proc/meminfo
MemTotal:      1056479804 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/sbin/tuned-adm active
  Current active profile: throughput-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
  performance
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-240.22.1.el8_3.x86_64 #1 SMP Thu Mar 25 14:36:04
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Platform Notes (Continued)

EDT 2021 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jan 5 05:50

SPEC is set to: /home/cpu118

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	3.6T	31G	3.6T	1%	/home

From /sys/devices/virtual/dmi/id

Vendor:	ASUSTeK COMPUTER INC.
Product:	RS700-E10-RS12U
Product Family:	Server

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x NO DIMM NO DIMM
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2666

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	0504
BIOS Date:	05/26/2021
BIOS Revision:	5.4

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpcicc

526.blender\_r: icpxicx

Benchmarks using Fortran, C, and C++:

icpxicxifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -fllto  
-Ofast -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fllto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

SPECrate®2017\_fp\_base = 209

SPECrate®2017\_fp\_peak = 215

CPU2017 License: 9016

Test Date: Jan-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.10 GHz, Intel Xeon Silver 4310)

**SPECrate®2017\_fp\_base = 209**

**SPECrate®2017\_fp\_peak = 215**

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jan-2022

**Hardware Availability:** May-2021

**Software Availability:** Mar-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-01-05 16:26:44-0500.

Report generated on 2022-02-03 10:41:55 by CPU2017 PDF formatter v6442.

Originally published on 2022-02-02.