



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL365 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECrate®2017\_int\_base = 570

SPECrate®2017\_int\_peak = 599

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Jan-2022

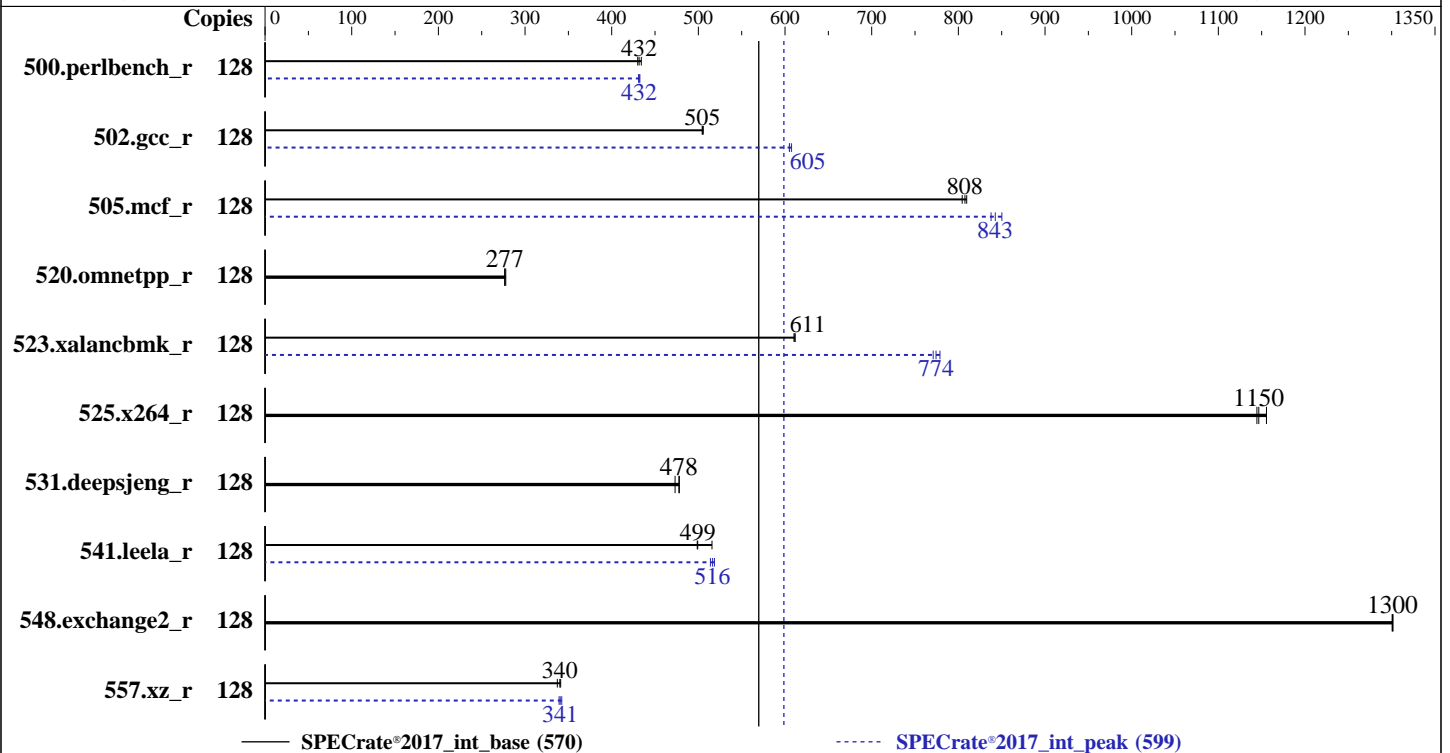

### Hardware

CPU Name: AMD EPYC 7573X  
 Max MHz: 3600  
 Nominal: 2800  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 768 MB I+D on chip per chip,  
 96 MB shared / 4 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 1 x 480 GB SATA SSD, RAID 0  
 Other: None

### Software

OS: Ubuntu 20.04.3 LTS (x86\_64)  
 Kernel 5.13.0-28-generic  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: No  
 Firmware: HPE BIOS Version A42 v2.56 02/10/2022 released Feb-2022  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECrate®2017\_int\_base = 570

SPECrate®2017\_int\_peak = 599

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Jan-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	474	430	469	434	<b>472</b>	<b>432</b>	128	473	431	471	433	<b>472</b>	<b>432</b>
502.gcc_r	128	358	506	359	504	<b>359</b>	<b>505</b>	128	<b>299</b>	<b>605</b>	298	608	300	605
505.mcf_r	128	255	810	<b>256</b>	<b>808</b>	257	804	128	243	850	<b>245</b>	<b>843</b>	247	838
520.omnetpp_r	128	<b>607</b>	<b>277</b>	605	278	607	277	128	<b>607</b>	<b>277</b>	605	278	607	277
523.xalancbmk_r	128	221	610	<b>221</b>	<b>611</b>	221	612	128	175	771	174	779	<b>175</b>	<b>774</b>
525.x264_r	128	194	1160	<b>195</b>	<b>1150</b>	196	1140	128	194	1160	<b>195</b>	<b>1150</b>	196	1140
531.deepsjeng_r	128	<b>307</b>	<b>478</b>	310	473	307	478	128	<b>307</b>	<b>478</b>	310	473	307	478
541.leela_r	128	411	516	425	499	<b>425</b>	<b>499</b>	128	412	514	409	519	<b>410</b>	<b>516</b>
548.exchange2_r	128	258	1300	<b>258</b>	<b>1300</b>	258	1300	128	258	1300	<b>258</b>	<b>1300</b>	258	1300
557.xz_r	128	405	341	410	337	<b>406</b>	<b>340</b>	128	404	342	<b>406</b>	<b>341</b>	407	339

SPECrate®2017\_int\_base = 570

SPECrate®2017\_int\_peak = 599

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECrate®2017\_int\_base = 570

SPECrate®2017\_int\_peak = 599

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017\_rate/amd\_rate\_aocc320\_milanx\_A\_lib/lib;/home/cpu2017\_rate  
/amd\_rate\_aocc320\_milanx\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:  
MALLOC\_CONF = "thp:never"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Memory Interleaving Mode set to Disabled

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Platform Notes (Continued)

Thermal Configuration set to Maximum Cooling  
Infinity Fabric Power Management set to Disabled  
Infinity Fabric Performance State set to P0  
Workload Profile set to Custom  
L2 HW Prefetcher set to Disabled

The system date and time as discovered by sysinfo is incorrect as the time was not updated prior to the run. The test\_date field shows an accurate date for the result.

The system ROM used for this result contains microcode version 0x 0A001227h for the AMD EPYC 7nn3X family of processors. The reference code/AGESA version used in this ROM is version MilanPI 1.0.0.8.

Sysinfo program /home/cpu2017\_rate/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on admin1-ProLiant-DL365-Gen10-Plus Mon Jan 10 10:30:46 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7573X 32-Core Processor  
2 "physical id"s (chips)  
128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 32  
siblings : 64  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31

From lscpu from util-linux 2.34:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 48 bits physical, 48 bits virtual  
CPU(s): 128  
On-line CPU(s) list: 0-127  
Thread(s) per core: 2  
Core(s) per socket: 32  
Socket(s): 2  
NUMA node(s): 16  
Vendor ID: AuthenticAMD  
CPU family: 25

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Platform Notes (Continued)

```

Model: 1
Model name: AMD EPYC 7573X 32-Core Processor
Stepping: 2
CPU MHz: 2794.703
BogoMIPS: 5589.40
Virtualization: AMD-V
L1d cache: 2 MiB
L1i cache: 2 MiB
L2 cache: 32 MiB
L3 cache: 1.5 GiB
NUMA node0 CPU(s): 0-3,64-67
NUMA node1 CPU(s): 4-7,68-71
NUMA node2 CPU(s): 8-11,72-75
NUMA node3 CPU(s): 12-15,76-79
NUMA node4 CPU(s): 16-19,80-83
NUMA node5 CPU(s): 20-23,84-87
NUMA node6 CPU(s): 24-27,88-91
NUMA node7 CPU(s): 28-31,92-95
NUMA node8 CPU(s): 32-35,96-99
NUMA node9 CPU(s): 36-39,100-103
NUMA node10 CPU(s): 40-43,104-107
NUMA node11 CPU(s): 44-47,108-111
NUMA node12 CPU(s): 48-51,112-115
NUMA node13 CPU(s): 52-55,116-119
NUMA node14 CPU(s): 56-59,120-123
NUMA node15 CPU(s): 60-63,124-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hwp_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Platform Notes (Continued)

cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr rdpru wbnoinvd amd\_ppin arat  
npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists  
pausefilter pfthreshold v\_vmsave\_vmload vgif v\_spec\_ctrl umip pku ospke vaes  
vpcimulqdq rdpid overflow\_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	2M	8	Data	1
L1i	32K	2M	8	Instruction	1
L2	512K	32M	8	Unified	2
L3	96M	1.5G	16	Unified	3

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 128710 MB
node 0 free: 128121 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 129019 MB
node 1 free: 128878 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 129021 MB
node 2 free: 128740 MB
node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 129020 MB
node 3 free: 128803 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 129021 MB
node 4 free: 128919 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 129020 MB
node 5 free: 128870 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 129021 MB
node 6 free: 128910 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 128975 MB
node 7 free: 128871 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 129021 MB
node 8 free: 128926 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 129020 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Platform Notes (Continued)

```

node 9 free: 128925 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 129021 MB
node 10 free: 128674 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 129020 MB
node 11 free: 128774 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 129021 MB
node 12 free: 128912 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 129020 MB
node 13 free: 128862 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 129021 MB
node 14 free: 128866 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 129015 MB
node 15 free: 128837 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
6:  12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10: 32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11: 32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12: 32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13: 32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11
15: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10

```

```

From /proc/meminfo
MemTotal:      2113511896 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/usr/bin/lsb_release -d

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Platform Notes (Continued)

Ubuntu 20.04.3 LTS

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.3 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.3 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux admin1-ProLiant-DL365-Gen10-Plus 5.13.0-28-generic #31~20.04.1-Ubuntu SMP Wed
Jan 19 14:08:10 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Jan 10 10:27

```
SPEC is set to: /home/cpu2017_rate
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       ext4  439G   40G  377G  10% /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL365 Gen10 Plus
Product Family: ProLiant
Serial:          CN70430NKR
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

**Memory:**

9x Hynix HMABAGL7ABR4N-XN 128 GB 4 rank 3200  
7x Samsung M386AAG40AM3-CWE 128 GB 4 rank 3200  
16x UNKNOWN NOT AVAILABLE

**BIOS:**

BIOS Vendor: HPE  
BIOS Version: A42  
BIOS Date: 02/10/2022  
BIOS Revision: 2.56  
Firmware Revision: 2.50

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Compiler Version Notes (Continued)

LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 523.xalancbmk\_r(peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 523.xalancbmk\_r(peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECrate®2017\_int\_base = 570

SPECrate®2017\_int\_peak = 599

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Compiler Version Notes (Continued)

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECrate®2017\_int\_base = 570

SPECrate®2017\_int\_peak = 599

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Jan-2022

## Base Portability Flags (Continued)

548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp  
-flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM  
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays  
-mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM  
-ffast-math -mllvm -enable-partial-unswitch  
-mllvm -unroll-threshold=100 -finline-aggressive  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false  
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination  
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM  
-ffast-math -z muldefs -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2  
(2.80 GHz, AMD EPYC 7573X)

SPECrate®2017\_int\_base = 570

SPECrate®2017\_int\_peak = 599

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Jan-2022

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-fprofile-instr-generate(pass 1)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Jan-2022

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

```
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

502.gcc\_r: -m32 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf\_r: -m64 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**  
(2.80 GHz, AMD EPYC 7573X)

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Jan-2022

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument
-L/spo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument
-L/spo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen10 Plus v2**

**(2.80 GHz, AMD EPYC 7573X)**

**SPECrate®2017\_int\_base = 570**

**SPECrate®2017\_int\_peak = 599**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Jan-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-01-10 00:00:46-0500.

Report generated on 2022-04-01 13:23:16 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.