



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

**SPECrate®2017\_int\_base = 718**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 6488


**Test Date:** Jul-2022

Test Sponsor: xFusion

**Hardware Availability:** Sep-2020

Tested by: xFusion

**Software Availability:** Sep-2021

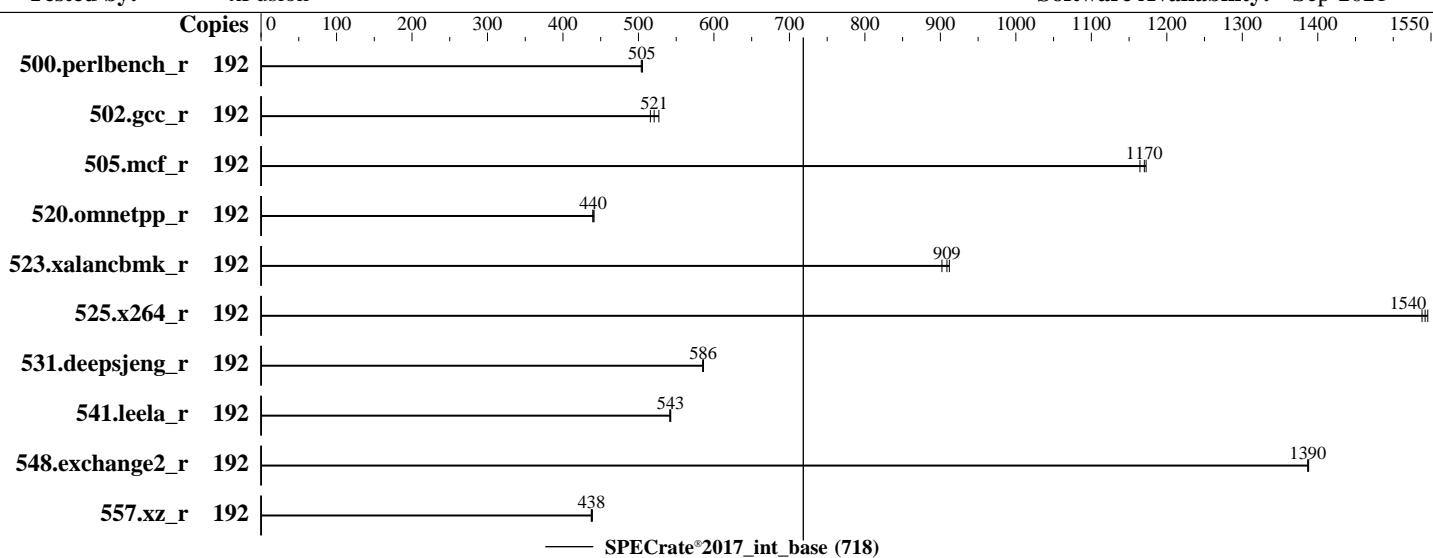

— SPECrate®2017\_int\_base (718)

### Hardware

CPU Name: Intel Xeon Platinum 8360H  
 Max MHz: 4200  
 Nominal: 3000  
 Enabled: 96 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### OS:

Red Hat Enterprise Linux release 8.3 (Ootpa)  
4.18.0-240.el8.x86\_64

### Compiler:

C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++ Compiler Build 20210924 for Linux;  
 Fortran: Version 2021.4.0 of Intel Fortran Compiler Classic Build 20210910 for Linux

### Parallel:

No

### Firmware:

Version 0.87 Released May-2022

### File System:

xfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

Not Applicable

### Other:

None

### Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage

### Software



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_int\_base = 718**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 6488

Test Date: Jul-2022

Test Sponsor: xFusion

Hardware Availability: Sep-2020

Tested by: xFusion

Software Availability: Sep-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	607	504	605	505	<b>606</b>	<b>505</b>									
502.gcc_r	192	527	516	<b>522</b>	<b>521</b>	516	527									
505.mcf_r	192	<b>265</b>	<b>1170</b>	265	1170	266	1160									
520.omnetpp_r	192	573	440	571	441	<b>573</b>	<b>440</b>									
523.xalancbmk_r	192	225	902	<b>223</b>	<b>909</b>	222	912									
525.x264_r	192	219	1540	217	1550	<b>218</b>	<b>1540</b>									
531.deepsjeng_r	192	376	585	<b>376</b>	<b>586</b>	375	586									
541.leela_r	192	586	543	<b>586</b>	<b>543</b>	587	541									
548.exchange2_r	192	362	1390	363	1390	<b>363</b>	<b>1390</b>									
557.xz_r	192	<b>474</b>	<b>438</b>	474	437	472	439									

**SPECrate®2017\_int\_base = 718**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/spec20214/lib/intel64:/spec20214/lib/ia32:/spec20214/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.3

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

xFusion 2488H V6 (Intel Xeon Platinum 8360H)

SPECrate®2017\_int\_base = 718

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Jul-2022

Test Sponsor: xFusion

Hardware Availability: Sep-2020

Tested by: xFusion

Software Availability: Sep-2021

## General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enabled

Sysinfo program /spec20214/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Thu Jul 7 11:13:12 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8360H CPU @ 3.00GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 192

On-line CPU(s) list: 0-191

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 4

NUMA node(s): 8

Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

xFusion 2488H V6 (Intel Xeon Platinum 8360H)

SPECrate®2017\_int\_base = 718

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Jul-2022

Test Sponsor: xFusion

Hardware Availability: Sep-2020

Tested by: xFusion

Software Availability: Sep-2021

## Platform Notes (Continued)

CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8360H CPU @ 3.00GHz  
Stepping: 11  
CPU MHz: 3800.182  
BogoMIPS: 6000.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 33792K  
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116  
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119  
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140  
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143  
NUMA node4 CPU(s): 48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164  
NUMA node5 CPU(s): 51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167  
NUMA node6 CPU(s): 72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188  
NUMA node7 CPU(s): 75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xttopology nonstop\_tsc cpuid aperfmpf perf\_pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local avx512\_bf16 dtherm ida arat pln pts hwp\_epp pku ospke avx512\_vnni md\_clear flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 33792 KB

From numactl --hardware  
WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116  
node 0 size: 191469 MB  
node 0 free: 191230 MB  
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118 119  
node 1 size: 193464 MB  
node 1 free: 193263 MB  
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134 138 139 140

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 718

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Jul-2022

Test Sponsor: xFusion

Hardware Availability: Sep-2020

Tested by: xFusion

Software Availability: Sep-2021

## Platform Notes (Continued)

```
node 2 size: 193526 MB
node 2 free: 193364 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
141 142 143
node 3 size: 193522 MB
node 3 free: 192873 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158
162 163 164
node 4 size: 193492 MB
node 4 free: 193333 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161
165 166 167
node 5 size: 193528 MB
node 5 free: 193380 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182
186 187 188
node 6 size: 193528 MB
node 6 free: 193375 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185
189 190 191
node 7 size: 193525 MB
node 7 free: 193370 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 20 20 20 20 20 20
  1: 11 10 20 20 20 20 20 20
  2: 20 20 10 11 20 20 20 20
  3: 20 20 11 10 20 20 20 20
  4: 20 20 20 20 10 11 20 20
  5: 20 20 20 20 11 10 20 20
  6: 20 20 20 20 20 20 10 11
  7: 20 20 20 20 20 20 11 10
```

From /proc/meminfo

```
MemTotal:      1583412844 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active
Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID\_LIKE="fedora"

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 718

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Jul-2022

Test Sponsor: xFusion

Hardware Availability: Sep-2020

Tested by: xFusion

Software Availability: Sep-2021

## Platform Notes (Continued)

```
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jul 7 11:11

SPEC is set to: /spec20214

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	xfs	270G	124G	147G	46%	/

From /sys/devices/virtual/dmi/id

Vendor:	xFusion
Product:	2488H V6
Product Family:	Cedar Island
Serial:	2102313CWY10MA000018

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

xFusion 2488H V6 (Intel Xeon Platinum 8360H)

SPECrate®2017\_int\_base = 718

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Date: Jul-2022

Test Sponsor: xFusion

Hardware Availability: Sep-2020

Tested by: xFusion

Software Availability: Sep-2021

## Platform Notes (Continued)

BIOS:

BIOS Vendor: XFUSION  
BIOS Version: 0.87  
BIOS Date: 05/10/2022

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
-----

=====
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      | 541.leela_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
-----

=====
Fortran | 548.exchange2_r(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## xFusion

xFusion 2488H V6 (Intel Xeon Platinum 8360H)

SPECrate®2017\_int\_base = 718

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2022

Hardware Availability: Sep-2020

Software Availability: Sep-2021

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_int\_base = 718

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488

**Test Date:** Jul-2022

**Test Sponsor:** xFusion

**Hardware Availability:** Sep-2020

**Tested by:** xFusion

**Software Availability:** Sep-2021

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CPX-V1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CPX-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-07-06 23:13:12-0400.

Report generated on 2022-08-03 10:46:08 by CPU2017 PDF formatter v6442.

Originally published on 2022-08-03.