



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECSpeed®2017_fp_base = 155

SPECSpeed®2017_fp_peak = 155

CPU2017 License: 006042


Test Date: Sep-2022

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

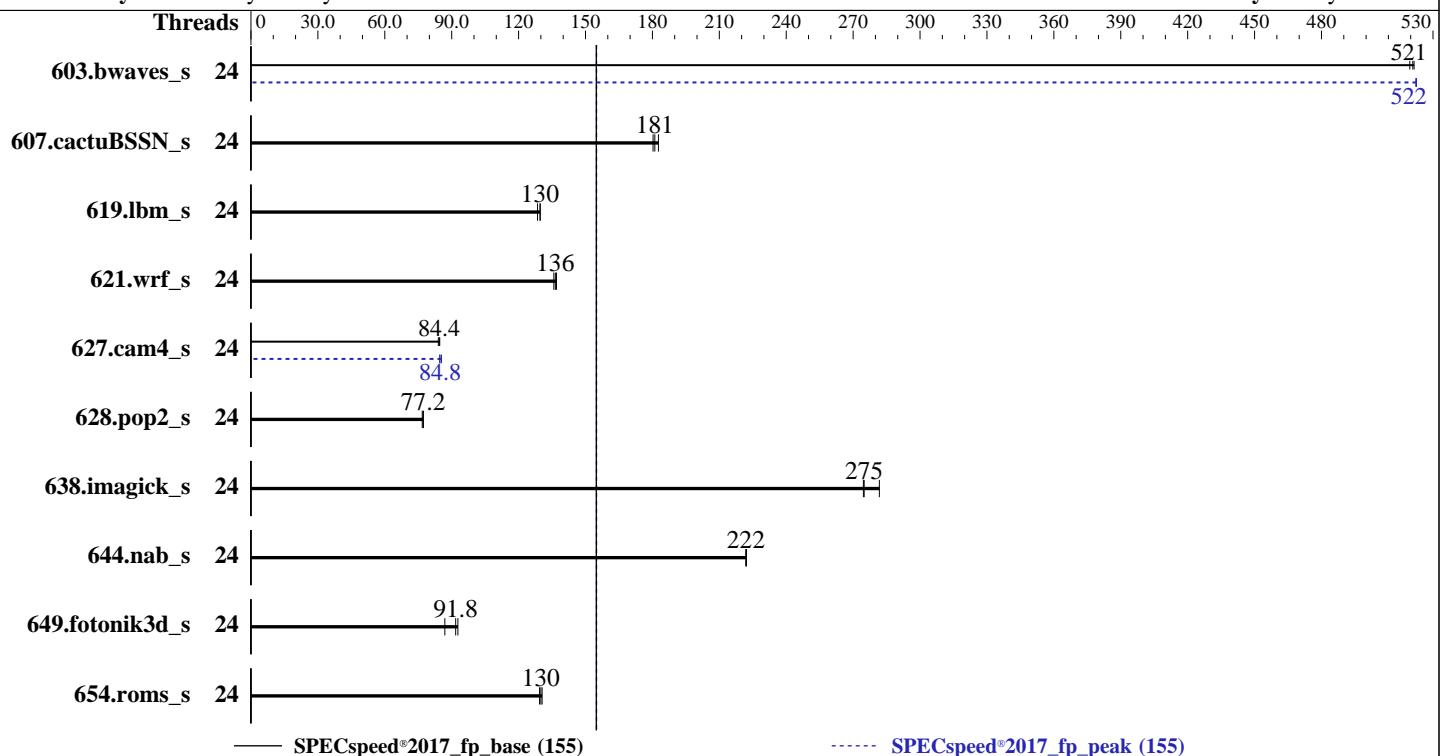

— SPECSpeed®2017_fp_base (155)

----- SPECSpeed®2017_fp_peak (155)

Hardware

CPU Name: Intel Xeon Gold 5317
Max MHz: 3600
Nominal: 3000
Enabled: 24 cores, 2 chips, 2 threads/core
Orderable: 1,2 Chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 18 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage: 1 x 512 GB NVMe SSD
Other: None

OS:

Red Hat Enterprise Linux release 8.5 (Ootpa)
Kernel 4.18.0-348.el8.x86_64

Compiler:

C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;

Parallel:

Yes

Firmware:

Version SE5C620.86B.01.01.0004.2110190142 released Oct-2021

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECSpeed®2017_fp_base = 155

SPECSpeed®2017_fp_peak = 155

CPU2017 License: 006042

Test Date: Sep-2022

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	114	520	<u>113</u>	<u>521</u>	113	522	24	113	523	113	522	<u>113</u>	<u>522</u>
607.cactuBSSN_s	24	91.2	183	92.5	180	92.1	181	24	91.2	183	92.5	180	92.1	181
619.lbm_s	24	40.8	128	40.4	130	40.4	130	24	40.8	128	40.4	130	40.4	130
621.wrf_s	24	96.9	136	96.5	137	97.4	136	24	96.9	136	96.5	137	97.4	136
627.cam4_s	24	105	84.4	105	84.6	106	84.0	24	104	85.4	105	84.6	105	84.8
628.pop2_s	24	154	77.2	155	76.8	154	77.3	24	154	77.2	155	76.8	154	77.3
638.imagick_s	24	52.5	275	51.2	282	52.5	275	24	52.5	275	51.2	282	52.5	275
644.nab_s	24	78.7	222	78.7	222	78.6	222	24	78.7	222	78.7	222	78.6	222
649.fotonik3d_s	24	98.3	92.8	105	86.9	99.3	91.8	24	98.3	92.8	105	86.9	99.3	91.8
654.roms_s	24	121	131	<u>121</u>	<u>130</u>	122	129	24	121	131	<u>121</u>	<u>130</u>	122	129

SPECSpeed®2017_fp_base = 155

SPECSpeed®2017_fp_peak = 155

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECspeed®2017_fp_base = 155

SPECspeed®2017_fp_peak = 155

CPU2017 License: 006042

Test Date: Sep-2022

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
KTI Prefetch = Enable
LLC Dead Line Alloc = Enable
Hyper-Threading = Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on icelakespec Thu Sep 1 04:55:54 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 12
  siblings   : 24
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11
```

From lscpu from util-linux 2.32.1:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   12
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
CPU family:            6
Model:                 106
Model name:            Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
BIOS Model name:       Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECspeed®2017_fp_base = 155

SPECspeed®2017_fp_peak = 155

CPU2017 License: 006042

Test Date: Sep-2022

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

Platform Notes (Continued)

```

Stepping: 6
CPU MHz: 3000.000
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 6000.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 18432K
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust sgx bmil hle avx2 smep bmi2
erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc
cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect wbnoinvd dtherm ida arat
pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 18432 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 257632 MB
node 0 free: 246289 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 258045 MB
node 1 free: 249024 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 258045 MB
node 2 free: 243785 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 258042 MB
node 3 free: 248713 MB
node distances:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECSpeed®2017_fp_base = 155

SPECSpeed®2017_fp_peak = 155

CPU2017 License: 006042

Test Date: Sep-2022

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

Platform Notes (Continued)

```
node   0   1   2   3
 0:  10  11  20  20
 1:  11  10  20  20
 2:  20  20  10  11
 3:  20  20  11  10
```

From /proc/meminfo

```
MemTotal:      1056528048 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active
 Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
 performance

From /etc/*release* /etc/*version*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.5 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.5"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos
```

uname -a:

```
Linux icelakespec 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECSpeed®2017_fp_base = 155

SPECSpeed®2017_fp_peak = 155

CPU2017 License: 006042

Test Date: Sep-2022

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Aug 31 05:57

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	402G	165G	237G	42%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Tyrone_Systems
Product:	Tyrone_Camarero_IDI100C2R-28
Product Family:	Family
Serial:	2X22462203

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor:	Intel Corporation
BIOS Version:	SE5C620.86B.01.01.0004.2110190142
BIOS Date:	10/19/2021

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECspeed®2017_fp_base = 155

SPECspeed®2017_fp_peak = 155

CPU2017 License: 006042

Test Date: Sep-2022

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

Compiler Version Notes (Continued)

Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECspeed®2017_fp_base = 155

SPECspeed®2017_fp_peak = 155

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -g -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECSPEED®2017_fp_base = 155

SPECSPEED®2017_fp_peak = 155

CPU2017 License: 006042

Test Date: Sep-2022

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -g -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -g -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(3.00 GHz, Intel Xeon Gold 5317)

SPECSpeed®2017_fp_base = 155

SPECSpeed®2017_fp_peak = 155

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2022

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Optimization Flags (Continued)

627.cam4_s (continued):

```
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactusBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-09-01 04:55:53-0400.

Report generated on 2022-09-27 17:12:33 by CPU2017 PDF formatter v6442.

Originally published on 2022-09-27.