



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECspeed®2017\_fp\_base = 257

SPECspeed®2017\_fp\_peak = 258

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2022

Hardware Availability: May-2021

Software Availability: May-2022

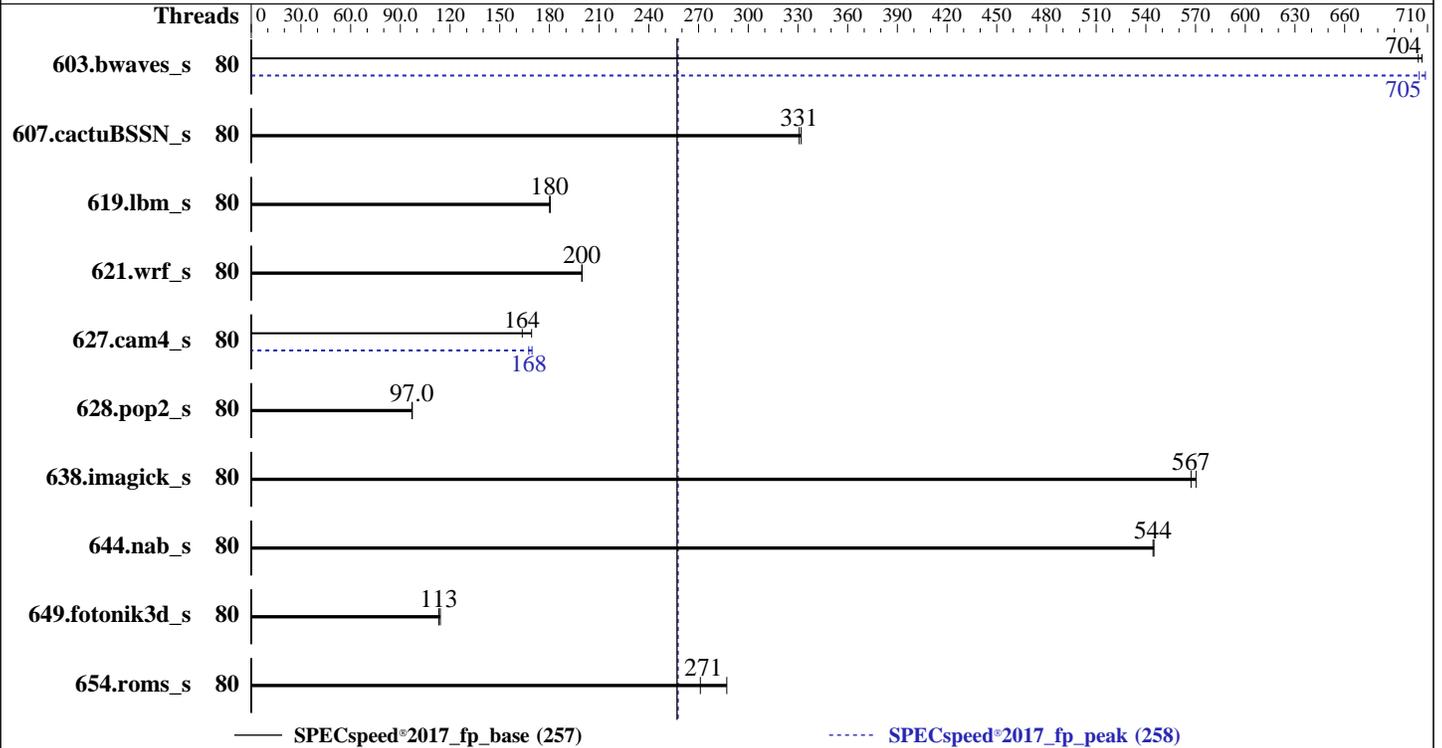

### Hardware

CPU Name: Intel Xeon Platinum 8380  
 Max MHz: 3400  
 Nominal: 2300  
 Enabled: 80 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa)  
 4.18.0-372.9.1.el8.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Version 1.6.5 released Apr-2022  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECSpeed®2017\_fp\_base = 257

SPECSpeed®2017\_fp\_peak = 258

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2022  
Hardware Availability: May-2021  
Software Availability: May-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	80	83.5	707	<b><u>83.8</u></b>	<b><u>704</u></b>			80	83.2	709	<b><u>83.7</u></b>	<b><u>705</u></b>		
607.cactuBSSN_s	80	50.2	332	<b><u>50.4</u></b>	<b><u>331</u></b>			80	50.2	332	<b><u>50.4</u></b>	<b><u>331</u></b>		
619.lbm_s	80	29.0	180	<b><u>29.1</u></b>	<b><u>180</u></b>			80	29.0	180	<b><u>29.1</u></b>	<b><u>180</u></b>		
621.wrf_s	80	66.2	200	<b><u>66.3</u></b>	<b><u>200</u></b>			80	66.2	200	<b><u>66.3</u></b>	<b><u>200</u></b>		
627.cam4_s	80	<b><u>54.2</u></b>	<b><u>164</u></b>	52.4	169			80	<b><u>52.9</u></b>	<b><u>168</u></b>	52.3	169		
628.pop2_s	80	<b><u>122</u></b>	<b><u>97.0</u></b>	122	97.2			80	<b><u>122</u></b>	<b><u>97.0</u></b>	122	97.2		
638.imagick_s	80	25.3	570	<b><u>25.4</u></b>	<b><u>567</u></b>			80	25.3	570	<b><u>25.4</u></b>	<b><u>567</u></b>		
644.nab_s	80	<b><u>32.1</u></b>	<b><u>544</u></b>	32.1	545			80	<b><u>32.1</u></b>	<b><u>544</u></b>	32.1	545		
649.fotonik3d_s	80	<b><u>80.5</u></b>	<b><u>113</u></b>	79.9	114			80	<b><u>80.5</u></b>	<b><u>113</u></b>	79.9	114		
654.roms_s	80	54.8	287	<b><u>58.1</u></b>	<b><u>271</u></b>			80	54.8	287	<b><u>58.1</u></b>	<b><u>271</u></b>		

SPECSpeed®2017\_fp\_base = 257

SPECSpeed®2017\_fp\_peak = 258

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
  1.8-ic2022.1/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECSpeed®2017\_fp\_base = 257

SPECSpeed®2017\_fp\_peak = 258

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2022

Hardware Availability: May-2021

Software Availability: May-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

DIMM Self Healing on

Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled

Logical Processor : Disabled

Optimizer Mode : Enabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C States : Autonomous

Memory Patrol Scrub : Disabled

Energy Efficiency Policy : Performance

CPU Interconnect Bus Link

Power Management : Disabled

PCI ASPM L1 Link

Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on auvcetillemlml.corp.emc.com Sat Oct 1 13:05:18 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 40

siblings : 40

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECSpeed®2017\_fp\_base = 257

SPECSpeed®2017\_fp\_peak = 258

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2022  
Hardware Availability: May-2021  
Software Availability: May-2022

## Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

From lscpu from util-linux 2.32.1:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 80
On-line CPU(s) list:   0-79
Thread(s) per core:    1
Core(s) per socket:    40
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
BIOS Model name:        Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping:               6
CPU MHz:                3400.000
CPU max MHz:            3400.0000
CPU min MHz:            800.0000
BogoMIPS:               4600.00
L1d cache:              48K
L1i cache:              32K
L2 cache:               1280K
L3 cache:               61440K
NUMA node0 CPU(s):     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78
NUMA node1 CPU(s):     1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,65,67,69,71,73,75,77,79
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr
pdc_m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep
bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm
ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
flush_lld arch_capabilities

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECspeed®2017\_fp\_base = 257

SPECspeed®2017\_fp\_peak = 258

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50  
52 54 56 58 60 62 64 66 68 70 72 74 76 78

node 0 size: 257135 MB

node 0 free: 253103 MB

node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47 49 51  
53 55 57 59 61 63 65 67 69 71 73 75 77 79

node 1 size: 258036 MB

node 1 free: 252938 MB

node distances:

```
node  0  1
  0:  10  20
  1:  20  10
```

From /proc/meminfo

```
MemTotal:      527536188 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.6 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.6"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.6 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.6 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.6 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8::baseos

uname -a:

Linux auvcetilleml1.corp.emc.com 4.18.0-372.9.1.el8.x86\_64 #1 SMP Fri Apr 15 22:12:19

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECspeed®2017\_fp\_base = 257

SPECspeed®2017\_fp\_peak = 258

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2022  
**Hardware Availability:** May-2021  
**Software Availability:** May-2022

### Platform Notes (Continued)

EDT 2022 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Oct 1 13:03

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 125G  3.6G 122G   3% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R750
Product Family: PowerEdge
Serial:          SLR7598
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
8x 002C00B3002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200
2x 002C0632002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200
1x 00AD063200AD HMAA4GR7AJR8N-XN 32 GB 2 rank 3200
5x 00CE063200CE M393A4G43AB3-CWE 32 GB 2 rank 3200
```

```
BIOS:
BIOS Vendor:    Dell Inc.
BIOS Version:   1.6.5
BIOS Date:      04/15/2022
BIOS Revision:  1.6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECspeed®2017\_fp\_base = 257

SPECspeed®2017\_fp\_peak = 258

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Oct-2022  
**Hardware Availability:** May-2021  
**Software Availability:** May-2022

## Platform Notes (Continued)

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECspeed®2017\_fp\_base = 257

SPECspeed®2017\_fp\_peak = 258

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECSpeed®2017\_fp\_base = 257

SPECSpeed®2017\_fp\_peak = 258

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECspeed®2017\_fp\_base = 257

SPECspeed®2017\_fp\_peak = 258

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2022

Hardware Availability: May-2021

Software Availability: May-2022

## Peak Optimization Flags (Continued)

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.0.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.0.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECspeed®2017\_fp\_base = 257

SPECspeed®2017\_fp\_peak = 258

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2022

**Hardware Availability:** May-2021

**Software Availability:** May-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-01 14:05:18-0400.  
Report generated on 2022-10-26 10:31:55 by CPU2017 PDF formatter v6442.  
Originally published on 2022-10-25.