



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

**SPECSpeed®2017\_int\_base = 14.0**

**SPECSpeed®2017\_int\_peak = 14.1**

CPU2017 License: 3


**Test Date:** Oct-2022

**Test Sponsor:** HPE

**Hardware Availability:** Dec-2022

**Tested by:** HPE

**Software Availability:** Nov-2022

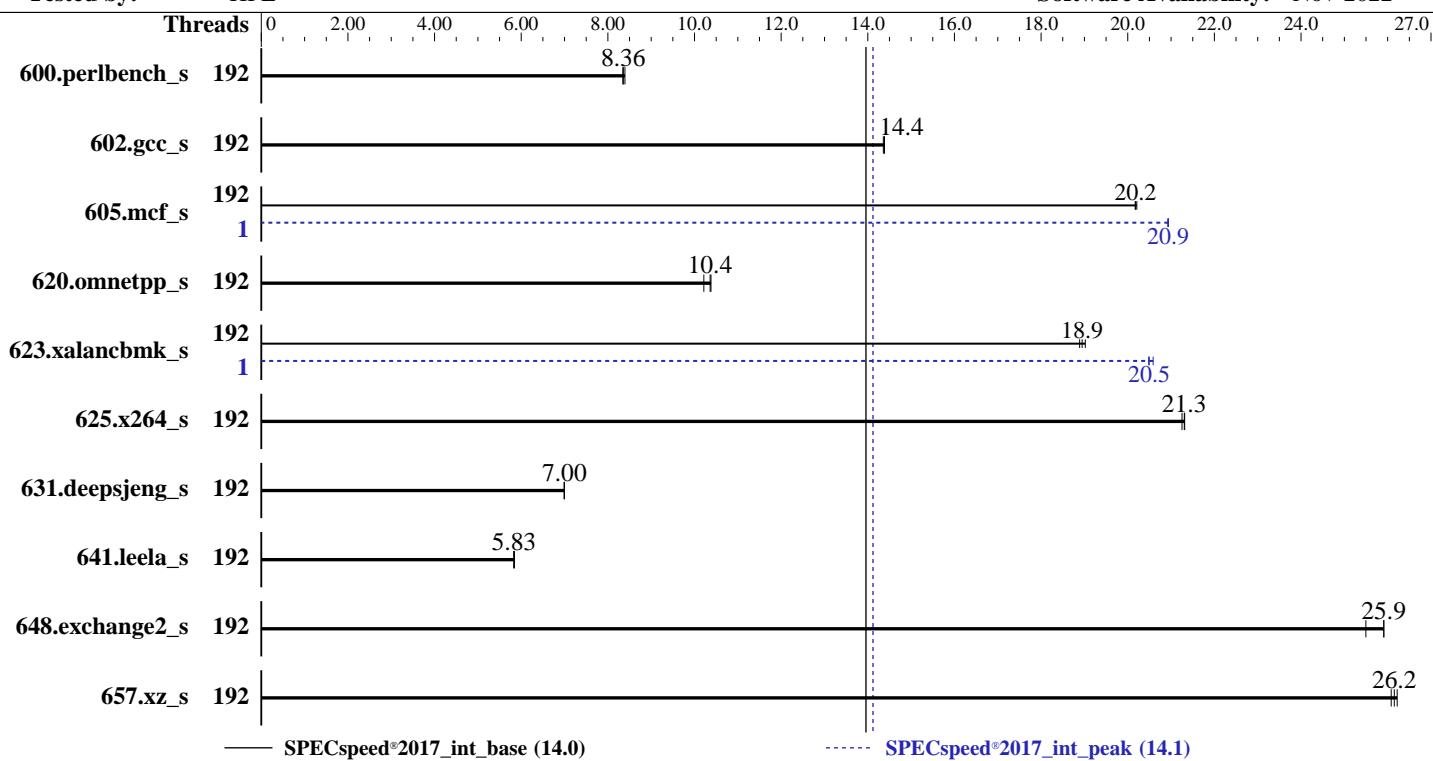

## Hardware

CPU Name: AMD EPYC 9654

Max MHz: 3700

Nominal: 2400

Enabled: 192 cores, 2 chips

Orderable: 1,2 chips

Cache L1: 32 KB I + 32 KB D on chip per core

L2: 1 MB I+D on chip per core

L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores

Other: None

Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)

Storage: 2 x 480 GB SATA SSD

Other: None

## Software

Ubuntu 22.04.1 LTS

Kernel 5.15.0-50-generic

C/C++/Fortran: Version 4.0.0 of AOCC

Parallel:

Firmware:

HPE BIOS Version v1.10 10/06/2022 released Oct-2022

File System:

System State:

Base Pointers:

Peak Pointers:

Other:

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

**SPECspeed®2017\_int\_base = 14.0**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

Test Date: Oct-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	211	8.39	<b>212</b>	<b>8.36</b>	213	8.35	192	211	8.39	<b>212</b>	<b>8.36</b>	213	8.35		
602.gcc_s	192	277	14.4	<b>277</b>	<b>14.4</b>	277	14.4	192	277	14.4	<b>277</b>	<b>14.4</b>	277	14.4		
605.mcf_s	192	234	20.2	234	20.2	<b>234</b>	<b>20.2</b>	1	225	20.9	<b>226</b>	<b>20.9</b>	226	20.9		
620.omnetpp_s	192	160	10.2	<b>157</b>	<b>10.4</b>	157	10.4	192	160	10.2	<b>157</b>	<b>10.4</b>	157	10.4		
623.xalancbmk_s	192	74.5	19.0	75.0	18.9	<b>74.8</b>	<b>18.9</b>	1	68.8	20.6	<b>69.1</b>	<b>20.5</b>	69.2	20.5		
625.x264_s	192	82.8	21.3	83.0	21.3	<b>82.8</b>	<b>21.3</b>	192	82.8	21.3	83.0	21.3	<b>82.8</b>	<b>21.3</b>		
631.deepsjeng_s	192	205	7.00	<b>205</b>	<b>7.00</b>	205	6.99	192	205	7.00	<b>205</b>	<b>7.00</b>	205	6.99		
641.leela_s	192	293	5.83	292	5.84	<b>292</b>	<b>5.83</b>	192	293	5.83	292	5.84	<b>292</b>	<b>5.83</b>		
648.exchange2_s	192	113	25.9	115	25.5	<b>113</b>	<b>25.9</b>	192	113	25.9	115	25.5	<b>113</b>	<b>25.9</b>		
657.xz_s	192	237	26.1	236	26.2	<b>236</b>	<b>26.2</b>	192	237	26.1	236	26.2	<b>236</b>	<b>26.2</b>		
<b>SPECspeed®2017_int_base = 14.0</b>																
<b>SPECspeed®2017_int_peak = 14.1</b>																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9654)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = 14.1

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-191"  
LD\_LIBRARY\_PATH = "/home/CPU2017/amd\_speed\_aocc400\_genoa\_B/lib/lib:  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "192"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

NUMA memory domains per socket set to Four memory domains per socket

Last-Level Cache (LLC) as NUMA Node set to Enabled

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

ACPI CST C2 Latency set to 18 microseconds

Memory PStates set to Disabled

Thermal Configuration set to Maximum Cooling

The system ROM used for this result contains microcode version 0xa10110d for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L2

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on admin1 Sun Oct 23 13:38:11 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 9654 96-Core Processor
  2 "physical id"s (chips)
  192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 96
siblings : 96
physical 0: cores 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23 32 33 34 35 36 37 38 39
48 49 50 51 52 53 54 55 64 65 66 67 68 69 70 71 80 81 82 83 84 85 86 87 96 97 98 99
100 101 102 103 112 113 114 115 116 117 118 119 128 129 130 131 132 133 134 135 144
145 146 147 148 149 150 151 160 161 162 163 164 165 166 167 176 177 178 179 180 181
182 183
physical 1: cores 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23 32 33 34 35 36 37 38 39
48 49 50 51 52 53 54 55 64 65 66 67 68 69 70 71 80 81 82 83 84 85 86 87 96 97 98 99
100 101 102 103 112 113 114 115 116 117 118 119 128 129 130 131 132 133 134 135 144
145 146 147 148 149 150 151 160 161 162 163 164 165 166 167 176 177 178 179 180 181
182 183
```

From lscpu from util-linux 2.37.2:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:  0-191
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9654 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   1
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

**SPECspeed®2017\_int\_base = 14.0**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

**Test Date:** Oct-2022

Test Sponsor: HPE

**Hardware Availability:** Dec-2022

Tested by: HPE

**Software Availability:** Nov-2022

## Platform Notes (Continued)

Core(s) per socket:	96
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3709.0000
CPU min MHz:	400.0000
BogoMIPS:	4792.88
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwmtx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bml1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_ll1d
Virtualization:	AMD-V
L1d cache:	6 MiB (192 instances)
L1i cache:	6 MiB (192 instances)
L2 cache:	192 MiB (192 instances)
L3 cache:	768 MiB (24 instances)
NUMA node(s):	24
NUMA node0 CPU(s):	0-7
NUMA node1 CPU(s):	8-15
NUMA node2 CPU(s):	16-23
NUMA node3 CPU(s):	24-31
NUMA node4 CPU(s):	32-39
NUMA node5 CPU(s):	40-47
NUMA node6 CPU(s):	48-55
NUMA node7 CPU(s):	56-63
NUMA node8 CPU(s):	64-71
NUMA node9 CPU(s):	72-79
NUMA node10 CPU(s):	80-87
NUMA node11 CPU(s):	88-95
NUMA node12 CPU(s):	96-103
NUMA node13 CPU(s):	104-111
NUMA node14 CPU(s):	112-119
NUMA node15 CPU(s):	120-127
NUMA node16 CPU(s):	128-135
NUMA node17 CPU(s):	136-143
NUMA node18 CPU(s):	144-151

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

**SPECspeed®2017\_int\_base = 14.0**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

**Test Date:** Oct-2022

Test Sponsor: HPE

**Hardware Availability:** Dec-2022

Tested by: HPE

**Software Availability:** Nov-2022

## Platform Notes (Continued)

NUMA node19 CPU(s):	152-159
NUMA node20 CPU(s):	160-167
NUMA node21 CPU(s):	168-175
NUMA node22 CPU(s):	176-183
NUMA node23 CPU(s):	184-191
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 24 nodes (0-23)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 31943 MB
node 0 free: 31663 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 32253 MB
node 1 free: 32112 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 32253 MB
node 2 free: 32101 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 32253 MB
node 3 free: 32100 MB
node 4 cpus: 32 33 34 35 36 37 38 39
node 4 size: 32253 MB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 4 free: 32043 MB
node 5 cpus: 40 41 42 43 44 45 46 47
node 5 size: 32253 MB
node 5 free: 32103 MB
node 6 cpus: 48 49 50 51 52 53 54 55
node 6 size: 32253 MB
node 6 free: 32005 MB
node 7 cpus: 56 57 58 59 60 61 62 63
node 7 size: 32253 MB
node 7 free: 32123 MB
node 8 cpus: 64 65 66 67 68 69 70 71
node 8 size: 32253 MB
node 8 free: 32084 MB
node 9 cpus: 72 73 74 75 76 77 78 79
node 9 size: 32253 MB
node 9 free: 32123 MB
node 10 cpus: 80 81 82 83 84 85 86 87
node 10 size: 32253 MB
node 10 free: 31997 MB
node 11 cpus: 88 89 90 91 92 93 94 95
node 11 size: 32253 MB
node 11 free: 32136 MB
node 12 cpus: 96 97 98 99 100 101 102 103
node 12 size: 32253 MB
node 12 free: 32136 MB
node 13 cpus: 104 105 106 107 108 109 110 111
node 13 size: 32218 MB
node 13 free: 32104 MB
node 14 cpus: 112 113 114 115 116 117 118 119
node 14 size: 32253 MB
node 14 free: 32141 MB
node 15 cpus: 120 121 122 123 124 125 126 127
node 15 size: 32253 MB
node 15 free: 32138 MB
node 16 cpus: 128 129 130 131 132 133 134 135
node 16 size: 32253 MB
node 16 free: 32151 MB
node 17 cpus: 136 137 138 139 140 141 142 143
node 17 size: 32253 MB
node 17 free: 32140 MB
node 18 cpus: 144 145 146 147 148 149 150 151
node 18 size: 32253 MB
node 18 free: 32138 MB
node 19 cpus: 152 153 154 155 156 157 158 159
node 19 size: 32253 MB
node 19 free: 32141 MB
node 20 cpus: 160 161 162 163 164 165 166 167
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

**SPECspeed®2017\_int\_base = 14.0**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

**Test Date:** Oct-2022

Test Sponsor: HPE

**Hardware Availability:** Dec-2022

Tested by: HPE

**Software Availability:** Nov-2022

## Platform Notes (Continued)

```
node 20 size: 32253 MB
node 20 free: 32132 MB
node 21 cpus: 168 169 170 171 172 173 174 175
node 21 size: 32200 MB
node 21 free: 32082 MB
node 22 cpus: 176 177 178 179 180 181 182 183
node 22 size: 32253 MB
node 22 free: 32142 MB
node 23 cpus: 184 185 186 187 188 189 190 191
node 23 size: 32253 MB
node 23 free: 32134 MB
node distances:
node   0    1    2    3    4    5    6    7    8    9    10   11   12   13   14   15   16   17   18   19
20   21   22   23
  0: 10  12  12  12  11  12  12  12  11  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32
  1: 12  10  12  12  12  11  12  12  12  11  12  12  32  32  32  32  32  32  32  32  32
  32  32  32
  2: 12  12  10  12  12  12  11  12  12  12  11  12  32  32  32  32  32  32  32  32  32
  32  32  32
  3: 12  12  12  10  12  12  12  11  12  12  12  11  32  32  32  32  32  32  32  32  32
  32  32  32
  4: 11  12  12  12  10  12  12  12  11  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32
  5: 12  11  12  12  12  10  12  12  12  11  12  12  32  32  32  32  32  32  32  32  32
  32  32  32
  6: 12  12  11  12  12  12  10  12  12  12  11  12  32  32  32  32  32  32  32  32  32
  32  32  32
  7: 12  12  12  11  12  12  12  10  12  12  12  11  32  32  32  32  32  32  32  32  32
  32  32  32
  8: 11  12  12  12  11  12  12  12  10  12  12  12  32  32  32  32  32  32  32  32  32
  32  32  32
  9: 12  11  12  12  12  11  12  12  12  10  12  12  32  32  32  32  32  32  32  32  32
  32  32  32
 10: 12  12  11  12  12  12  11  12  12  12  12  10  12  32  32  32  32  32  32  32  32
  32  32  32
 11: 12  12  12  11  12  12  12  11  12  12  12  10  32  32  32  32  32  32  32  32  32
  32  32  32
 12: 32  32  32  32  32  32  32  32  32  32  32  32  10  12  12  12  11  12  12  12
 11  12  12  12
 13: 32  32  32  32  32  32  32  32  32  32  32  32  12  10  12  12  11  12  12  12
 12  11  12  12
 14: 32  32  32  32  32  32  32  32  32  32  32  32  12  12  10  12  12  12  11  12
 12  12  11  12
 15: 32  32  32  32  32  32  32  32  32  32  32  32  12  12  10  12  12  12  12  11
 12  12  11  11
 16: 32  32  32  32  32  32  32  32  32  32  32  32  11  12  12  12  10  12  12  12
 12  12  11  12
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 3

Test Date: Oct-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Platform Notes (Continued)

11	12	12	12	12	12	32	32	32	32	32	32	32	32	32	32	32	12	11	12	12	12	10	12	12
17:																								
12	11	12	12																					
18:																								
12	12	11	12																					
19:																								
12	12	12	11																					
20:																								
10	12	12	12																					
21:																								
12	10	12	12																					
22:																								
12	12	10	12																					
23:																								
12	12	12	10																					

From /proc/meminfo

```
MemTotal:      792263924 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active

```
Current active profile: balanced
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

/usr/bin/lsb\_release -d

```
Ubuntu 22.04.1 LTS
```

From /etc/\*release\* /etc/\*version\*

```
debian_version: bookworm/sid
os-release:
  PRETTY_NAME="Ubuntu 22.04.1 LTS"
  NAME="Ubuntu"
  VERSION_ID="22.04"
  VERSION="22.04.1 LTS (Jammy Jellyfish)"
  VERSION_CODENAME=jammy
  ID=ubuntu
  ID_LIKE=debian
  HOME_URL="https://www.ubuntu.com/"
```

uname -a:

```
Linux admin1 5.15.0-50-generic #56-Ubuntu SMP Tue Sep 20 13:23:26 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9654)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = 14.1

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling, PBRSB-eIBRS: Not affected
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Oct 23 13:27

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	437G	142G	277G	34%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL365 Gen11
Product Family:	ProLiant
Serial:	DL365G11-001

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800

BIOS:

BIOS Vendor:	HPE
BIOS Version:	1.10
BIOS Date:	10/06/2022
BIOS Revision:	1.10
Firmware Revision:	1.10

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9654)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = 14.1

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
Fortran | 648.exchange2_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang  
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

**SPECspeed®2017\_int\_base = 14.0**

**SPECspeed®2017\_int\_peak = 14.1**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Oct-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9654)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

605.mcf\_s (continued):

```
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

625.x264\_s: basepeak = yes

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIB -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdaloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9654)

**SPECspeed®2017\_int\_base = 14.0**

**SPECspeed®2017\_int\_peak = 14.1**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-23 09:38:11-0400.

Report generated on 2022-11-10 14:44:23 by CPU2017 PDF formatter v6442.

Originally published on 2022-11-10.