



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Jun-2022

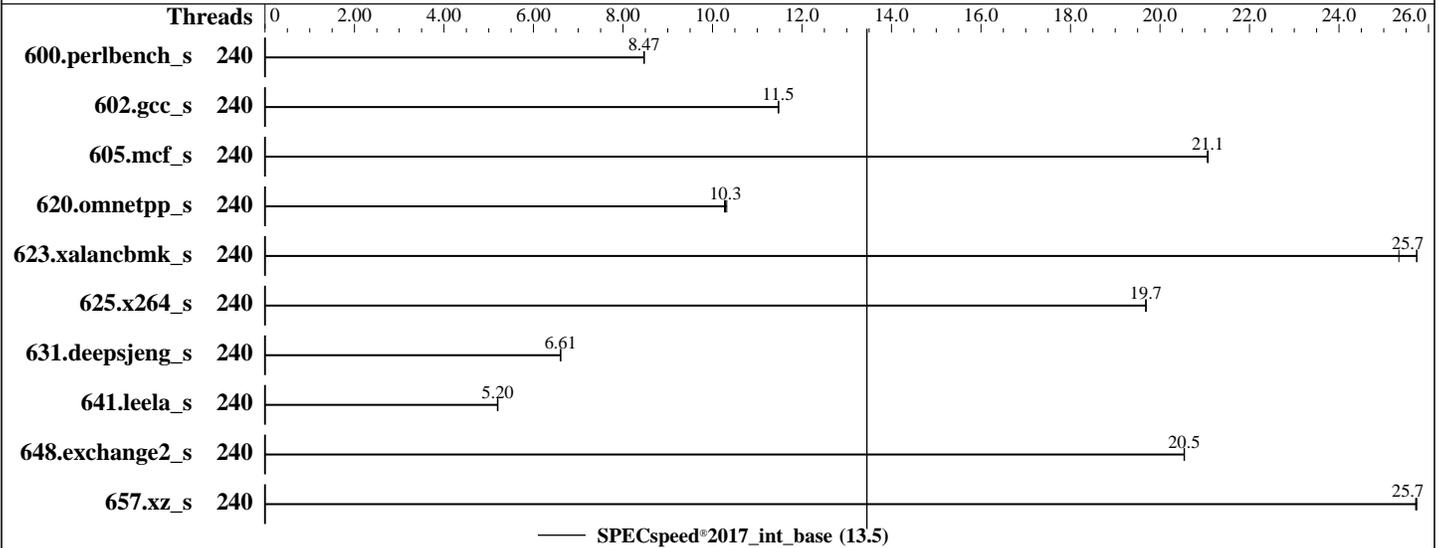

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
 Max MHz: 3500  
 Nominal: 1900  
 Enabled: 120 cores, 2 chips, 2 threads/core  
 Orderable: 1.2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 112.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version ESE109C 0.79 released Nov-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022  
**Hardware Availability:** Feb-2023  
**Software Availability:** Jun-2022

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	240	209	8.48	<u>210</u>	<u>8.47</u>	210	8.47									
602.gcc_s	240	347	11.5	<u>347</u>	<u>11.5</u>	347	11.5									
605.mcf_s	240	224	21.1	<u>224</u>	<u>21.1</u>	224	21.1									
620.omnetpp_s	240	158	10.3	<u>159</u>	<u>10.3</u>	159	10.3									
623.xalancbmk_s	240	55.0	25.7	<u>55.1</u>	<u>25.7</u>	55.9	25.3									
625.x264_s	240	<u>89.6</u>	<u>19.7</u>	89.6	19.7	89.6	19.7									
631.deepsjeng_s	240	217	6.60	<u>217</u>	<u>6.61</u>	217	6.61									
641.leela_s	240	328	5.20	<u>328</u>	<u>5.20</u>	328	5.19									
648.exchange2_s	240	143	20.5	<u>143</u>	<u>20.5</u>	143	20.5									
657.xz_s	240	<u>240</u>	<u>25.7</u>	240	25.7	240	25.7									

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.8-ic2022.1/lib/intel64:/home/cpu2017-1.1.8-ic2022.1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.5

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022  
**Hardware Availability:** Feb-2023  
**Software Availability:** Jun-2022

### General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Operating Mode set to Custom Mode  
CPU P-State Control set to Legacy  
SNC set to SNC4

Sysinfo program /home/cpu2017-1.1.8-ic2022.1/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Fri Dec 2 00:19:15 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8490H  
2 "physical id"s (chips)  
240 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 60  
siblings : 120  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59

From lscpu from util-linux 2.37.2:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 46 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 240  
On-line CPU(s) list: 0-239  
Vendor ID: GenuineIntel  
Model name: Intel(R) Xeon(R) Platinum 8490H  
CPU family: 6  
Model: 143  
Thread(s) per core: 2  
Core(s) per socket: 60  
Socket(s): 2  
Stepping: 6  
Frequency boost: enabled  
CPU max MHz: 1901.0000

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.5

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

### Platform Notes (Continued)

```

CPU min MHz:                800.0000
BogoMIPS:                    3800.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 sse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd
fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d
arch_capabilities
Virtualization:              VT-x
L1d cache:                    5.6 MiB (120 instances)
L1i cache:                    3.8 MiB (120 instances)
L2 cache:                     240 MiB (120 instances)
L3 cache:                     225 MiB (2 instances)
NUMA node(s):                 8
NUMA node0 CPU(s):            0-14,120-134
NUMA node1 CPU(s):            15-29,135-149
NUMA node2 CPU(s):            30-44,150-164
NUMA node3 CPU(s):            45-59,165-179
NUMA node4 CPU(s):            60-74,180-194
NUMA node5 CPU(s):            75-89,195-209
NUMA node6 CPU(s):            90-104,210-224
NUMA node7 CPU(s):            105-119,225-239
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1:     Mitigation; usercopy/swaps barriers and __user
pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

/proc/cpuinfo cache data  
cache size : 115200 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 120 121 122 123 124 125 126 127 128 129  
130 131 132 133 134

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.5

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

### Platform Notes (Continued)

```

node 0 size: 64133 MB
node 0 free: 63518 MB
node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 135 136 137 138 139 140 141
142 143 144 145 146 147 148 149
node 1 size: 64504 MB
node 1 free: 63666 MB
node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 150 151 152 153 154 155 156
157 158 159 160 161 162 163 164
node 2 size: 64504 MB
node 2 free: 64214 MB
node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 165 166 167 168 169 170 171
172 173 174 175 176 177 178 179
node 3 size: 64504 MB
node 3 free: 64251 MB
node 4 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 180 181 182 183 184 185 186
187 188 189 190 191 192 193 194
node 4 size: 64504 MB
node 4 free: 64233 MB
node 5 cpus: 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 195 196 197 198 199 200 201
202 203 204 205 206 207 208 209
node 5 size: 64504 MB
node 5 free: 64278 MB
node 6 cpus: 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 210 211 212 213 214 215
216 217 218 219 220 221 222 223 224
node 6 size: 64504 MB
node 6 free: 64281 MB
node 7 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 225 226 227
228 229 230 231 232 233 234 235 236 237 238 239
node 7 size: 64457 MB
node 7 free: 64234 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  21  21  21  21
1:  12  10  12  12  21  21  21  21
2:  12  12  10  12  21  21  21  21
3:  12  12  12  10  21  21  21  21
4:  21  21  21  21  10  12  12  12
5:  21  21  21  21  12  10  12  12
6:  21  21  21  21  12  12  10  12
7:  21  21  21  21  12  12  12  10

```

```

From /proc/meminfo
MemTotal:      527992792 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.5

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

### Platform Notes (Continued)

```
uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Dec 2 00:17
```

```
SPEC is set to: /home/cpu2017-1.1.8-ic2022.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 446G 15G 431G 4% /
```

```
From /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial: 1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
6x Hynix HMCG88AEBRA115N 32 GB 2 rank 4800
10x Hynix HMCG88AEBRA168N 32 GB 2 rank 4800
```

```
BIOS:
BIOS Vendor: Lenovo
BIOS Version: ESE109C-0.79
BIOS Date: 11/22/2022
BIOS Revision: 0.79
Firmware Revision: 0.72
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Jun-2022

## Compiler Version Notes (Continued)

-----  
C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

-----  
Fortran | 648.exchange2\_s(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650 V3  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_int\_base = 13.5

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Jun-2022

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-01 11:19:14-0500.

Report generated on 2024-01-29 17:14:55 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-10.