



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

**SPECSpeed®2017\_fp\_base = 434**

**SPECSpeed®2017\_fp\_peak = 444**

CPU2017 License: 9017


**Test Date:** Dec-2022

Test Sponsor: Lenovo Global Technology

**Hardware Availability:** Dec-2022

Tested by: Lenovo Global Technology

**Software Availability:** Nov-2022

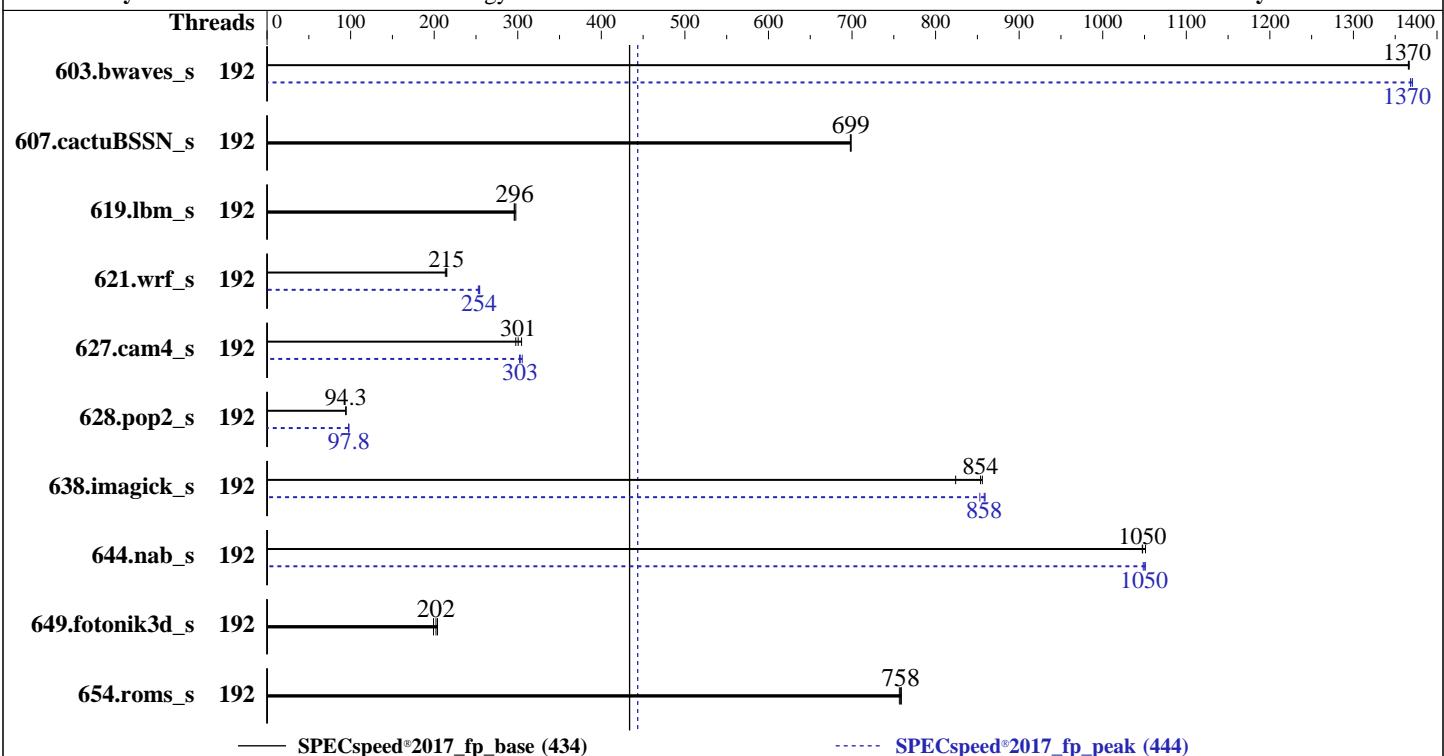

Hardware		Software	
CPU Name:	AMD EPYC 9654	OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64)
Max MHz:	3700		Kernel 5.14.21-150400.22-default
Nominal:	2400	Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	192 cores, 2 chips	Parallel:	Yes
Orderable:	2 chips	Firmware:	Lenovo BIOS Version QGE105O 1.10 released Dec-2022
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	xfs
L2:	1 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)	Other:	None
Storage:	1 x 3.84 TB NVME SSD	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage
Other:	None		



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	43.2	1370	<b>43.2</b>	<b>1370</b>	43.2	1370	192	43.1	1370	<b>43.1</b>	<b>1370</b>	43.0	1370
607.cactuBSSN_s	192	23.9	699	<b>23.9</b>	<b>699</b>	23.9	698	192	23.9	699	<b>23.9</b>	<b>699</b>	23.9	698
619.lbm_s	192	17.6	298	<b>17.7</b>	<b>296</b>	17.7	296	192	17.6	298	<b>17.7</b>	<b>296</b>	17.7	296
621.wrf_s	192	<b>61.6</b>	<b>215</b>	62.0	213	61.5	215	192	52.3	253	<b>52.1</b>	<b>254</b>	52.0	254
627.cam4_s	192	29.1	305	<b>29.5</b>	<b>301</b>	29.8	298	192	29.3	302	29.0	305	<b>29.3</b>	<b>303</b>
628.pop2_s	192	126	94.3	<b>126</b>	<b>94.3</b>	126	94.4	192	121	97.8	122	97.6	<b>121</b>	<b>97.8</b>
638.imagick_s	192	16.9	856	<b>16.9</b>	<b>854</b>	17.5	824	192	<b>16.8</b>	<b>858</b>	16.9	853	16.8	859
644.nab_s	192	16.6	1050	16.7	1050	<b>16.7</b>	<b>1050</b>	192	<b>16.6</b>	<b>1050</b>	16.7	1050	16.6	1050
649.fotonik3d_s	192	45.8	199	<b>45.1</b>	<b>202</b>	44.7	204	192	45.8	199	<b>45.1</b>	<b>202</b>	44.7	204
654.roms_s	192	20.7	759	20.8	757	<b>20.8</b>	<b>758</b>	192	20.7	759	20.8	757	<b>20.8</b>	<b>758</b>

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactubSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_speed_aocc400_genoa_B_lib
     /lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"
```

Environment variables set by runcpu during the 603.bwaves\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 621.wrf\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 627.cam4\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 628.pop2\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 638.imagick\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 644.nab\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance

SMT Mode set to Disabled

```
Sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost Tue Dec 27 16:26:33 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 9654 96-Core Processor
  2 "physical id"s (chips)
  192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 96
  siblings : 96
  physical 0: cores 0 1 2 3 4 5 6 7 20 21 22 23 36 37 38 39 48 49 50 51 52 53 54 55
  64 65 66 67 68 69 70 71 84 85 86 87 96 97 98 99 100 101 102 103 112 113 114 115 116
  117 118 119 128 129 130 131 132 133 134 135 144 145 146 147 148 149 150 151 160 161
  162 163 164 165 166 167 176 177 178 179 180 181 182 183
  physical 1: cores 0 1 2 3 4 5 6 7 20 21 22 23 36 37 38 39 48 49 50 51 52 53 54 55
  64 65 66 67 68 69 70 71 84 85 86 87 96 97 98 99 100 101 102 103 112 113 114 115 116
  117 118 119 128 129 130 131 132 133 134 135 144 145 146 147 148 149 150 151 160 161
  162 163 164 165 166 167 176 177 178 179 180 181 182 183
```

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

**SPECSpeed®2017\_fp\_base = 434**

**SPECSpeed®2017\_fp\_peak = 444**

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Platform Notes (Continued)

CPU(s):	192
On-line CPU(s) list:	0-191
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9654 96-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	96
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3707.8120
CPU min MHz:	1500.0000
BogoMIPS:	4799.92
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
Virtualization:	AMD-V
L1d cache:	6 MiB (192 instances)
L1i cache:	6 MiB (192 instances)
L2 cache:	192 MiB (192 instances)
L3 cache:	768 MiB (24 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-95
NUMA node1 CPU(s):	96-191
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 434

SPECspeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Platform Notes (Continued)

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27  
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56  
57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85

86 87 88 89 90 91 92 93 94 95

node 0 size: 386632 MB

node 0 free: 383695 MB

node 1 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114  
115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136  
137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158

159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180

181 182 183 184 185 186 187 188 189 190 191

node 1 size: 386771 MB

node 1 free: 385885 MB

node distances:

node 0 1

0: 10 32

1: 32 10

From /proc/meminfo

MemTotal: 791966512 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15-SP4"

VERSION\_ID="15.4"

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
```

```
ID="sles"
```

```
ID_LIKE="suse"
```

```
ANSI_COLOR="0;32"
```

```
CPE_NAME="cpe:/o:suse:sles:15:sp4"
```

```
uname -a:
```

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Retpolines, IBPB: conditional, IBRS\_FW, STIBP: disabled, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Dec 27 15:38

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	3.5T	27G	3.5T	1%	/

From /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SD665 V3
Product Family:	ThinkSystem
Serial:	1234567890

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

5x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800

3x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Platform Notes (Continued)

16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

BIOS:

BIOS Vendor: Lenovo  
BIOS Version: QGE1050-1.10  
BIOS Date: 12/19/2022  
BIOS Revision: 1.10  
Firmware Revision: 0.90

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
              | 644.nab_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
Fortran       | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

| 654.roms\_s(base, peak)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

```
=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Base Portability Flags (Continued)

```
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang

644.nab\_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3  
-fvector-transform -fscalar-transform -fopenmp=libomp  
-lomp -lamdlibm -lamdaloc -lflang

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

621.wrf\_s (continued):

```
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

627.cam4\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdaloc
-lflang
```

628.pop2\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactusBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 434

SPECSpeed®2017\_fp\_peak = 444

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-O.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-O.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-27 03:26:33-0500.

Report generated on 2023-01-17 18:46:24 by CPU2017 PDF formatter v6442.

Originally published on 2023-01-17.