



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8468)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

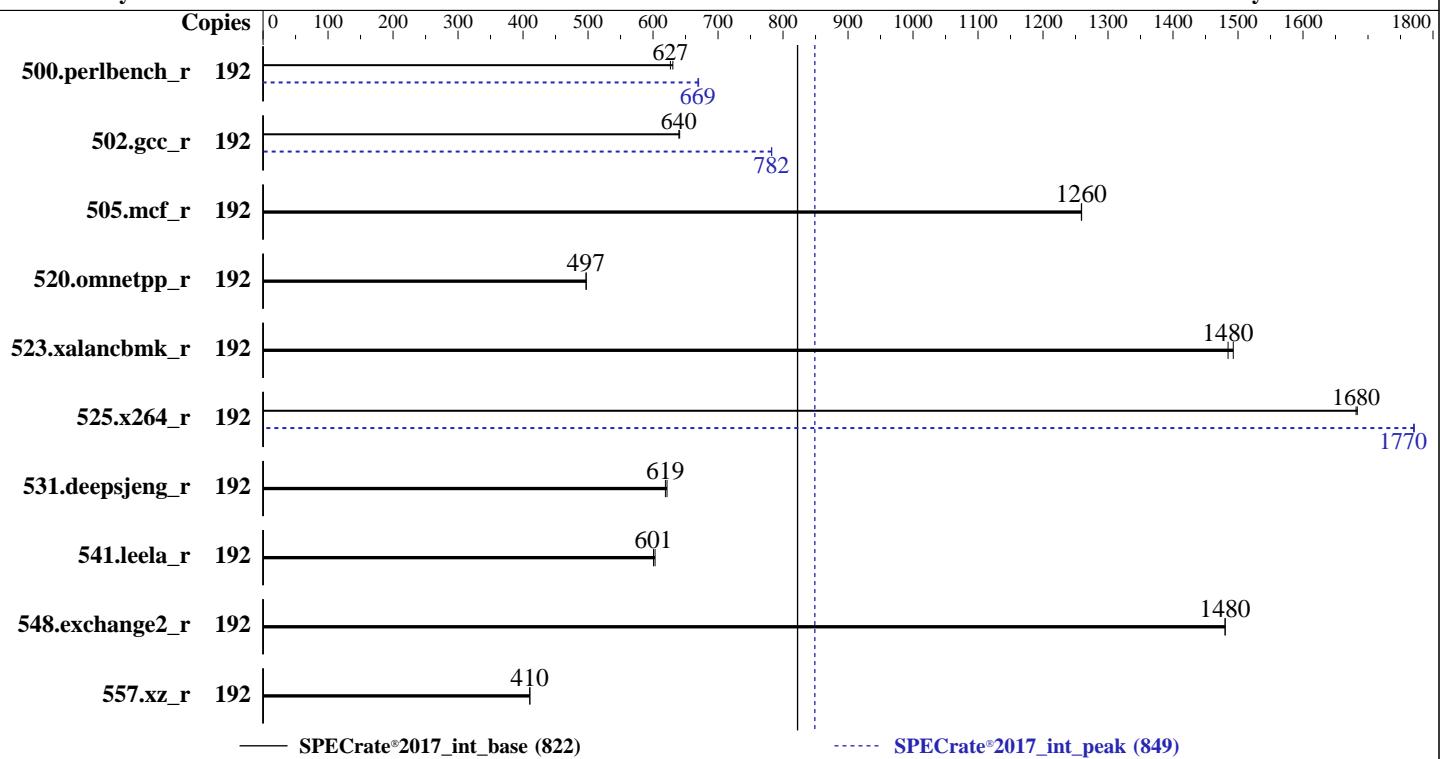

Hardware

CPU Name: Intel Xeon Platinum 8468
 Max MHz: 3800
 Nominal: 2100
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 0.3.1 released Nov-2022
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 822

SPECrate®2017_int_peak = 849

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	485	630	488	627			192	457	669	456	670				
502.gcc_r	192	425	640	424	641			192	347	783	347	782				
505.mcf_r	192	246	1260	246	1260			192	246	1260	246	1260				
520.omnetpp_r	192	507	497	507	497			192	507	497	507	497				
523.xalancbmk_r	192	136	1490	137	1480			192	136	1490	137	1480				
525.x264_r	192	200	1680	200	1680			192	190	1770	190	1770				
531.deepsjeng_r	192	354	621	355	619			192	354	621	355	619				
541.leela_r	192	527	603	529	601			192	527	603	529	601				
548.exchange2_r	192	340	1480	340	1480			192	340	1480	340	1480				
557.xz_r	192	505	411	505	410			192	505	411	505	410				

SPECrate®2017_int_base = 822

SPECrate®2017_int_peak = 849

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/ia32:/mnt/ram
  disk/cpu2017-1.1.9-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 822

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECCrate®2017_int_peak = 849

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
        Sub NUMA Cluster : 4-way Clustering
    DCU Streamer Prefetcher : Disabled
        LLC Prefetch : Disabled
    Dead Line LLC Alloc : Disabled
        Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
        C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
        PCI ASPM L1 Link
            Power Management : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Jan 6 16:24:19 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 822

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECCrate®2017_int_peak = 849

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

```
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS
-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
16:24:19 up 11 min, 1 user, load average: 0.49, 0.81, 1.06
USER      TTY      FROM          LOGIN@    IDLE     JCPU     PCPU WHAT
root      ttys1     -           16:23   26.00s  1.02s  0.00s /bin/bash ./dell-norun-specrate.sh
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority       (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4124373
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4124373
virtual memory             (kbytes, -v) unlimited
file locks                (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-main.sh rate
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 822

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECCrate®2017_int_peak = 849

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

```
/bin/bash ./dell-norun-speccrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-speccrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode rate
  --tune base:peak --size reffrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
```

```
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) Platinum 8468  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 143  
stepping        : 8  
microcode       : 0x2b000111  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores      : 48  
siblings        : 96  
2 physical ids (chips)  
192 processors (hardware threads)  
physical id 0: core ids 0-47  
physical id 1: core ids 0-47  
physical id 0: apicids 0-95  
physical id 1: apicids 128-223  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         46 bits physical, 57 bits virtual  
Byte Order:            Little Endian  
CPU(s):                192  
On-line CPU(s) list:   0-191  
Vendor ID:             GenuineIntel  
Model name:            Intel(R) Xeon(R) Platinum 8468  
CPU family:            6  
Model:                 143  
Thread(s) per core:    2  
Core(s) per socket:    48  
Socket(s):             2  
Stepping:              8  
BogoMIPS:              4200.00  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                           nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8468)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_int_base = 822

SPECrate®2017_int_peak = 849

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```

ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitual tme avx512_vpocntdq la57 rdpid
bus_lock_detect coldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 192 MiB (96 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,46,100,104,108,112,116,120,124,128,132,13
6,140
NUMA node1 CPU(s): 48,52,56,60,64,68,72,76,80,84,88,92,144,148,152,156,160,164,168,172,176,18
0,184,188
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,98,102,106,110,114,118,122,126,130,134,1
38,142
NUMA node3 CPU(s): 50,54,58,62,66,70,74,78,82,86,90,94,146,150,154,158,162,166,170,174,178,18
2,186,190
NUMA node4 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,97,101,105,109,113,117,121,125,129,133,13
7,141
NUMA node5 CPU(s): 49,53,57,61,65,69,73,77,81,85,89,93,145,149,153,157,161,165,169,173,177,18
1,185,189
NUMA node6 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,99,103,107,111,115,119,123,127,131,135,1
39,143
NUMA node7 CPU(s): 51,55,59,63,67,71,75,79,83,87,91,95,147,151,155,159,163,167,171,175,179,18
3,187,191
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,46,100,104,108,112,116,120,124,128,132,136,140
node 0 size: 128398 MB
node 0 free: 119957 MB
node 1 cpus: 48,52,56,60,64,68,72,76,80,84,88,92,144,148,152,156,160,164,168,172,176,180,184,188
node 1 size: 129017 MB
node 1 free: 128755 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 822

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECCrate®2017_int_peak = 849

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

```
node 2 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,98,102,106,110,114,118,122,126,130,134,138,142
node 2 size: 129017 MB
node 2 free: 128507 MB
node 3 cpus: 50,54,58,62,66,70,74,78,82,86,90,94,146,150,154,158,162,166,170,174,178,182,186,190
node 3 size: 129017 MB
node 3 free: 128806 MB
node 4 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,97,101,105,109,113,117,121,125,129,133,137,141
node 4 size: 129017 MB
node 4 free: 128871 MB
node 5 cpus: 49,53,57,61,65,69,73,77,81,85,89,93,145,149,153,157,161,165,169,173,177,181,185,189
node 5 size: 129017 MB
node 5 free: 128851 MB
node 6 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,99,103,107,111,115,119,123,127,131,135,139,143
node 6 size: 128983 MB
node 6 free: 128654 MB
node 7 cpus: 51,55,59,63,67,71,75,79,83,87,91,95,147,151,155,159,163,167,171,175,179,183,187,191
node 7 size: 128643 MB
node 7 free: 128451 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 12 12 12 21 21 21 21
  1: 12 10 12 12 21 21 21 21
  2: 12 12 10 12 21 21 21 21
  3: 12 12 12 10 21 21 21 21
  4: 21 21 21 10 12 12 12 12
  5: 21 21 21 21 12 10 12 12
  6: 21 21 21 21 12 10 12 12
  7: 21 21 21 21 12 12 10 10
```

```
-----  
9. /proc/meminfo  
MemTotal: 1055862188 kB
```

```
-----  
10. who -r  
run-level 3 Jan 6 16:13
```

```
-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running
```

```
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        apparmor audited cron firewalld getty@ haveged irqbalance issue-generator kbdsettings kdump  
                kdump-early postfix purge-kernels rollback sshd wicked wickedd-auto4 wickedd-dhcp4  
                wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables  
                grub2-once haveged-switch-root issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rdisc  
                rpcbind rpmconfigcheck rsyncd serial-getty@ systemd-boot-check-no-failures  
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd  
indirect       wickedd
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=1d1balla-5385-4a23-a056-33a765172fa4  
splash=silent
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8468)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_int_base = 822

SPECrate®2017_int_peak = 849

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```
mitigations=auto
quiet
security=apparmor
crashkernel=327M,high
crashkernel=72M,low

-----
14. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

-----
15. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag              1
max_ptes_none       511
max_ptes_shared     256
max_ptes_swap       64
pages_to_scan       4096
scan_sleep_millisecs 10000

-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

-----
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  125G  3.7G  122G   3% /mnt/ramdisk

-----
19. /sys/devices/virtual/dmi/id
Vendor:        Dell Inc.
Product:       PowerEdge MX760c
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECCrate®2017_int_base = 822

SPECCrate®2017_int_peak = 849

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

Product Family: PowerEdge
Serial: SL6M702

20. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
5x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
1x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 0.3.1
BIOS Date: 11/24/2022
BIOS Revision: 0.3

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 822

SPECrate®2017_int_peak = 849

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-fipa -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 822

SPECrate®2017_int_peak = 849

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fno-standard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 822

SPECrate®2017_int_peak = 849

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

```
502.gcc_r: -m32  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 822

SPECrate®2017_int_peak = 849

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-06 16:24:18-0500.

Report generated on 2024-01-29 17:21:19 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-01.